

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[TE Connectivity AMP Connectors](#)
[640475-2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

LOC	QST	REVISONS			DATE	OWN	APPO
		P	UN	DESCRIPTION			
CM	00	P	UN	ECO-07-012862	12JUN07	KW	DB

D	C	B	A	95.10	[3.744]	24	5-640475-4
				91.13	[3.588]	23	5-640475-3
D	C	B	A	87.17	[3.432]	22	5-640475-2
				83.21	[3.276]	21	5-640475-1
D	C	B	A	79.25	[3.120]	20	5-640475-0
				75.29	[2.964]	19	4-640475-9
D	C	B	A	71.32	[2.808]	18	4-640475-8
				67.36	[2.652]	17	4-640475-7
D	C	B	A	63.40	[2.496]	16	4-640475-6
				59.44	[2.340]	15	4-640475-5
D	C	B	A	55.47	[2.184]	14	4-640475-4
				51.51	[2.028]	13	4-640475-3
D	C	B	A	47.55	[1.872]	12	4-640475-2
				43.59	[1.716]	11	4-640475-1
D	C	B	A	39.62	[1.560]	10	4-640475-0
				35.66	[1.404]	9	3-640475-9
D	C	B	A	31.70	[1.248]	8	3-640475-8
				27.74	[1.092]	7	3-640475-7
D	C	B	A	23.77	[.936]	6	3-640475-6
				19.81	[.780]	5	3-640475-5
D	C	B	A	15.85	[.624]	4	3-640475-4
				11.89	[.468]	3	3-640475-3
D	C	B	A	7.92	[.312]	2	3-640475-2
				95.10	[3.744]	24	2-640475-4
D	C	B	A	91.13	[3.588]	23	2-640475-3
				87.17	[3.432]	22	2-640475-2
D	C	B	A	83.21	[3.276]	21	2-640475-1
				79.25	[3.120]	20	2-640475-0
D	C	B	A	75.29	[2.964]	19	1-640475-9
				71.32	[2.808]	18	1-640475-8
D	C	B	A	67.36	[2.652]	17	1-640475-7
				63.40	[2.496]	16	1-640475-6
D	C	B	A	59.44	[2.340]	15	1-640475-5
				55.47	[2.184]	14	1-640475-4
D	C	B	A	51.51	[2.028]	13	1-640475-3
				47.55	[1.872]	12	1-640475-2
D	C	B	A	43.59	[1.716]	11	1-640475-1
				39.62	[1.560]	10	1-640475-0
D	C	B	A	35.66	[1.404]	9	640475-9
				31.70	[1.248]	8	640475-8
D	C	B	A	27.74	[1.092]	7	640475-7
				23.77	[.936]	6	640475-6
D	C	B	A	19.81	[.780]	5	640475-5
				15.85	[.624]	4	640475-4
D	C	B	A	11.89	[.468]	3	640475-3
				7.92	[.312]	2	640475-2
D	C	B	A	NO. OF CIRCUITS		PART NO	
				DIM A			

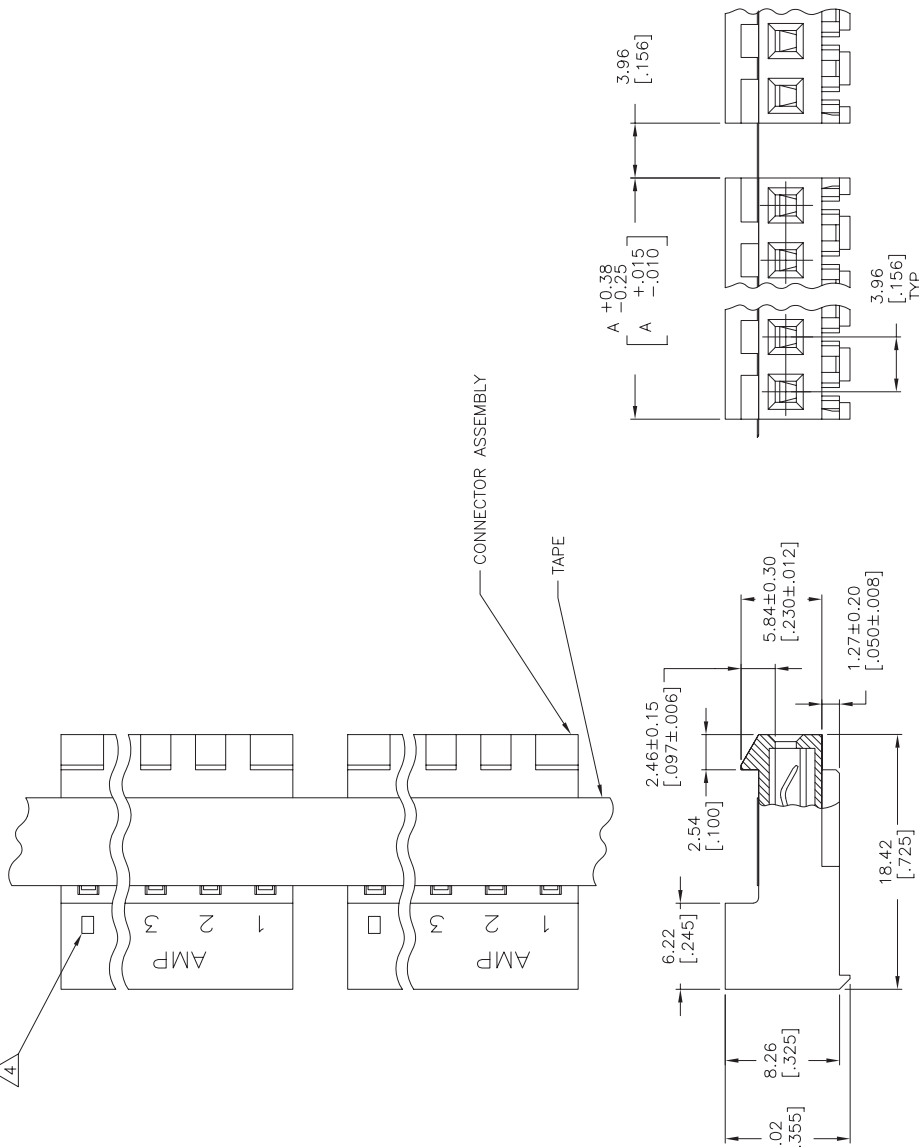

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (WHITE).
CONTACTS - THICK COPPER ALLOY
BRIGHT TIN-LEAD 0.00203[.000080] MIN THICK
FOR CONTACTS 640475-2 THRU 2-640475-4
MATTIE WHISKER MITIGATED TIN 0.00203[.000080]
MIN THICKNESS OVER NICKEL UNDERPLATE FOR
3-640475-2 THRU 5-640475-4

2. CONTACTS ACCEPT 24 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.

3. CONTACTS MUST ACCEPT 1.14±0.03 [.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DATE	02 MAY 96
BY	LEWIS
FOR	R. SWING
PRODUCT SPEC	MTA-156 CONNECTOR ASSEMBLY, 24 AWG, STANDARD TAPE MOUNTED
APPROVED	108-1051
APPLICATION SPEC	114-1020
WEIGHT	—
FINISH	—

METRIC