

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TE Connectivity AMP Connectors](#)
[201511-1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

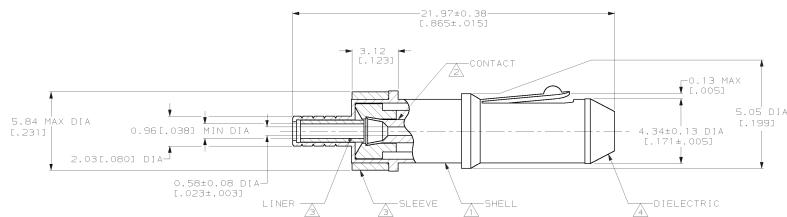

RECOMMENDED STRIP LENGTH

LOC	Q151			REVISIONS				
AJ	16	P	P	ZONE	LTR	DESCRIPTION	DATE	APPD
				AJ		REV PER 0020-0259-00	27 JUN93	MO

1. BRASS PER QQ-B-526.
 2. BERYLLIUM COPPER PER ASTM-B-196
 3. NYLON PER ASTM-D-4066, BLACK
 4. POLYMETHYLPENTENE GENERAL PURPOSE, NATURAL.
 .000761.0000301 MINIMUM GOLD PER MIL-G-45204.
 .002541.0001001 MINIMUM GOLD PER MIL-G-45204
 7. SEE IS 1770.

OBSELETE			.030 OUNCES	201511-3
			.030 OUNCES	201511-1
	CONTACT PLATING	SHELL PLATING	WEIGHT	PART NUMBER

						PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES 2 P.L.C DEC = .008 B P.L.C DEC = .004 ANGLES DEC = .5		OR 1-B-90 J. LIPPERT SW SW 2-23-80 M. SNEED R. ADAMS AFPD 2-23-80 N. SNEED PRODUCT SPEC 10B-12021		AMP AND INCORPORATED Newburgh, N.Y. 11766			
FINISH				NAME		PIN, MINIATURE SERIES	
		APPLICATION SPEC -		SIZE CASE CODE D 00779		DRAWING NO 201511	
		REMARKS SEE TABLE		SCALE B:1		SHEET 1 OF 1	

CUSTOMER DRAWING