

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[750-10010-00500](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


UNIT:mm

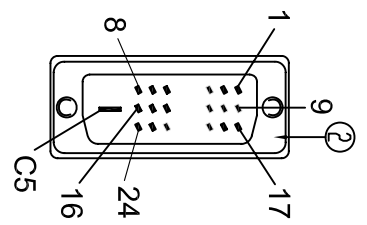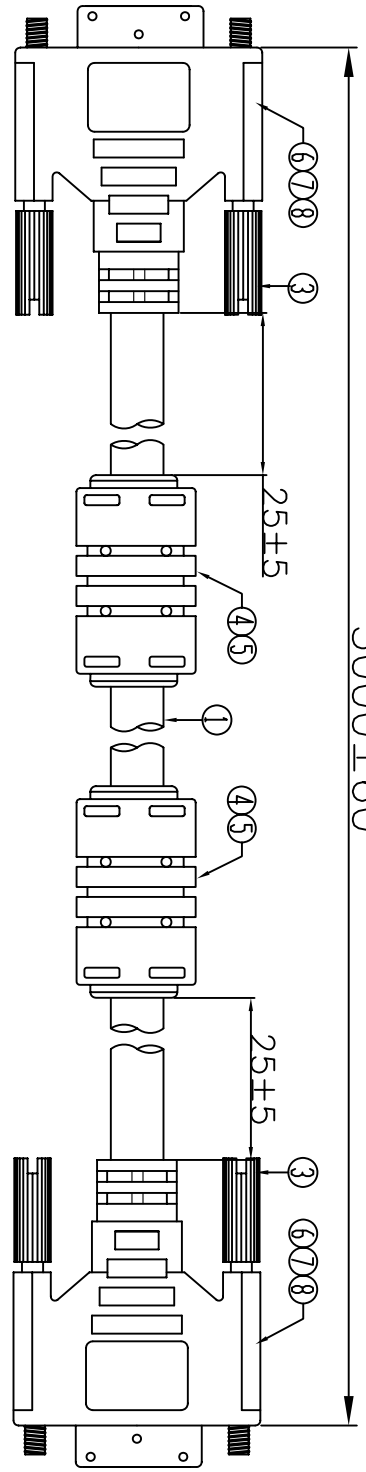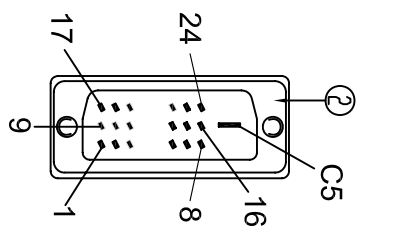

Electronic Test:
 1.100% Test,(Open,Short,Miss Wire)
 2.Contact Resistance:2 ohm max.
 3.Insulation Resistance:10M ohm min.
 4.Hi-Pot:300V DC/10ms
 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

⑧	TUBE	8	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm
		8	HEAT SHRINK TUBE BLACK OD1.0mm L=15mm
⑦	Copper	2	HEAT SHRINK TUBE BLACK OD0.8mm L=25mm
		2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑥	IN JACKET	8g	CLEAR PE(NM-15)
		30g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑤	OUT JACKET	20g	BLACK PVC 45P (CH-002)
④	FERRITE	2	Core:RH17.5*10.6*28.5mm
③	SCREW	4	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
②	CONN	2	DVI MALE 18+1 INSULATION BLACK,SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [(28AWG/1P+DW+AL/MY)*4C+28AWG*5C]+AL/MY+BD+D.W+BD+JACKET:BLACK OD:7.0±0.15mm L=5000±50/-0mm.

<p>CNC Tech, LLC Industrial Cable and Connector Technology</p>						
				DRAWN BY	ZHONGHS	DRAWING NO.
				CHECKED BY		CUSTOMER
				APPROVAL BY		ITEM NO.
DECIDE BY		DATE	750-10010-00500			
VERSIONS/EDITEN	A/0	PROJECTION	2012-02-07			



4 3 2 1