

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[750-10011-00500](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


UNIT:mm

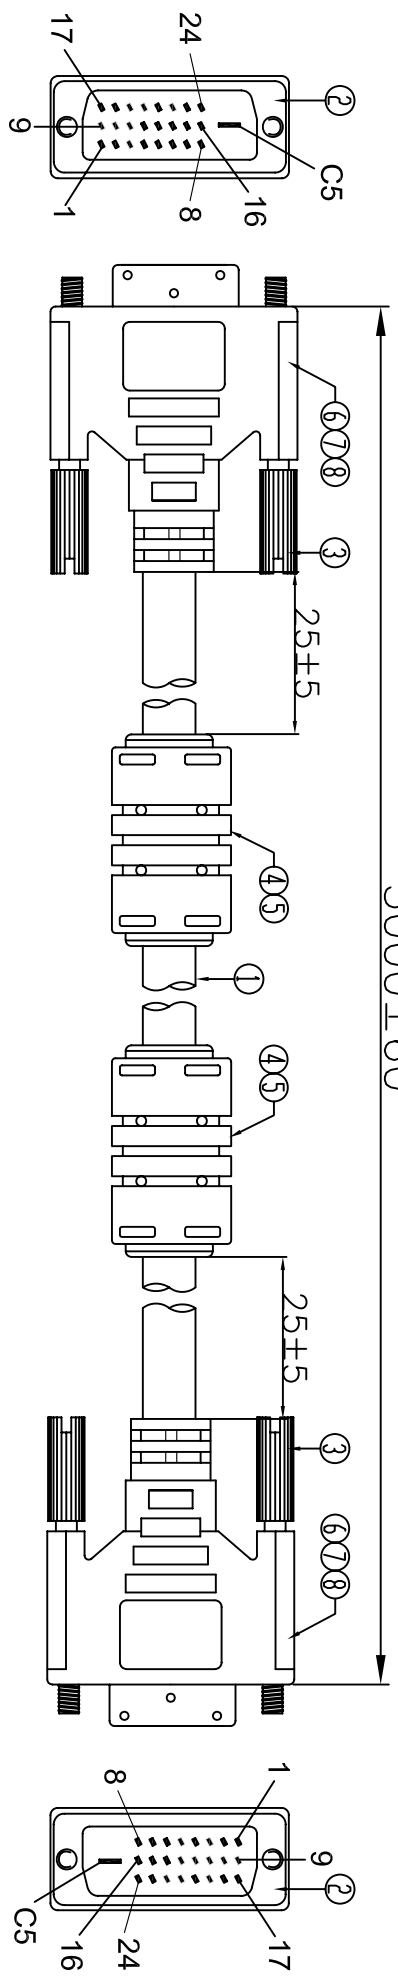

Electronic Test:

1. 100% Test,(Open,Short,Miss Wire)
2. Contact Resistance:2 ohm max.
3. Insulation Resistance:10M ohm min.
4. Hi-Pot:300V DC/10ms
5. BENDING TEST:ANGLE 90°, BENDING 2~3 TIMES UP AND DOWN.

⑧	TUBE	14	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm.
		8	HEAT SHRINK TUBE BLACK OD1.5mm L=15mm.
⑦	Copper	2	HEAT SHRINK TUBE BLACK OD1.0mm L=25mm.
		2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑥	NI JACKET	8g	CLEAR PE(NM-15)
		30g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑤	OUT JACKET	20g	BLACK PVC 45P (CH-002)
④	FERRITE	2	Core:RH17.5*10.6*28.5mm
③	SCREW	4	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
②	CONN	2	DVI MALE 24+1 INSULATION BLACK,SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [(28AWG/1P+DW+AL/MY)*7C+28AWG*5C]+AL/MY+BD+D.W+BD+JACKET:BLACK OD:8.6±0.15mm L=5000±20mm.

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	750-10011-00500
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITEN	A/0	PROJECTION	

4 3 2 1