

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Tamura](#)
[PFT12-28](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

MODEL NUMBER
PFT12-28

REV. Status LOW PROFILE THREE FLANGE BOBBIN 12VA TRANSFORMER APPROVED TO UL506

REVISION -
05/03/00 TS



A. Electrical Specifications (@ 25° C)

1. Input Voltage and Frequency; 115/230V 50/60Hz
2. Output Voltage; 28V±5% @ 0.187A
16V±5% @ 0.36A
3. Output Power; 12VA
4. Insulation Resistance;
100MΩ MIN @ 500VDC, Pri to Sec, Pri to Core, Sec to Core
5. Hi-Pot;
1500Vrms 1 minute @ Pri to Sec, Pri to Core
1500Vrms 1 minute @ Sec to Core


B. Marking; PFT12-28, MICROTRAN, date code, country of origin, terminal numbers and safety symbols.

C. Safety:
UL506 General purpose, File No: E79781

D. Schematic Diagram:

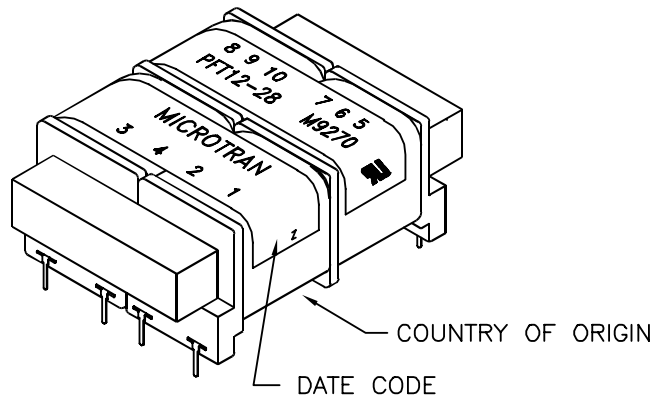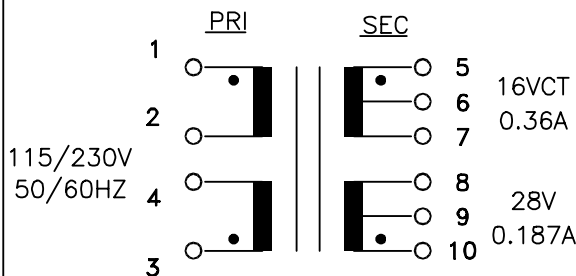

E. Mechanical Specifications:

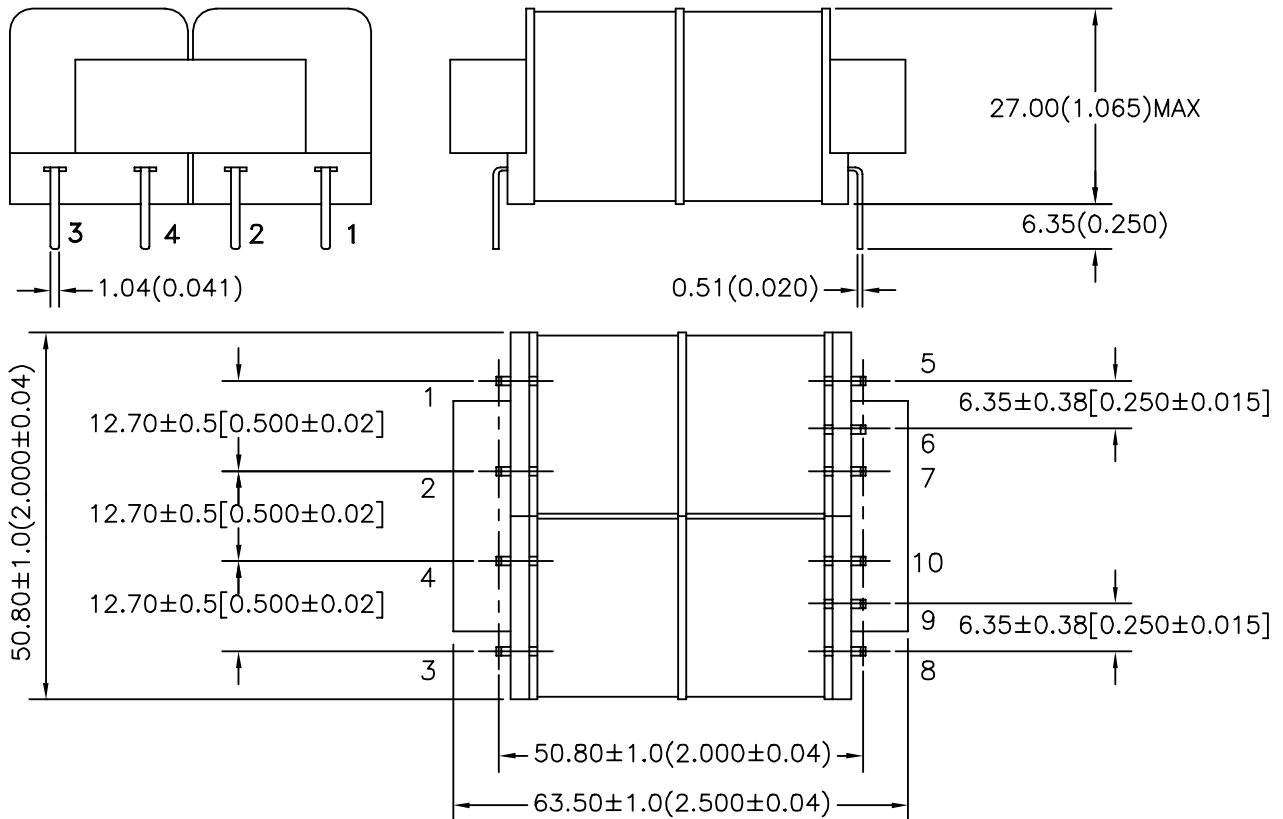

PREPARED BY:

D. Rund
ENGINEER:

T. Shiozawa
QUALITY CONTROL:

D. Kelley
APPROVED:

J. Coleman

DWG CONTROL NO. P-A1-12486
ACAD\3F\A1124861.DWG

REV -

3 FLANGE BOBBIN
POWER TRANSFORMER

PFT12-28

MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

DIM: MM(IN) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.