

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0008550106](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

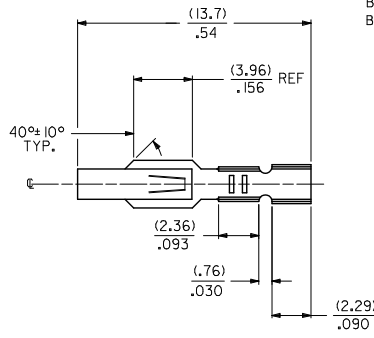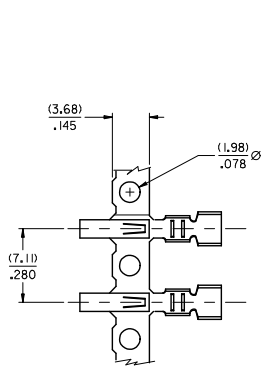

MATERIAL CODE
(.28)/.0106 THK
BLANK=BRASS
B=PHOS BRONZE

WINDING SPEC.
A=CHAIN, PER WINDING DETAIL "A"
BLANK=CHAIN, PER WINDING DETAIL "B"
L=LOOSE

OPTIONS
BLANK=AS SHOWN
1 = WITH CAT EARS

PLATING CODE
(PER SDES-88)

(122) - OVERALL TIN: (0.00381)/.000150 MIN.
OVER (0.00076)/.000030 MIN. NICKEL

(154) - OVERALL TIN (0.00254)/.000100 MIN.
OVER (0.00127)/.000050 MIN. NICKEL




(224) - OVERALL MATTE TIN: (0.00508)/.000200 MIN.
OVER (0.00127)/.000050 MIN. NICKEL

(550) - SELECT GOLD: (0.00038)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.


(555) - SELECT GOLD: (0.00038)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.

(558) - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.

(P909) - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN

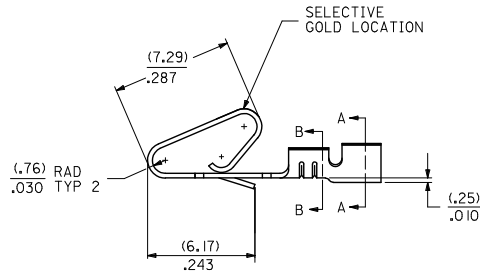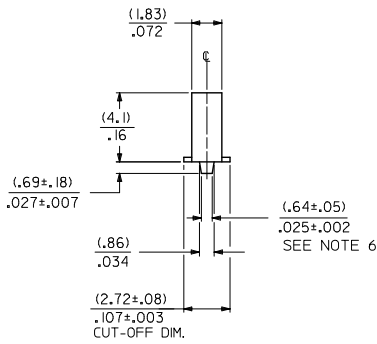

SECTION B-B
BACKGROUND OMITTED



SECTION A-A
BACKGROUND OMITTED

1. MATERIAL: SEE LEGEND
2. FINISH: SEE LEGEND
3. PRODUCT SPECIFICATION: PS-08-50
4. CRIMP ACCEPTS 22 TO 26 GA. WIRE WITH (1.65)/0.65 MAX INSULATION DIA.
5. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
6. OPTIONAL DESIGN (.86±.05)/.034±.002
7. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002

ADD WINDING VIEW EC NO: UCP2014-431 DRAWN BY: 2014/04/07 CHKD BY: 2014/04/07 APPROVED BY: 2014/04/21 X1	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
					MM/IN		---	INCH			
					mm	INCH	DRAWN BY	DATE		TITLE	
					4 PLACES	± ---	PEREZ / AR	01/29/87		CRIMP TERMINAL	
					3 PLACES	± .010	CHECKED BY	DATE		(3.96)/.156 CENTERS	
					2 PLACES	± .025	PATEL	01/29/87		22 TO 26 GA WIRE	
					1 PLACE	± .036	APPROVED BY	DATE			
					0 PLACE	± ---	FSMITH	2014/04/21		molex	
					ANGULAR ±1/2°		MATERIAL NO.			DOCUMENT NO.	
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-2578	
REV					SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 1 OF 2		

2578-(***)*


2578-B-(***)*

PART NO. ENG. NO.

PART NO. ENG. NO.



08-50-0107 2578-(P909)
08-50-0108 2578-(P909)L
08-50-0111 2578-(154)
08-50-0112 2578-(154)L
08-56-0107 2578-(550)
08-56-0108 2578-(550)L
08-55-0105 2578-(555)
08-55-0106 2578-(555)L
08-50-0061 2578-(224)
08-50-0062 2578-(224)L
08-55-0137 2578-(558)A
08-55-0137 2578-(558)L
08-50-0018 2578-(154)
08-50-0019 2578-(154)L
08-55-0123 2578-(558)
08-55-0123 2578-(558)L

08-50-0133 2578-B-(P909)
08-50-0134 2578-B-(P909)L
08-65-0116 2578-B-(555)
08-65-0117 2578-B-(555)L
08-60-0003 2578-B-(122)
08-60-0004 2578-B-(122)L
08-65-0110 2578-B-(558)
08-65-0111 2578-B-(558)L
08-58-0125 2578-B-(550)
08-58-0126 2578-B-(550)L



WINDING DETAIL 'A'

WINDING DETAIL 'B'



SEE SHEET 1
EC NO: UCP2014-4131
DRAWN BY: 2014/04/07
CHKD BY: 2014/04/07
APPROVED BY: 2014/04/21
REV

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± .005 ± .005
3 PLACES ± .010 ± .010
2 PLACES ± 0.25 ± .014
1 PLACE ± 0.36 ± .014
0 PLACE ± .005 ± .005
ANGULAR ± 1/2°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN
DRAWN BY: PEREZ/AR
DATE: 01/29/87
CHECKED BY: PATEL
DATE: 01/29/87
APPROVED BY: F SMITH
DATE: 2014/04/21
MATERIAL NO.
SEE CHART

SCALE: --- INCH
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION
TITLE: CRIMP TERMINAL (3.96)/.156 CENTERS 22 TO 26 GA WIRE
molex
DOCUMENT NO.: SD-2578
SHEET NO.: 2 OF 2