

## **Excellent Integrated System Limited**






Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Molex Connector Corporation](#)  
[0015800187](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

OPTION A

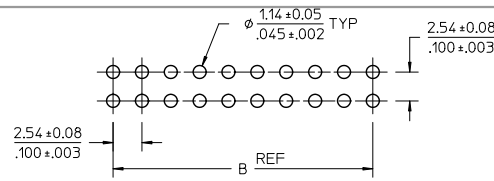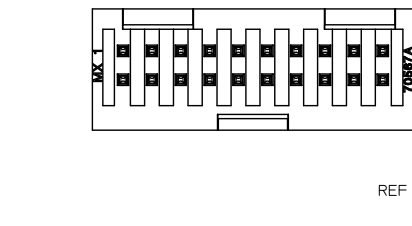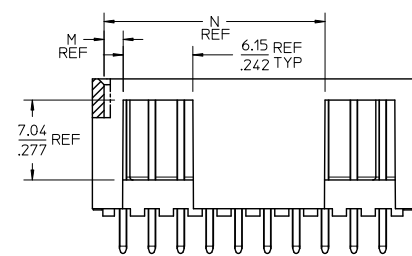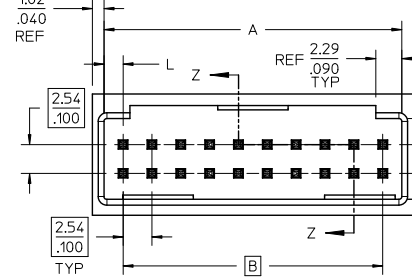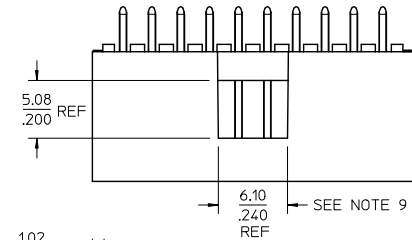

PCB LAYOUT: COMPONENT SIDE  
TYPICAL PCB THICKNESS: 2.367/.093






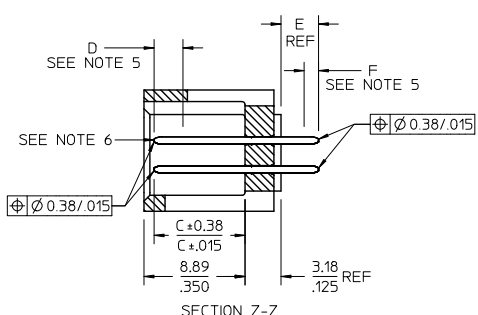


- NOTES:
1. MATERIAL: SHROUDED WAFER: GLASS FILLED, LIQUID CRYSTAL POLYMER, COLOR: BLACK, 94V-0. PINS: COPPER ALLOY.
  2. PLATING:
    - TIN 0.00381/.000150 MINIMUM TIN, OVER NICKEL UNDERPLATE OVERALL
    - 15 GOLD 0.00038/.000015 MINIMUM GOLD PLATE IN SELECTED AREA
    - 0.00191/.000075 MINIMUM TIN IN SELECTED AREA
    - OVER NICKEL UNDERPLATE OVERALL
    - 30 GOLD 0.00076/.000030 MINIMUM GOLD PLATE IN SELECTED AREA
    - 0.00191/.000075 MINIMUM TIN IN SELECTED AREA
    - OVER NICKEL UNDERPLATE OVERALL
  3. PRODUCT SPECIFICATION: PS-70567.
  4. PACKAGING: SEE CHARTS.
  5. MEASURE POINT FOR PLATING THICKNESS.
  6. PIN PUSHOUT FORCE: 4 LBS, MINIMUM IN DIRECTION INDICATED.
  7. FOR ILLUSTRATION PURPOSES, 20 (DUAL 10) CIRCUIT SIZE HEADER SHOWN.
  8. PIN SOLDERABILITY PER MOLEX SPEC, SMES-152.
  9. WINDOW NOT AVAILABLE ON 6 OR 8 CIRCUIT SIZE.
  10. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

CKT	DIM A	DIM B	DIM L	DIM M	DIM N
06	8.43	5.08	1.68	1.68	
	3.32	.200	.066	.066	
08	10.97	7.62	1.68	1.68	
	4.32	.300	.066	.066	
10	13.51	10.16	1.68	4.22	
	5.32	.400	.066	.166	
12	16.05	12.70	1.68	4.22	
	6.32	.500	.066	.166	
14	18.59	15.24	1.68	6.76	
	7.32	.600	.066	.266	
16	21.13	17.78	1.68	6.76	
	8.32	.700	.066	.266	
18	23.67	20.32	1.68	9.30	
	9.32	.800	.066	.366	
20	26.21	22.86	1.68	11.84	19.46
	10.32	.900	.066	.466	.766
22	28.75	25.40	1.68	11.84	22.00
	11.32	1.000	.066	.566	.866
24	31.29	27.94	1.68	11.84	24.54
	12.32	1.100	.066	.666	.966
26	33.83	30.48	1.68	11.84	27.08
	13.32	1.200	.066	.766	1.066
28	36.37	33.02	1.68	11.84	29.62
	14.32	1.300	.066	.866	1.166
30	38.91	35.56	1.68	11.84	32.16
	15.32	1.400	.066	.966	1.266
32	41.45	38.10	1.68	11.84	34.70
	16.32	1.500	.066	1.066	1.366
34	43.99	40.64	1.68	11.84	37.24
	17.32	1.600	.066	1.166	1.466
36	46.53	43.18	1.68	11.84	39.78
	18.32	1.700	.066	1.266	1.566
38	49.07	45.72	1.68	11.84	42.32
	19.32	1.800	.066	1.366	1.666
40	51.61	48.26	1.68	11.84	44.86
	20.32	1.900	.066	1.466	1.766
42	54.15	50.80	1.68	11.84	47.40
	21.32	2.000	.066	1.566	1.866
44	56.69	53.34	1.68	11.84	49.94
	22.32	2.100	.066	1.666	1.966
46	59.23	55.88	1.68	11.84	52.48
	23.32	2.200	.066	1.766	2.066
48	61.77	58.42	1.68	11.84	55.02
	24.32	2.300	.066	1.866	2.166
50	64.31	60.96	1.68	11.84	57.56
	25.32	2.400	.066	1.966	2.266
52	66.85	63.50	1.68	11.84	60.10
	26.32	2.500	.066	2.066	2.366
54	69.39	66.04	1.68	11.84	62.64
	27.32	2.600	.066	2.166	2.466
56	71.93	68.58	1.68	11.84	65.18
	28.32	2.700	.066	2.266	2.566
58	74.47	71.12	1.68	11.84	67.72
	29.32	2.800	.066	2.366	2.666
60	77.01	73.66	1.68	11.84	70.26
	30.32	2.900	.066	2.466	2.766
62	79.55	76.20	1.68	11.84	72.80
	31.32	3.000	.066	2.566	2.866
64	82.09	78.74	1.68	11.84	75.34
	32.32	3.100	.066	2.666	2.966
66	84.63	81.28	1.68	11.84	77.88
	33.32	3.200	.066	2.766	3.066
68	87.17	83.82	1.68	11.84	80.42
	34.32	3.300	.066	2.866	3.166
70	89.71	86.36	1.68	11.84	82.96
	35.32	3.400	.066	2.966	3.266
72	92.25	88.90	1.68	11.84	85.50
	36.32	3.500	.066	3.066	3.366

CORRECT PCB HOLE SIZE EC NO: UCP2010-0294 DRAWN BY: DR. W. S. BARBA CHKD BY: J. MORGAN APPROVED BY: J. BAKKUS	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN	SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± .005 ± .005 3 PLACES ± .013 ± .010 2 PLACES ± 0.25 ± .005 1 PLACE ± 0.25 ± .005 ANGULAR ± 1/2°	DRAWN BY: EIK CHECKED BY: EIK APPROVED BY: SMILLER	DATE: 1988/03/10 DATE: 1988/03/10 DATE: 2010/03/31	TITLE 4 SIDES SHROUDED HEADER HIGH TEMP, (2.54)/.100 GRID W/ (.064)/.025 PINS	MATERIAL NO. SDA-70567-****
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

OPTION B

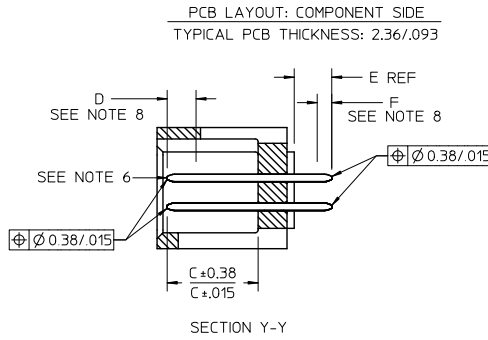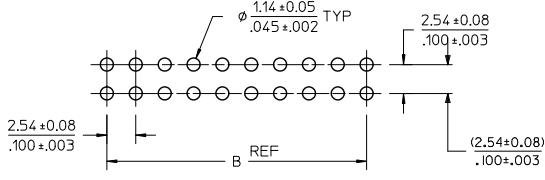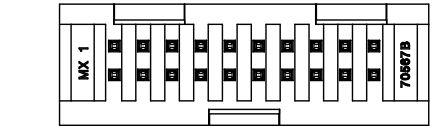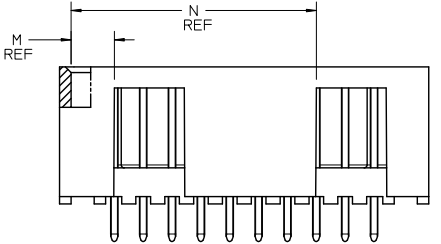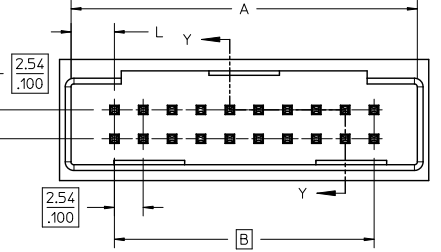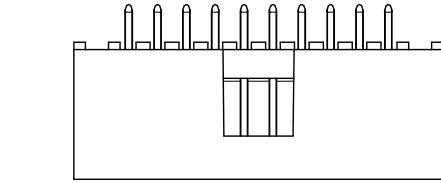

NOTES:

1. MATERIAL: SHROUDED WAFER: 30% G.F. LCP, COLOR: BLACK, 94V-0. PINS: COPPER ALLOY.
2. PLATING:
  - TIN - (0.00381)/.000150 MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL
  - 15 GOLD - (0.000381)/.000075 MINIMUM GOLD PLATE IN SELECTED AREA
  - (0.00191)/.000075 MINIMUM TIN IN SELECTED AREA, OVER NICKEL UNDERPLATE OVERALL
  - 30 GOLD - (0.00076)/.000030 MINIMUM GOLD PLATE IN SELECTED AREA
  - (0.00191)/.000075 MINIMUM TIN IN SELECTED AREA, OVER NICKEL UNDERPLATE OVERALL
3. PRODUCT SPECIFICATION: PS-70567.
4. PACKAGING: SEE CHARTS
5. PIN PUSHOUT FORCE: 4 LBS. MIN IN DIRECTION INDICATED.
6. FOR ILLUSTRATION PURPOSES, 20 (DUAL 10) CIRCUIT SIZE HEADER SHOWN.
7. PIN SOLDERABILITY PER MOLEX SPEC. SMES-152.
8. MEASURE POINT FOR PLATING THICKNESS.
9. WINDOW IS NOT AVAILABLE ON 6 CIRCUIT.
10. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
11. SEE SHEET 1 FOR ALL OTHER DIMENSIONS

REV	DESCRIPTION
1	CORRECT PCB HOLE SIZE
2	EC NO: UCP2011-0294
3	DRWNSIBARRA 2010/08/02
4	CHKCDMORGAN 1988/03/10
5	APPR:MBANKS 2010/08/03

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .005	± .0005
3 PLACES ± .013	± .010
2 PLACES ± .025	± .020
1 PLACE ± .050	± .040
ANGULAR ± 1/2°	

DIMENSION STYLE	
MM/IN	SCALE
DRAWN BY EIK	DATE 1988/03/10
CHECKED BY EIK	DATE 1988/03/10
APPROVED BY MILLER	DATE 2010/03/31

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
4:1	INCH	
4 SIDES SHROUDED HEADER HIGH TEMP, (2.54)/.100 GRID W/ (0.64)/.025 PINS		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE TABLE	SDA-70567-****	2 OF 5

CKT	DIM. A	DIM. B	DIM. L	DIM. M	DIM. N
06	12.70	5.08	3.81	3.81	—
08	15.24	6.62	3.81	3.81	—
10	17.78	10.16	3.81	6.35	—
12	20.32	12.70	3.81	6.35	—
14	22.86	15.24	3.81	8.89	—
16	25.40	17.78	3.81	8.89	—
18	27.94	20.32	3.81	11.43	—
20	30.48	22.86	3.81	3.81	21.59
22	33.02	25.40	3.81	3.81	24.13
24	35.56	27.94	3.81	3.81	26.67
26	38.10	30.48	3.81	3.81	29.21
28	40.64	33.02	3.81	3.81	31.75
30	43.18	35.56	3.81	3.81	34.29
32	45.72	38.10	3.81	3.81	36.83
34	48.26	40.64	3.81	3.81	39.37
36	50.80	43.18	3.81	3.81	41.91
38	53.34	45.72	3.81	3.81	44.45
40	55.88	48.26	3.81	3.81	46.99
42	58.42	50.80	3.81	3.81	49.53
44	60.96	53.34	3.81	3.81	52.07
46	63.50	55.88	3.81	3.81	54.61
48	66.04	58.42	3.81	3.81	57.15
50	68.58	60.96	3.81	3.81	59.69
52	71.12	63.50	3.81	3.81	62.23
54	73.66	66.04	3.81	3.81	64.77
56	76.20	68.58	3.81	3.81	67.31
58	78.74	71.12	3.81	3.81	69.85
60	81.28	73.66	3.81	3.81	72.39
62	83.82	76.20	3.81	3.81	74.93
64	86.36	78.74	3.81	3.81	77.47
66	88.90	81.28	3.81	3.81	80.01
68	91.44	83.82	3.81	3.81	82.55
70	93.98	86.36	3.81	3.81	85.09
72	96.52	88.90	3.81	3.81	87.63



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0015800187 - CONN HEADER 18POS VERT TIN T/H

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Table with columns for Engineering Number, Manufacture Release Status, E Ref., C Ref., Connector End Plating, P.C. Board End Plating, and Packaging Information. Rows include part numbers like -0001/-0034, -0035/-0068, etc.

Table with columns for No. of Ckts, Option 'A', and No. of Ckts. It lists various options and their corresponding pin counts, such as 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72.

Technical drawing information block including: SEE SHEETS 1 & 2, GENERAL TOLERANCES (UNLESS SPECIFIED), DIMENSION STYLE MM/IN, SCALE 1:1, DESIGN UNITS INCH, THIRD ANGLE PROJECTION, DRAWN BY, CHECKED BY, APPROVED BY, MATERIAL, SIZE, and SHEET NO. 3 OF 5.

ENGINEERING NUMBER A-70567	MANUFACTURE RELEASE STATUS	E REF.	C .015 ± (0.38)	CONNECTOR END PLATING		P.C. BOARD END PLATING		PACKAGING INFORMATION PK-70873-
				TYPE	D MEAS.	TYPE	F MEAS.	
-0205/-0238	R.F.M.	.130 (3.30)	.315 (8.00)	TIN	.100 (2.54)	TIN	.050 (1.27)	0018
-0239/-0272	R.F.M.	.200 (5.08)	.315 (8.00)	TIN	.100 (2.54)	TIN	.050 (1.27)	0018
-0273/-0306	R.F.M.	.130 (3.30)	.315 (8.00)	15 GOLD	.100 (2.54)	TIN	.050 (1.27)	0018
-0307/-0340	R.F.M.	.200 (5.08)	.315 (8.00)	15 GOLD	.100 (2.54)	TIN	.050 (1.27)	0018
-0341/-0374	R.F.M.	.130 (3.30)	.315 (8.00)	30 GOLD	.100 (2.54)	TIN	.050 (1.27)	0018
-0375/-0408	R.F.M.	.200 (5.08)	.315 (8.00)	30 GOLD	.100 (2.54)	TIN	.050 (1.27)	0018


NO. OF CKTS	OPTION "B"	OPTION "B"	OPTION "B"	OPTION "B"	OPTION "B"	OPTION "B"	NO. OF CKTS
06	IS-80-0067 A-70567-0205	70567-0239 A-70567-0239	IS-80-0069 A-70567-0273	70567-0307 A-70567-0307	IS-80-1061 A-70567-0341	70567-0375 A-70567-0375	06
08	IS-80-0087 A-70567-0206	70567-0240 A-70567-0240	IS-80-0089 A-70567-0274	70567-0308 A-70567-0308	IS-80-1081 A-70567-0342	70567-0376 A-70567-0376	08
10	IS-80-0107 A-70567-0207	70567-0241 A-70567-0241	IS-80-0109 A-70567-0275	70567-0309 A-70567-0309	IS-80-1101 A-70567-0343	70567-0377 A-70567-0377	10
12	IS-80-0127 A-70567-0208	70567-0242 A-70567-0242	IS-80-0129 A-70567-0276	70567-0310 A-70567-0310	IS-80-1121 A-70567-0344	70567-0378 A-70567-0378	12
14	IS-80-0147 A-70567-0209	70567-0243 A-70567-0243	IS-80-0149 A-70567-0277	70567-0311 A-70567-0311	IS-80-1141 A-70567-0345	70567-0379 A-70567-0379	14
16	IS-80-0167 A-70567-0210	70567-0244 A-70567-0244	IS-80-0169 A-70567-0278	70567-0312 A-70567-0312	IS-80-1161 A-70567-0346	70567-0380 A-70567-0380	16
18	IS-80-0187 A-70567-0211	70567-0245 A-70567-0245	IS-80-0189 A-70567-0279	70567-0313 A-70567-0313	IS-80-1181 A-70567-0347	70567-0381 A-70567-0381	18
20	IS-80-0207 A-70567-0212	70567-0246 A-70567-0246	IS-80-0209 A-70567-0280	70567-0314 A-70567-0314	IS-80-1201 A-70567-0348	70567-0382 A-70567-0382	20
22	IS-80-0227 A-70567-0213	70567-0247 A-70567-0247	IS-80-0229 A-70567-0281	70567-0315 A-70567-0315	IS-80-1221 A-70567-0349	70567-0383 A-70567-0383	22
24	IS-80-0247 A-70567-0214	70567-0248 A-70567-0248	IS-80-0249 A-70567-0282	70567-0316 A-70567-0316	IS-80-1241 A-70567-0350	70567-0384 A-70567-0384	24
26	IS-80-0267 A-70567-0215	70567-0249 A-70567-0249	IS-80-0269 A-70567-0283	70567-0317 A-70567-0317	IS-80-1261 A-70567-0351	70567-0385 A-70567-0385	26
28	IS-80-0287 A-70567-0216	70567-0250 A-70567-0250	IS-80-0289 A-70567-0284	70567-0318 A-70567-0318	IS-80-1281 A-70567-0352	70567-0386 A-70567-0386	28
30	IS-80-0307 A-70567-0217	70567-0251 A-70567-0251	IS-80-0309 A-70567-0285	70567-0319 A-70567-0319	IS-80-1301 A-70567-0353	70567-0387 A-70567-0387	30
32	IS-80-0327 A-70567-0218	70567-0252 A-70567-0252	IS-80-0329 A-70567-0286	70567-0320 A-70567-0320	IS-80-1321 A-70567-0354	70567-0388 A-70567-0388	32
34	IS-80-0347 A-70567-0219	70567-0253 A-70567-0253	IS-80-0349 A-70567-0287	70567-0321 A-70567-0321	IS-80-1341 A-70567-0355	70567-0389 A-70567-0389	34
36	IS-80-0367 A-70567-0220	70567-0254 A-70567-0254	IS-80-0369 A-70567-0288	70567-0322 A-70567-0322	IS-80-1361 A-70567-0356	70567-0390 A-70567-0390	36
38	IS-80-0387 A-70567-0221	70567-0255 A-70567-0255	IS-80-0389 A-70567-0289	70567-0323 A-70567-0323	IS-80-1381 A-70567-0357	70567-0391 A-70567-0391	38
40	IS-80-0407 A-70567-0222	70567-0256 A-70567-0256	IS-80-0409 A-70567-0290	70567-0324 A-70567-0324	IS-80-1401 A-70567-0358	70567-0392 A-70567-0392	40
42	IS-80-0427 A-70567-0223	70567-0257 A-70567-0257	IS-80-0429 A-70567-0291	70567-0325 A-70567-0325	IS-80-1421 A-70567-0359	70567-0393 A-70567-0393	42
44	IS-80-0447 A-70567-0224	70567-0258 A-70567-0258	IS-80-0449 A-70567-0292	70567-0326 A-70567-0326	IS-80-1441 A-70567-0360	70567-0394 A-70567-0394	44
46	IS-80-0467 A-70567-0225	70567-0259 A-70567-0259	IS-80-0469 A-70567-0293	70567-0327 A-70567-0327	IS-80-1461 A-70567-0361	70567-0395 A-70567-0395	46
48	IS-80-0487 A-70567-0226	70567-0260 A-70567-0260	IS-80-0489 A-70567-0294	70567-0328 A-70567-0328	IS-80-1481 A-70567-0362	70567-0396 A-70567-0396	48
50	IS-80-0507 A-70567-0227	70567-0261 A-70567-0261	IS-80-0509 A-70567-0295	70567-0329 A-70567-0329	IS-80-1501 A-70567-0363	70567-0397 A-70567-0397	50
52	IS-80-0527 A-70567-0228	70567-0262 A-70567-0262	IS-80-0529 A-70567-0296	70567-0330 A-70567-0330	IS-80-1521 A-70567-0364	70567-0398 A-70567-0398	52
54	IS-80-0547 A-70567-0229	70567-0263 A-70567-0263	IS-80-0549 A-70567-0297	70567-0331 A-70567-0331	IS-80-1541 A-70567-0365	70567-0399 A-70567-0399	54
56	IS-80-0567 A-70567-0230	70567-0264 A-70567-0264	IS-80-0569 A-70567-0298	70567-0332 A-70567-0332	IS-80-1561 A-70567-0366	70567-0400 A-70567-0400	56
58	IS-80-0587 A-70567-0231	70567-0265 A-70567-0265	IS-80-0589 A-70567-0299	70567-0333 A-70567-0333	IS-80-1581 A-70567-0367	70567-0401 A-70567-0401	58
60	IS-80-0607 A-70567-0232	70567-0266 A-70567-0266	IS-80-0609 A-70567-0300	70567-0334 A-70567-0334	IS-80-1601 A-70567-0368	70567-0402 A-70567-0402	60
62	IS-80-0627 A-70567-0233	70567-0267 A-70567-0267	IS-80-0629 A-70567-0301	70567-0335 A-70567-0335	IS-80-1621 A-70567-0369	70567-0403 A-70567-0403	62
64	IS-80-0647 A-70567-0234	70567-0268 A-70567-0268	IS-80-0649 A-70567-0302	70567-0336 A-70567-0336	IS-80-1641 A-70567-0370	70567-0404 A-70567-0404	64
66	IS-80-0667 A-70567-0235	70567-0269 A-70567-0269	IS-80-0669 A-70567-0303	70567-0337 A-70567-0337	IS-80-1661 A-70567-0371	70567-0405 A-70567-0405	66
68	IS-80-0687 A-70567-0236	70567-0270 A-70567-0270	IS-80-0689 A-70567-0304	70567-0338 A-70567-0338	IS-80-1681 A-70567-0372	70567-0406 A-70567-0406	68
70	IS-80-0707 A-70567-0237	70567-0271 A-70567-0271	IS-80-0709 A-70567-0305	70567-0339 A-70567-0339	IS-80-1701 A-70567-0373	70567-0407 A-70567-0407	70
72	IS-80-0727 A-70567-0238	70567-0272 A-70567-0272	IS-80-0729 A-70567-0306	70567-0340 A-70567-0340	IS-80-1721 A-70567-0374	70567-0408 A-70567-0408	72

SEE SHEETS 1 & 2 REC. NO. 147201-024 DRAWN BY BARBARA ZOU/08/02 CHECKED BY CHEN/DIMAS/18/08/02 APPROVED BY J DATE 18/08/02	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED) DIMENSIONS IN MM AND INCH 4 PLACES ±.005 3 PLACES ±.005 2 PLACES ±.010 1 PLACE ±.025 ANGULAR ±1/2°	DIMENSION STYLE MM/IN SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION	DRAWN BY DATE TITLE EIK 1988/03/10 4 SIDES SHROUDED HEADER CHECKED BY DATE EIK 1988/03/10 HIGH TEMP (2.54)/100 APPROVED BY DATE MILLER 2010/03/31 GRID W/ (0.64)/0.025 PINS MATERIAL NO. MOLEX INCORPORATED SEE TABLE DOCUMENT NO. SDA-70567-**** THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SHEET NO. 4 OF 5
---	--------------------------------------	--	--	---	------------------

# SPECIAL - WITH VOIDS

CKTS SIZE	ENGINEERING NUMBER A-70567	EDP NUMBER 70567-9003	E REF. .130 (3.30)	C $\pm .015$ (0.38)	K $\pm .015$ (0.38)	VOID CKTS 10	CONNECTOR END PLATING			P.C. BOARD END PLATING			PACKAGING INFORMATION PK-70873-
							TYPE		D MEAS. .100 (2.54)	TYPE		F MEAS. .050 (.127)	
10	-9003	70567-9003	.130 (3.30)	$\pm .015$ (0.38)	$\pm .015$ (0.38)	10	GOLD		.100 (2.54)	TIN		.050 (.127)	0018

**CIRCUIT NUMBERING CONVENTION**  
(10 CKT USED AS EXAMPLE)

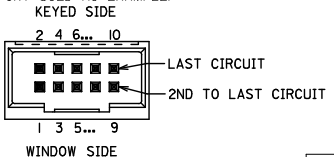

SEE SHEETS 1 & 2 EC NO: UCP201-0294 DRAWN BY: BARBARA 2010/08/02 CHKD BY: JORGAN 1988/03/10 APPR: BAWKITS 2010/08/03	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	MM/IN	4:1	INCH		
DESCRIPTION	▽=0	4 PLACES ± ---	± ---	DRAWN BY	DATE	TITLE 4 SIDES SHROUDED HEADER HIGH TEMP, (2.54)/.100 GRID W/ (0.64)/.025 PINS MOLEX INCORPORATED		
	▽=0	3 PLACES ± ---	± .005	CHECKED BY	DATE			
	▽=0	2 PLACES ± 0.13	± .010	APPROVED BY	DATE			
		1 PLACE ± 0.25	± ---	SMILLER	2010/03/31	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SDA-70567-****		5 OF 5		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								