

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Standex-Meder Electronics](#)
[KSK-1A66/3-1015](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

Series Datasheet – KSK-1A66/3 Reed Switches

www.standexmeder.com

KSK-1A66/3

Reed Switches

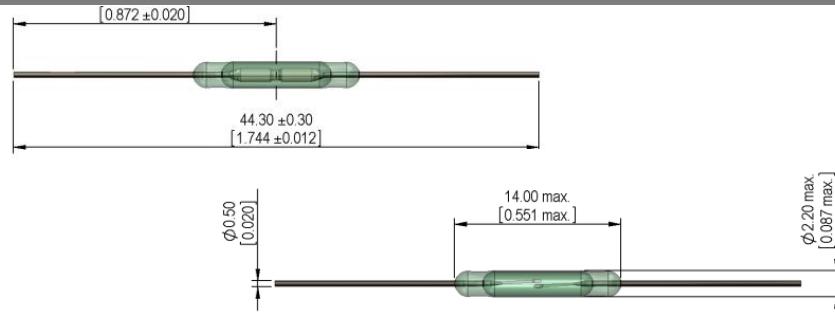

- Features: Miniature, Automotive-approved
- Applications: Fluid Sensor, Lid Detector, Flow Sensor & Others
- Markets: Automotive, White Goods, HVAC & Others

Part Description: K S K - 1 A 6 6 / 3 X X X X

Contact QTY	Contact Form	Switch Model	Pull-In Excitation (AT-Range)
1	A (SPST-NO)	66/3	10 - 30

Contact Data	Unit
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	W
Switching Voltage (max.) DC or peak AC	V
Switching Current (max.) DC or peak AC	A
Carry Current (max.) DC or peak AC	A
Contact Resistance (max.) @ 0.5V & 10mA	mOhm
Breakdown Voltage (min.) DC or peak AC	V
Operating Time (max.) Incl. Bounce; Measured with 40% Overdrive	ms
Release Time (max.) Measured with no Coil Excitation	ms
Test Coil	KMS-01
Insulation Resistance (min.) RH < 45%, 100 V Test Voltage	GOhm
Capacitance (typ.) @ 10kHz across open Switch	pF

Series Datasheet – KSK-1A66/3 Reed Switches

www.standexmeder.com

Dimensions (mm)		
Overall Length (max.)	44.3	
Glass Length (max.)	14.0	
Glass Dia (max.)	2.2	
Lead Dia. (max.)	0.5	

Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 130	°C
Storage Temperature	-55 to 130	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

KSK-1A66/3




Handling & Assembly Instructions

- Use proper lead clamping or heat sinking techniques to prevent mechanical and/or heat stress to the glass seal during bending, cutting, soldering, and welding
- Mechanical shock as the result of dropping the reed switch typically from a distance of greater than 12" may change it's magnetic sensitivity and/or destroy the switch
- Any form of modification to the switch leads will alter it's magnetic sensitivity
- Series resistor recommended for >5m cable length

Life Test Data

*Load increase reduces life expectancy of Reed Switches

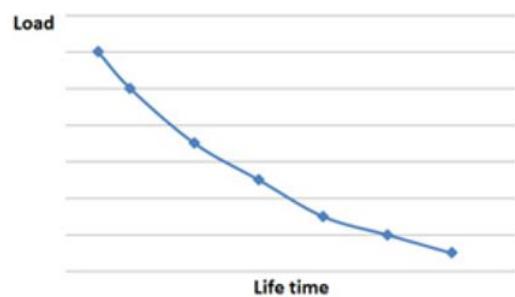

Glossary

Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	  
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	

