

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[22-28-8135](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

NO. CKTS	DIM. A	DIM. B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72
20	50.80	48.26
21	53.34	50.80
22	55.88	53.34
23	58.42	55.88
24	60.96	58.42
25	63.50	60.96
26	66.04	63.50
27	68.58	66.04
28	71.12	68.58
29	73.66	71.12
30	76.20	73.66
31	78.74	76.20
32	81.28	78.74
33	83.82	81.28
34	86.36	83.82
35	88.90	86.36
36	91.44	88.90
37	93.98	91.44
38	96.52	93.98
39	99.06	96.52
40	101.60	99.06
41	104.14	101.60
42	106.68	104.14
43	109.22	106.68
44	111.76	109.22
45	114.30	111.76
46	116.84	114.30
47	119.38	116.84
48	121.92	119.38
49	124.46	121.92
50	127.00	124.46
51	129.54	127.00
52	132.08	129.54
53	134.62	132.08
54	137.16	134.62
55	139.70	137.16
56	142.24	139.70
57	144.78	142.24
58	147.32	144.78
59	149.86	147.32
60	152.40	149.86
61	154.94	152.40
62	157.48	154.94
63	160.02	157.48
64	162.56	160.02
65	165.10	162.56
66	167.64	165.10
67	170.18	167.64
68	172.72	170.18
69	175.26	172.72
70	177.80	175.26
71	180.34	177.80
72	182.88	180.34
73	185.42	182.88
74	187.96	185.42
75	190.50	187.96
76	193.04	190.50
77	195.58	193.04
78	198.12	195.58
79	200.66	198.12
80	203.20	200.66
81	205.74	203.20
82	208.28	205.74
83	210.82	208.28
84	213.36	210.82
85	215.90	213.36
86	218.44	215.90
87	220.98	218.44
88	223.52	220.98
89	226.06	223.52
90	228.60	226.06
91	231.14	228.60
92	233.68	231.14
93	236.22	233.68
94	238.76	236.22
95	241.30	238.76
96	243.84	241.30
97	246.38	243.84
98	248.92	246.38
99	251.46	248.92
100	254.00	251.46



- NOTES:
- MATERIAL: GLASS FILLED NYLON
UL94V-0. COLOR: BLACK
 - FINISH:
(154) OVERALL TIN: 0.00254/0.00100 MIN. OVER
NICKEL: 0.00127/0.00050 MIN.
(208) SELECT GOLD: 0.00038/0.00015 MIN.
SELECT TIN: 0.00254/0.00100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/0.00050 MIN.
(228) SELECT GOLD: 0.00076/0.00030 MIN.
SELECT TIN: 0.00254/0.00100 MIN.
WITH OVERALL NICKEL UNDERPLATE: 0.00127/0.00050 MIN.
 - PRODUCT SPECIFICATION: PS 10-07
 - PACKAGING INFORMATION: SEE TABLES
 - SOLDERABILITY PER SMES-152.
 - PIN PUSH OUT FORCE: 3 LBS. MIN
 - KINK PIN OPTION NOT RECOMMENDED FOR 2 CIRCUIT PARTS.
HOLE SIZE MAY NEED TO BE ADJUSTED FOR 2 CIRCUIT PARTS
WITH KINK OPTION FOR PROPER INSERTION INTO THE PCB.
SEE SMES-42003 FOR ADDITIONAL INFORMATION
ON KINK PIN DIRECTION AND PLACEMENT.
 - HEADERS ARE NOT STACKABLE ON 254/100 CENTERS.
 - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF
COSMETIC SPECIFICATION PS-45499-002.
 - PIN TIP DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.
DIMENSIONS APPLY PRIOR TO PLATING OR ASSEMBLY.

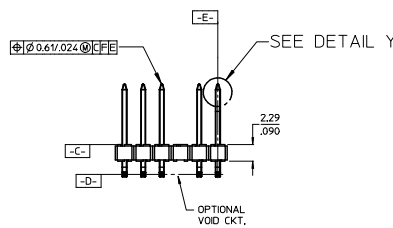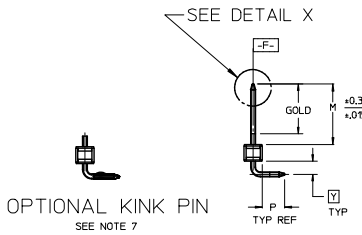

CORRECT DIMENSION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
LEC NO.	DATE	DESCRIPTION	REV	mm	INCH	MM/IN	DATE	2:1	INCH	INCH	INCH	DATE	DATE
2015-1410	2014/10/20	DRW:KMP		4 PLACES	± 0.10	± 0.010	JSCHAFER	11/24/03					
2015-1410	2014/10/20	CHK:KMP		3 PLACES	± 0.10	± 0.010	CHECKED BY	DATE					
2015-1410	2014/10/20	APP:SMITH		2 PLACES	± 0.25	± 0.015	SAMIEC	11/24/03					
				1 PLACE	± 0.38	± 0.015	APPROVED BY	DATE					
				0 PLACE	± 0.38	± 0.015	MARGULIS	11/24/03					
CORRECT DIMENSION				ANGULAR ± 1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		1 OF *	
X4				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-42377-001		1 OF *			
						SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					