



Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Visual Communications Company, LLC](#)
[CM1982SP](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

T-3 Double Slide Base Halogen Lamps Configuration

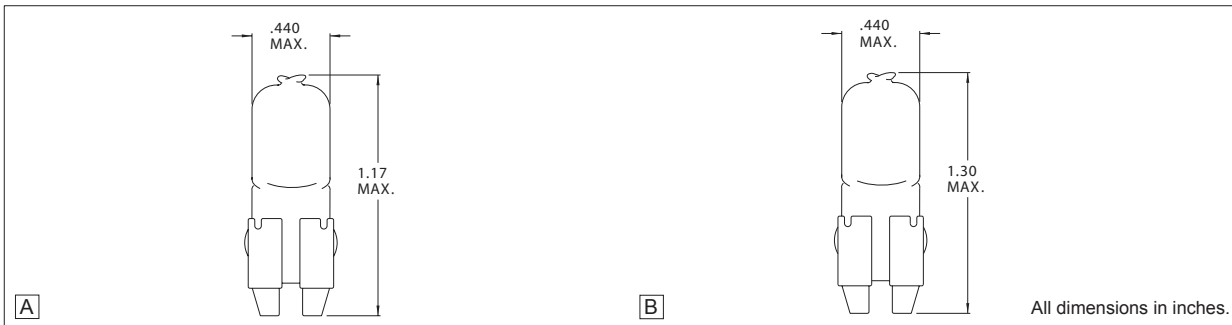

Part No.	Volts	Watts	Filament Shape	Nominal MSCP	Laboratory Life Hours	Configuration	Comments
CM1968	28.0	25	C-2V	15	500	A	Quartz Glass
CM1975	12.8	25	C-6	25	500	A	Quartz Glass
CM1976	13.0	75	C-6	115	400	B	Quartz Glass
CM1977	8.5	62	C-6	110	50	A	Quartz Glass

T-3 Single Contact Bayonet Base Halogen Lamps Configuration

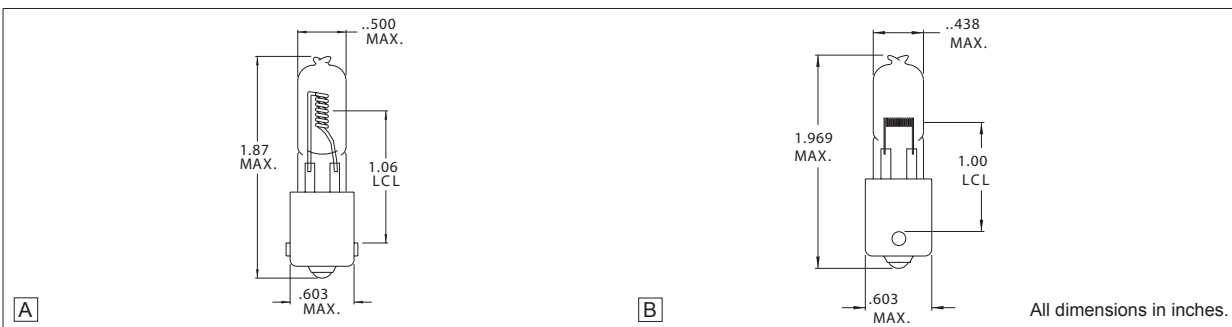

Part No.	Volts	Watts	Filament Shape	Nominal MSCP	Laboratory Life Hours	Configuration	Comments
CM1982	28.0	75	CC-8I	110	1000	A	Quartz Glass
CM1982SP	28.0	75	CC-6	107	2000	B	Quartz Glass

Caution:

These halogen cycle lamps may shatter if scratched or damaged. Use these lamps in fixtures designed for their high operating temperature. Always turn power off when changing these lamps. For satisfactory performance limit the seal and wire lead temperature to 350°C to avoid deterioration. Maintain a minimum lamp wall temperature of 250°C to assure the halogen cycle occurs. Remove all grease and fingerprints from these lamps before operation. Never exceed the design voltage of these lamps.