

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0026603077](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

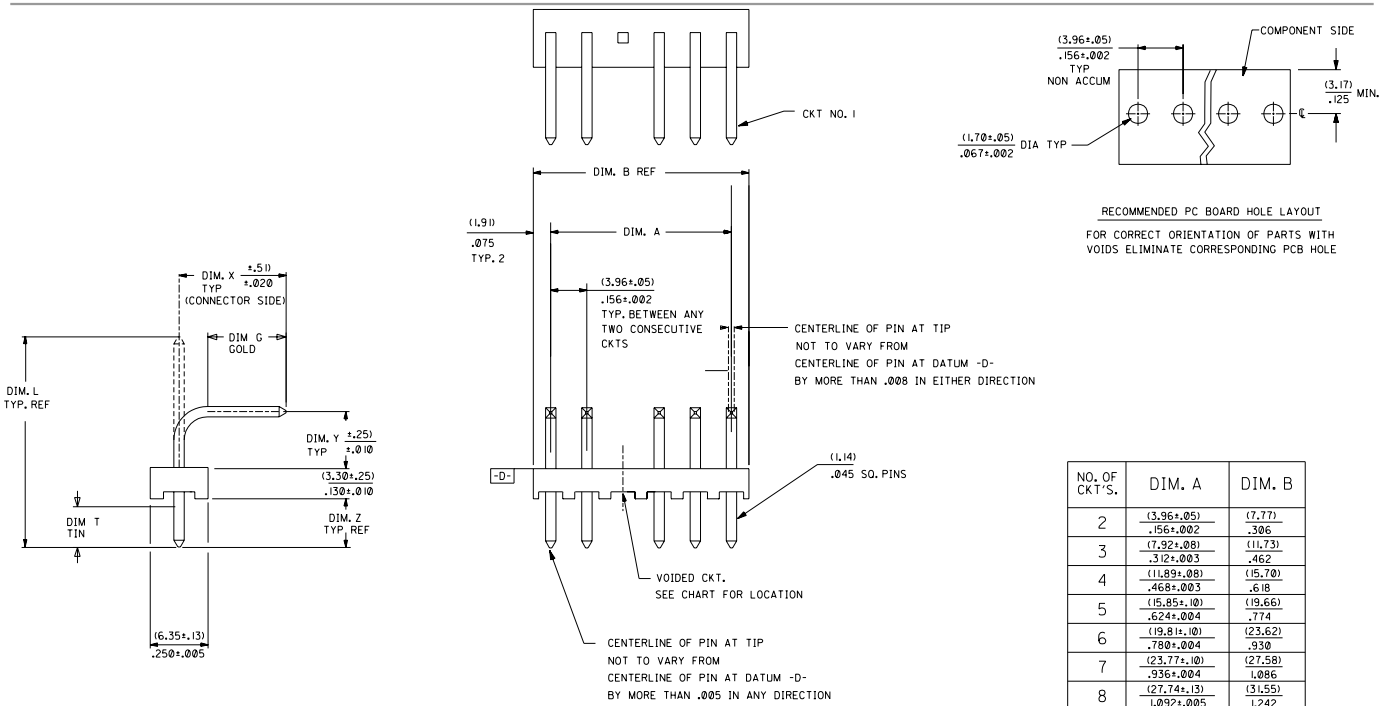

NO. OF CKT'S.	DIM. A	DIM. B
2	(3.96+.05) / .156+.002	(7.77) / .306
3	(7.92+.08) / .312+.003	(11.73) / .462
4	(11.89+.08) / .468+.003	(15.70) / .618
5	(15.85+.10) / .624+.004	(19.66) / .774
6	(19.81+.10) / .780+.004	(23.62) / .930
7	(23.77+.10) / .936+.004	(27.58) / 1.086
8	(27.74+.13) / 1.092+.005	(31.55) / 1.242
9	(31.70+.13) / 1.248+.005	(35.51) / 1.398
10	(35.66+.13) / 1.404+.005	(39.47) / 1.554
11	(39.62+.15) / 1.560+.006	(43.43) / 1.710
12	(43.59+.15) / 1.716+.006	(47.40) / 1.866
13	(47.55+.15) / 1.872+.006	(51.36) / 2.022
14	(51.51+.18) / 2.028+.007	(55.32) / 2.178
15	(55.47+.18) / 2.184+.007	(59.28) / 2.334
16	(59.44+.18) / 2.340+.007	(63.25) / 2.490
17	(63.40+.20) / 2.496+.008	(67.21) / 2.646
18	(67.36+.20) / 2.652+.008	(71.17) / 2.802

NOTES:

- PRECEDING ENG. NO. IN CHART DESIGNATES STANDARD PRODUCT.
- SOLDERABILITY: WHEN PARTS ARE SOLDERED AT A TEMPERATURE OF 230°C (446°F) FOR 5 SECONDS, EACH SOLDERED SURFACE SHALL BE A MINIMUM OF 95% COVERED WITH A SMOOTH CONTINUOUS ADHERENT COATING, FOR OTHER INFORMATION SEE ES-152.
- PIN PUSH OUT FORCE: PRIOR TO SOLDERING, A 3 POUND MINIMUM FORCE (IN EITHER DIRECTION) SHALL BE REQUIRED TO PUSH THE PIN OUT OF THE HEADER.
- FOR ADDITIONAL INFORMATION AND TESTING PROCEDURES SEE PS-08-50.
- PARTS ARE STACKABLE END TO END ON (3.96)/.156 CENTERS.
- FOR PART WITH PEG SEE DWG. NO. SDA-42472

MATERIAL: HEADER: GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
PIN: BRASS

PLATING:
(102) ELECTRO TIN .000450/.000200 OVER .000200/.000100 COPPER
(567) SELECT GOLD 15 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL
(569) SELECT GOLD 30 M.I. MIN SELECT TIN/LEAD 100 M.I. MIN OVER NICKEL OVERALL
FOR ADDITIONAL INFORMATION SE SDES-88.

LTR.	REVISIONS	LTR.	REVISIONS

REL	DATE	BY	CHK'D BY	APP'D.
0588/0604	03/11/02	SAMIEC		
REV TO WM SPEC	7/25/01	SAMIEC		
REL 0574/0587	9-19-00	SAMIEC		

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES UNLESS NOTED	DWG. NO.	REV.	DATE
	SD A-41772		

NO.	PLACES	INCH	METRIC
1	PLACES		
2	PLACES		
3	PLACES		

FILE NAME	SCALE	DRG.	DATE
S41772X1			



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0026603077 - KK 156 HDR ASSY RTAN TIN 7POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Table with columns: ENG. NO., HEADER NO., PIN NO., PLATING, DIM. L, DIM. X, DIM. G GOLD, DIM. Y, DIM. Z, DIM. T TIN, DIM. W, NO. OF CKTS, VOID CKTS, PACKAGING. Rows include part numbers like A-41772-0206/0222 and A-41772-0291/0307.

ON ASSEMBLIES A-41772-0291 / 0324 THE PIN BEND RADIUS IS TO BE .045 R

Summary table with columns: A-41772-0206/0222, A-41772-0291/0307, A-41772-0308/0324, A-41772-0325/0340, A-41772-0341/0352, A-41772-0353/0367. Each column contains sub-tables for EDP NO. and ENG. NO.

Main assembly table with columns: EDP NO., ENG. NO., NO. OF CKTS. Rows list various part numbers and their corresponding counts.

Technical drawing area containing a cross-section of a pin, dimensions in inches and metric, and a revision table with columns for revision number and description.