

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[JN314-412-C](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

WIRE COMBINATION CHART

WIRE SIZE	NO. OF WIRES	NUMBER OF ADDITIONAL WIRES OF ONE SIZE			
		#16	#14	#12	#10
#16	1	3-6	2-4	2-3	1 OR 2
	2	2-5	1-3	1 OR 2	1 OR 2
	3	1-4	1 OR 2	1 OR 2	1
	4	1-3	1	1	1
	5	1 OR 2	1	1	1
	6	1	0	0	0
#14	1	2-5	2-5	2-3	1 OR 2
	2	1-3	1-4	1 OR 2	1
	3	1 OR 2	1-3	1 OR 2	0
	4	1 OR 2	1 OR 2	1	0
	5	1	1	0	0
#12	1	2-5	2-4	1-3	1
	2	1-3	1-3	1 OR 2	1
	3	1	1	1	0
#10	1	1-5	1 OR 2	1 OR 2	1
	2	1 OR 2	1	0	0
#8	1	1-3	2	1	1

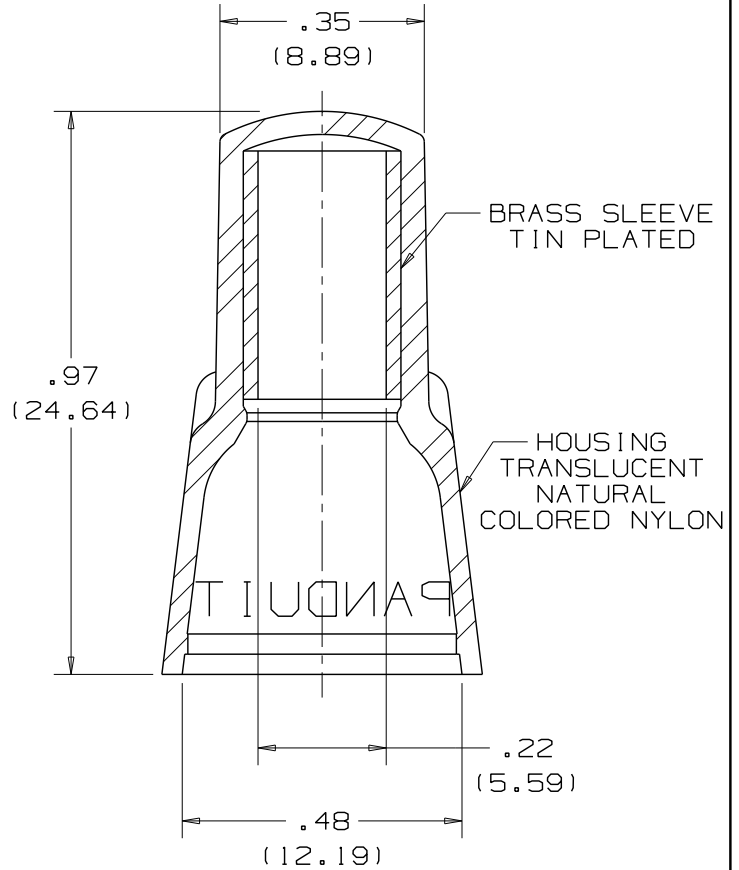

NOTES :

- PERFORMANCE RATED FOR :
 - A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #16 AWG-#8 AWG, SOLID OR STRANDED COPPER WIRE
- MATERIAL:
 - A. SLEEVE - BRASS, TIN PLATED
 - B. HOUSING - NATURAL NYLON
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- INSTALLATION TOOLS: CT-100, CT-100A, CT-160, CT-260
- WIRE STRIP LENGTH: $5/8^{+1/32}_{-0}$ (15.9^{+0.8}₋₀)
- SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

PANDUIT CORP.		TINLEY PARK, ILLINOIS	
NYLON INSULATED WIRE JOINT JN314-412			
DRWN BY	CHK'D	SCALE	DRWING NO.
GRM		NONE	A41003

07	8/11	SHOR	ADDED NOTE #6, ADDED INSTALLATION TOOLS
05	7/10	SRB	Added #8 wire size to Wire Combination Chart
REV	DATE	BY	DESCRIPTION