

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:




[Harting](#)

[09251306572](#)

For any questions, you can email us directly:



[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Alle Rechte vorbehalten. All rights reserved.

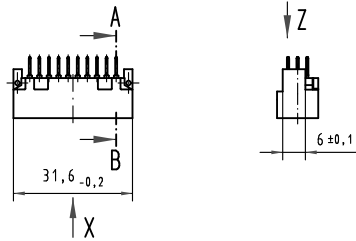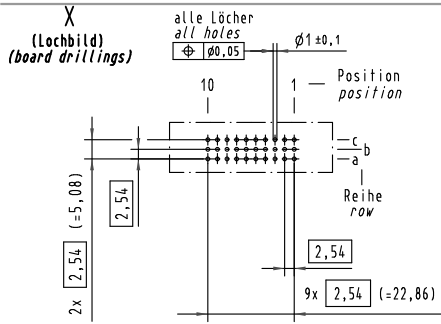

**Z**  
10:1

Querschnitt der Lötanschlüsse:  
cross-section of solder terminations:

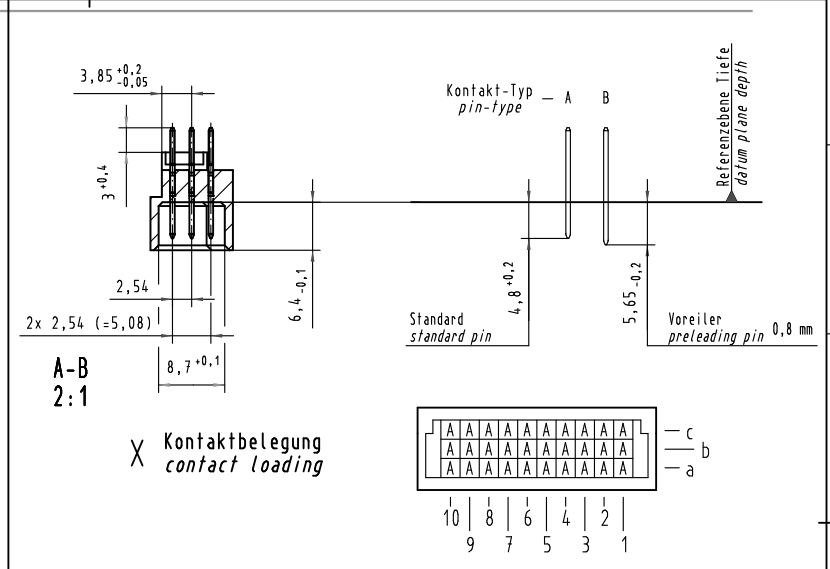

09 25 130 6572	2	Au flash over PdNi over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maß/Free size tolerances IEC 60603-2	
Detail:	05.05.09 HR	Verstärkung/Scale	1:1	Bauform 3C Messerleiste ohne Flansch Einlötl, 30 pol. type 3C male connector without flange solder, 30 pol.	
Insp.:	05.05.09 RA		2:1		
Stand.:			10:1		
35605	HARTING Electronics GmbH & Co. KG		TB 09 25 130 x572		Blatt/page
Mod.:	Dat.:	Name:	Sub.:		