


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09644007210](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

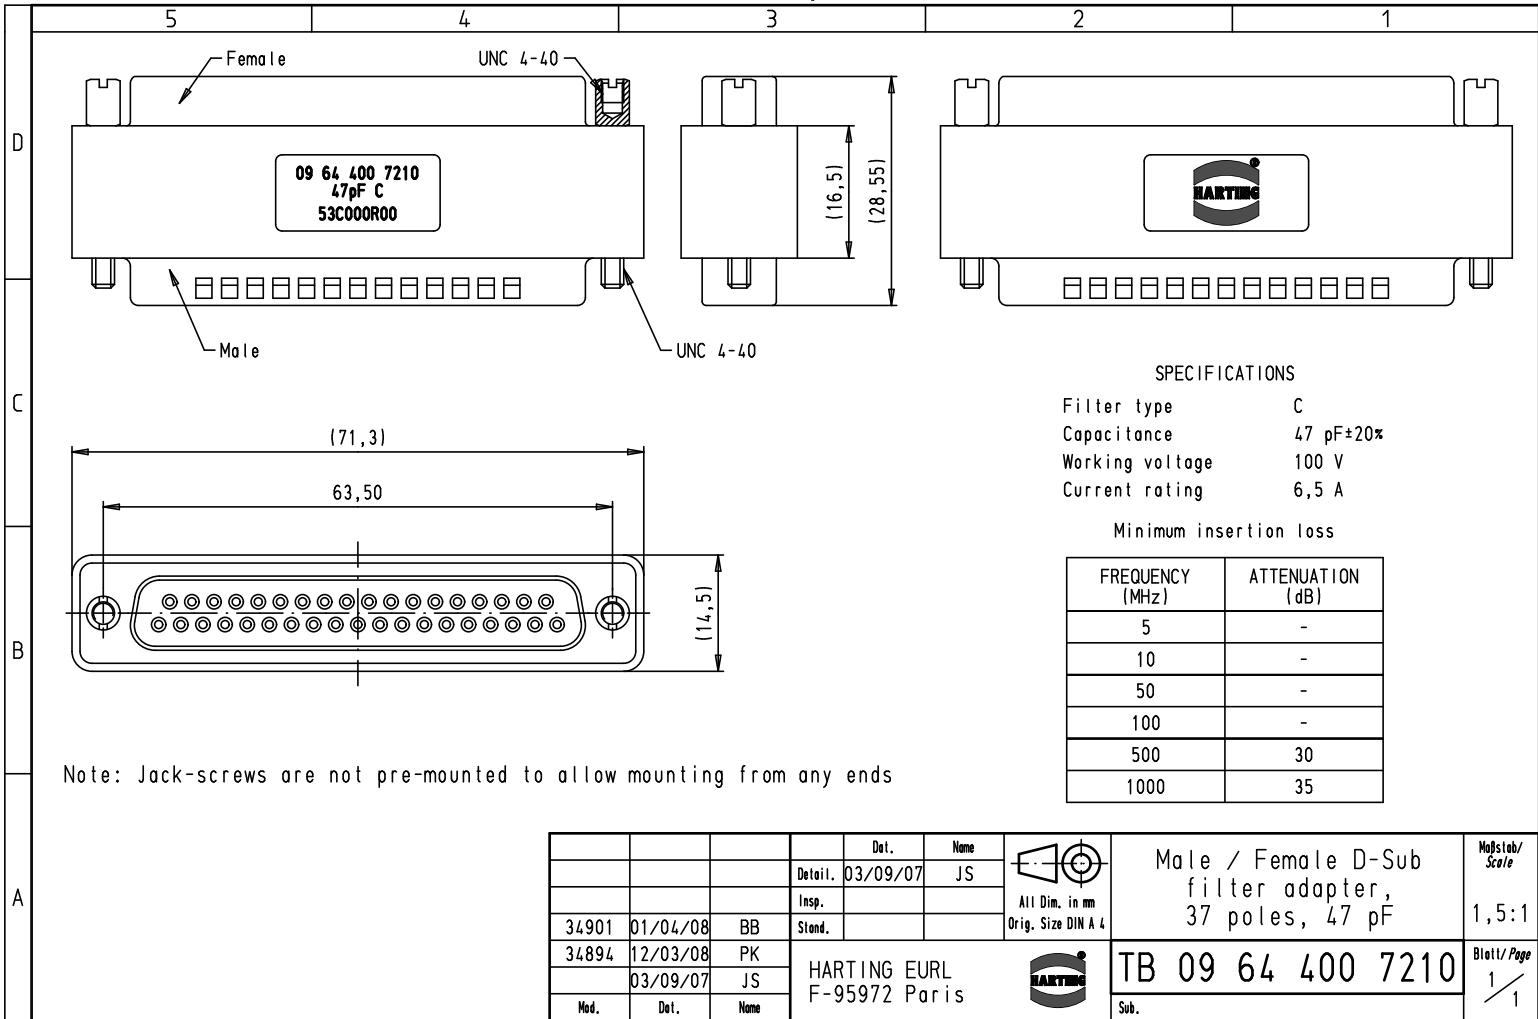



SPECIFICATIONS

Filter type	C
Capacitance	47 pF±20%
Working voltage	100 V
Current rating	6,5 A

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30
1000	35

Note: Jack-screws are not pre-mounted to allow mounting from any ends

				Det.	Name	 All Dim. in mm Orig. Size DIN A 4	Male / Female D-Sub filter adapter, 37 poles, 47 pF	Maßstab/ Scale 1,5:1
				Detail.	03/09/07			
34901	01/04/08	BB	Stand.				TB 09 64 400 7210	Blatt / Page 1 / 1
34894	12/03/08	PK						
	03/09/07	JS						
Mod.	Det.	Name	HARTING EURL F-95972 Paris				Sub.	