


## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)  
[09644007220](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

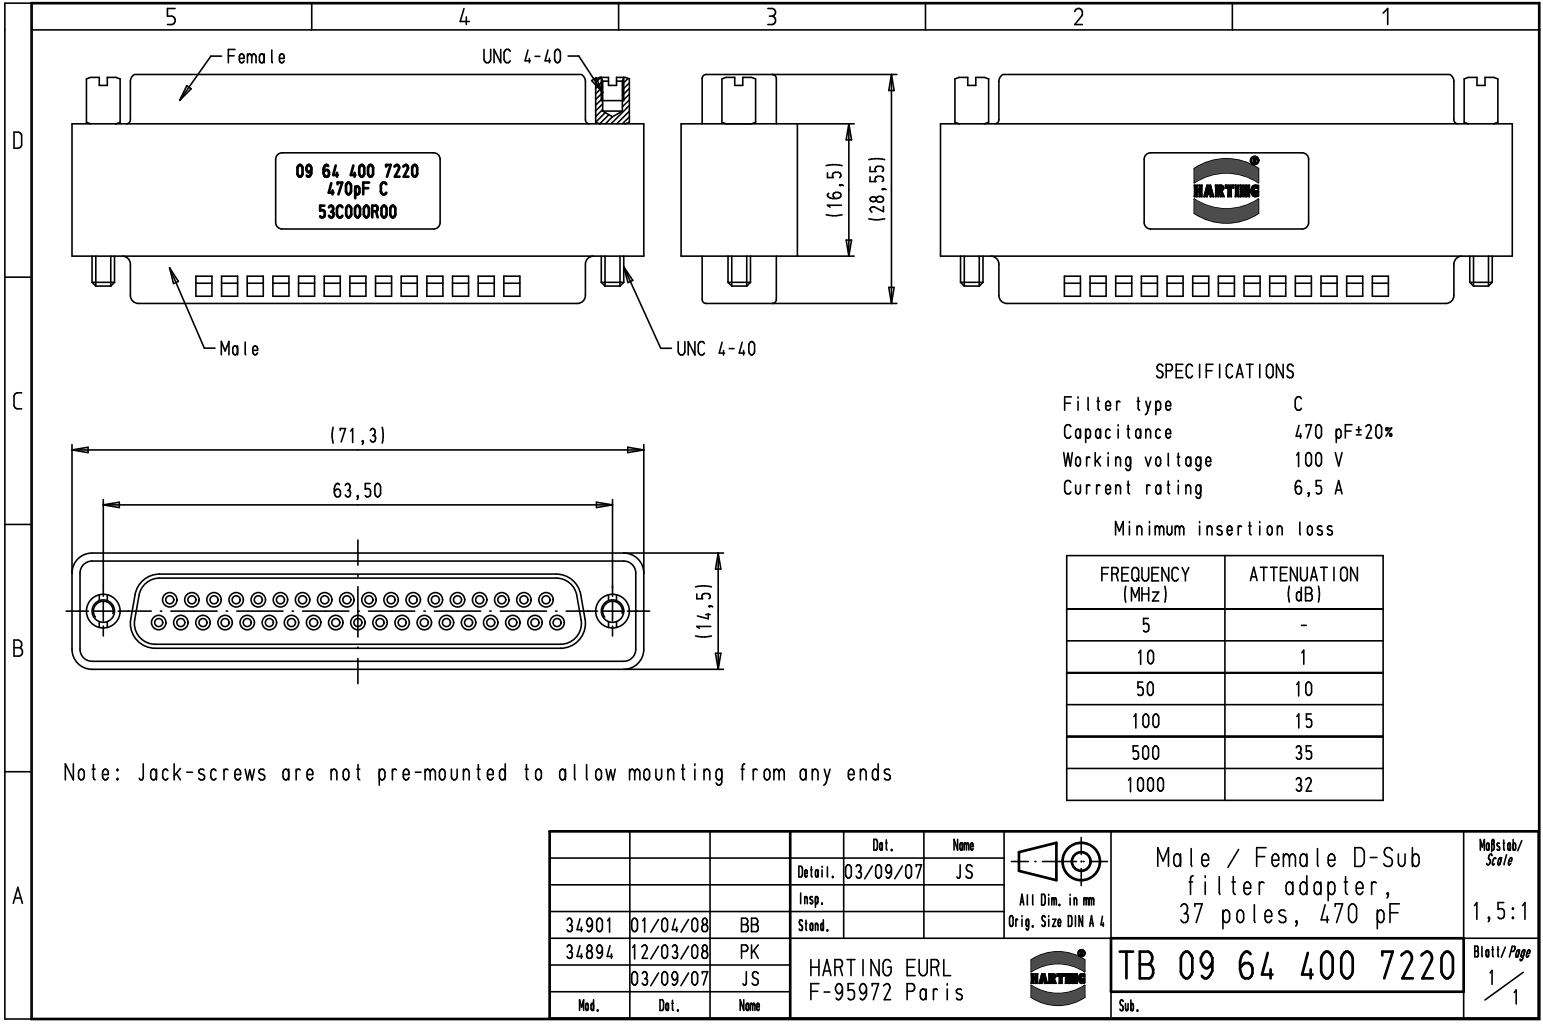

**SPECIFICATIONS**

Filter type	C
Capacitance	470 pF±20%
Working voltage	100 V
Current rating	6,5 A

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1
50	10
100	15
500	35
1000	32

Note: Jack-screws are not pre-mounted to allow mounting from any ends

				Det.	Name		Male / Female D-Sub filter adapter, 37 poles, 470 pF	Mod/Scale 1,5:1
				Detail.	03/09/07			
				Insp.		All Dim. in mm Orig. Size DIN A 4	TB 09 64 400 7220	Blatt/ Page 1 / 1
34901	01/04/08	BB	Stand.					
34894	12/03/08	PK					Sub.	
	03/09/07	JS						
Mod.	Det.	Name	HARTING EURL F-95972 Paris					