

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Harting](#)
[17660042201](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten. All rights reserved




Kontaktbelegung
contact loading



■ Position belegt
position with contact
□ Position nicht belegt
position without contact

Lochbild
board drillings

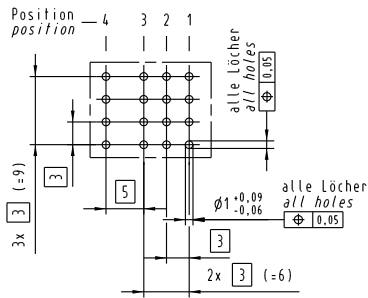

Bohrlochdurchmesser: $\phi 1,15 \pm 0,025$
Lochdurchmesser (mit Oberfläche): $\phi 1,0 \pm 0,08$
drill hole dia.: $\phi 1,15 \pm 0,025$
through hole dia. (after plating): $\phi 1,0 \pm 0,08$

All Dimensions in mm Original Size DIN A 3		Techn. Character.			Nicht tolerierte Maß/ free size tolerances	
		Bit.	Name	Maßstab/Scale	har-bus HM Power, Federleiste, gerade 4polig, Einpreßtechnik	
		Defalt.	04.03.05 Hl.	2:1	har-bus HM Power, female connector, straight 4pole, press-fit	
		Resp.	04.03.05 Hm			
		Stand.				
31705		HARTING Electronics GmbH & Co. KG			TB 17 66 004 2201	Blatt/ page
Mod.	Dat.	Name	D-32339 ESPELKAMP			