

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Lite-On, Inc.](#)  
[ASDL-4264-C31](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# ASDL-4264

## High Efficiency T-1 3/4 (5mm) Infrared (940nm) Lamp



### Data Sheet

#### Description

ASDL-4264 is a Infrared emitter that is optimized for high efficiency at emission wavelength of 940nm. This device is designed for high current and low forward voltage applications. It is encapsulated in T1-3/4 (5mm) package and is suitable for high performance replacements of standard emitters.

#### Applications

- Smoke Detector
- IR Remote Control for Consumer Devices
- IR Remote Control for Industrial Equipment
- Photo-interrupters
- Reflective Applications
- Infrared Illuminator Security Camera

#### Features

- T 1- 3/4 Package
- 940nm Wavelength
- Narrow Viewing Angle
- Low Forward Voltage
- Ideal for High Current and Low Forward Voltage Application
- Paired Device to ASDL-5770 and ASDL-5771
- Design for Smoke Detector & Fire Alarm Application
- Lead Free & ROHS Compliant
- Available in Tape & Reel

#### Ordering Information

Part Number	Lead Form	Color	Packaging	Shipping Option
ASDL-4264-C22	Straight	Clear	Tape & Reel	2000pcs
ASDL-4264-C31			Bulk	8000pcs / Carton

### Absolute Maximum Ratings at 25°C

Parameter	Symbol	Min.	Max	Unit	Reference
Peak Forward Current	$I_{FPK}$		3	A	300pps
DC Forward Current	$I_{FDC}$		150	mA	
Power Dissipation	$P_{DISS}$		250	mW	
Reverse Voltage	$V_R$		5	V	
Operating Temperature	$T_O$	-40	85	°C	
Storage Temperature	$T_S$	-55	100	°C	
LED Junction Temperature	$T_J$		110	°C	
Lead Soldering Temperature [1.6mm (0.063") From Body]			260°C for 5 seconds		


### Electrical Characteristics at 25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage	$V_F$		1.2	1.6	V	$I_{FDC}=20mA$
Reverse Voltage	$V_R$	5			V	$I_R=100uA$
Thermal Resistance Junction to Ambient	$R\theta_{ja}$		250		°C/W	

### Optical Characteristics at 25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	Bin
Radiant On-Axis Intensity	$I_E$	6.02		12.63	mW/Sr	$I_{FDC}=20mA$	Bin A
		8.42					Bin B
Viewing Angle	$2\theta_{1/2}$		22		deg		
Peak wavelength	$\lambda_{PK}$		940		nm	$I_{FDC} = 20mA$	
Spectral Width	$\Delta\lambda$		50		nm	$I_{FDC} = 20mA$	
Optical Rise Time	$t_r$		1		us	$I_{FPK}=100mA$ Duty Factor=50% Pulse Width=10us	
Optical Fall Time	$t_f$		1		us	$I_{FPK}=100mA$ Duty Factor=50% Pulse Width=10us	

**Package Dimension**

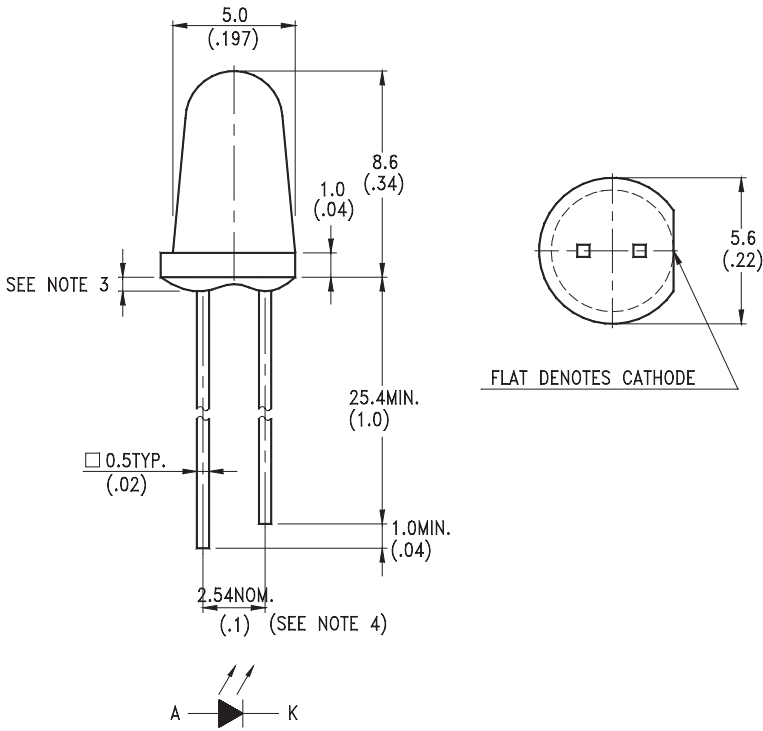

**Notes:**

1. All dimensions are in millimeters (inches)
2. Tolerance is + 0.25mm (.010") unless otherwise noted
3. Protuded resin under flange is 1.5mm (.059") max
4. Lead spacing is measured where leads emerge from package
5. Specifications are subject to change without notice

**Typical Electrical / Optical Characteristics**  
 ( $T_A = 25^\circ\text{C}$  Unless Otherwise Indicated)

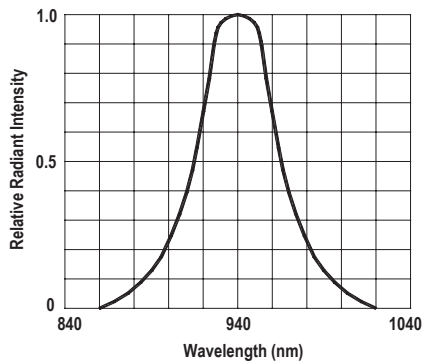


Figure 1. Spectral Distribution

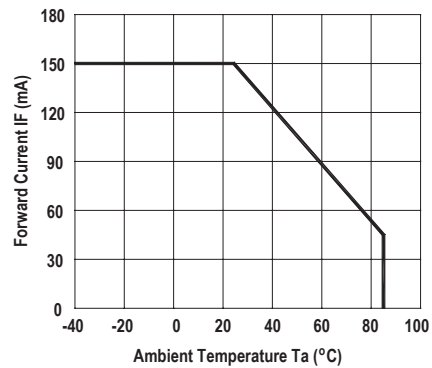


Figure 2. Forward Current Vs. Ambient Temperature

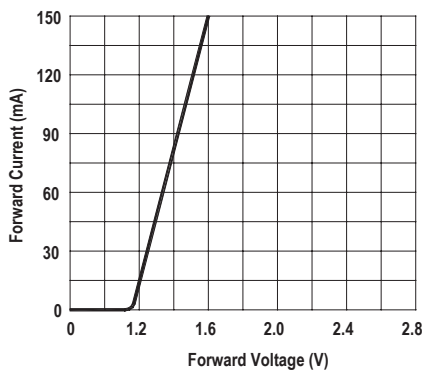


Figure 3. Forward Current Vs. Forward Voltage

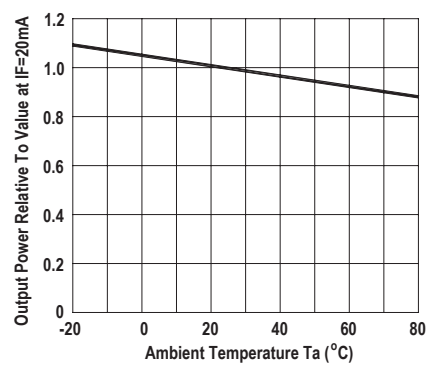


Figure 4. Relative Radiant Intensity Vs. Ambient Temperature

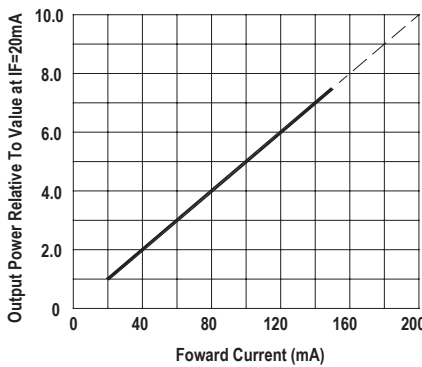


Figure 5. Relative Radiant Intensity Vs. Forward Current

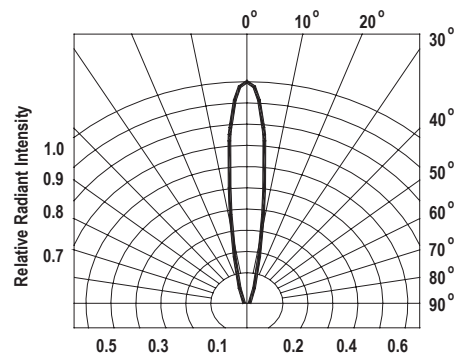


Figure 6. Radiation Diagram

For company and product information, please go to our web site: [WWW.liteon.com](http://WWW.liteon.com) or <http://optodatabook.liteon.com/databook/databook.aspx>

Data subject to change. Copyright © 2007 Lite-On Technology Corporation. All rights reserved.