

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Lite-On, Inc.](#)  
[LTD-5260Y](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## Data Sheet

### LED DISPLAY LTD-5260Y

## LED DISPLAY

### LTD-5260Y

<u>Rev</u>	<u>Description</u>	<u>By</u>	<u>Date</u>
01	Preliminary SPEC	Tina Chen	04/04/2000
<b>Above data for PD and Customer tracking only</b>			
-	NPPR Received and Upload to system	Tina Chen	05/04/2000
A	- Correct hue range on page 5 - Update Operating/Storage Temperature Range from -35°C to +85°C become to -35°C to +105°C	Phanomkorn	01/23/2014
B	-Change unit of Average Luminous Intensity Per Segment from mcd to ucd	Phanomkorn	06/04/2014



## Data Sheet

# LED DISPLAY LTD-5260Y

### 1. Description

The LTD-5260Y is a 0.52inch (13.2mm) digit height dual digit seven-segment display. The device utilizes yellow LED chips, which are made from GaAsP on a transparent GaP substrate, and has a gray face and white segments.

#### 1.1 Features

- 0.52INCH (13.2mm) DIGIT HEIGHT
- CONTINUOUS UNIFORM SEGMENTS
- LOW POWER REQUIREMENT
- EXCELLENT CHARACTERS APPEARANCE
- HIGH BRIGHTNESS & HIGH CONTRAST
- WIDE VIEWING ANGLE
- SOLID STATE RELIABILITY
- CATEGORIZED FOR LUMINOUS INTENSITY
- **LEAD-FREE PACKAGE (ACCORDING TO ROHS)**

#### 1.2 Device


Part No	Description
YELLOW	COMMON CATHODE
LTD-5260Y	RT. HAND DECIMAL



Data Sheet

**LED DISPLAY  
LTD-5260Y**

**2. Package Dimensions**

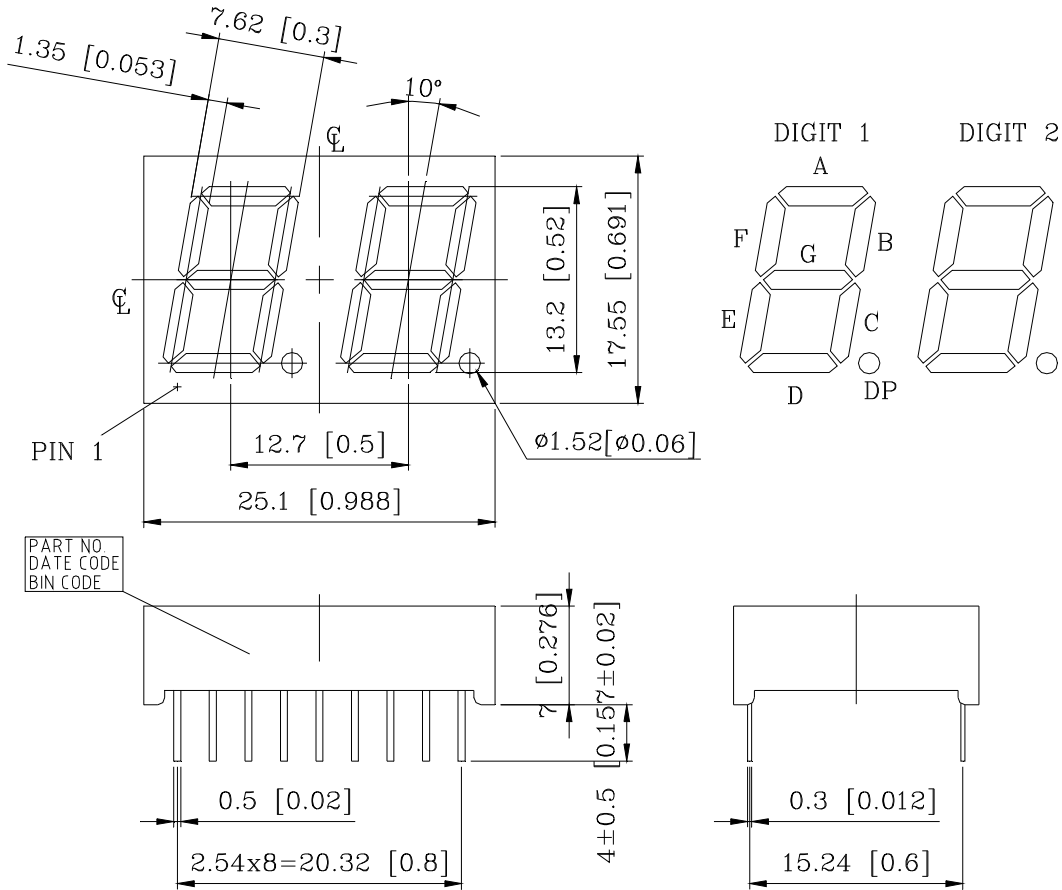

**Notes :**


1. All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm (0.01") unless otherwise noted
2. Pin tip's shift tolerance is  $\pm 0.4$  mm
3. Foreign material on segment  $\leq 10$ mil
4. Bending  $\leq 1\%$  of reflector length
5. Bubble in segment  $\leq 10$ mil
6. Ink contamination on surface  $\leq 20$ mil



## Data Sheet

### LED DISPLAY LTD-5260Y

#### 3. Internal Circuit Diagram

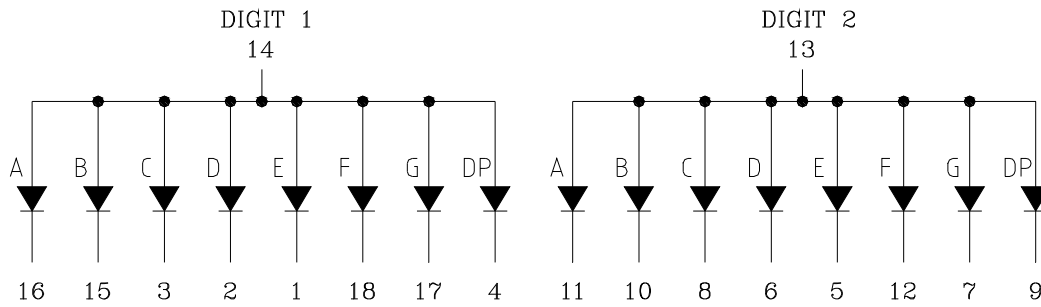

#### 4. Pin Connection

No	Connection
1	CATHODE E (DIGIT 1)
2	CATHODE D (DIGIT 1)
3	CATHODE C (DIGIT 1)
4	CATHODE DP (DIGIT 1)
5	CATHODE E (DIGIT 2)
6	CATHODE D (DIGIT 2)
7	CATHODE G (DIGIT 2)
8	CATHODE C (DIGIT 2)
9	CATHODE DP (DIGIT 2)
10	CATHODE B (DIGIT 2)
11	CATHODE A (DIGIT 2)
12	CATHODE F (DIGIT 2)
13	COMMON ANODE (DIGIT 2)
14	COMMON ANODE (DIGIT 1)
15	CATHODE B (DIGIT 1)
16	CATHODE A (DIGIT 1)
17	CATHODE G (DIGIT 1)
18	CATHODE F (DIGIT 1)



## Data Sheet

# LED DISPLAY LTD-5260Y

### 5. Rating and Characteristics

#### 5.1. Absolute Maximum Rating at Ta=25°C

Parameter	Maximum Rating	Unit
Power Dissipation Per Segment	60	mW
Peak Forward Current Per Segment ( 1/10 Duty Cycle, 0.1ms Pulse Width )	80	mA
Continuous Forward Current Per Segment Derating Linear From 25°C Per Segment	20 0.22	mA mA/°C
Operating Temperature Range	-35°C to +105°C	
Storage Temperature Range	-35°C to +105°C	

Solder Condition: 1/16 inch below seating plane for 3 seconds at 260°C or temperature of unit (during assembly) not over max. temperature rating above

#### 5.2. Electrical / Optical Characteristics at Ta=25°C

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Test Condition
Average Luminous Intensity Per Segment	IV	800	2200		ucd	IF=10mA
Peak Emission Wavelength	$\lambda_p$		585		nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$		35		nm	IF=20mA
Dominant Wavelength	$\lambda_d$		588		nm	IF=20mA
Forward Voltage Per Chip	VF		2.1	2.6	V	IF=20mA
Reverse Current Per Segment <sup>(3)</sup>	IR			100	μA	VR=5V
Luminous Intensity Matching Ratio (Similar Light Area)	IV-m			2:1		IF=10mA

#### Notes :

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission International De L'Eclairage) eye-response curve
- Crosstalk specification  $\cong$  1%
- Reverse voltage is only for IR test. It cannot continue to operate at this situation



Data Sheet

**LED DISPLAY  
LTD-5260Y**

**5.3. Typical Electrical / Optical Characteristics Curves**

(25°C Ambient Temperature Unless Otherwise Noted)

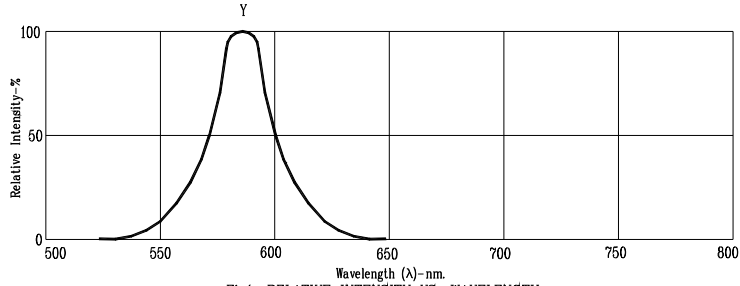


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)




Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.




Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE : Y=YELLOW