

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0422491000](#)



For any questions, you can email us directly:
sales@integrated-circuit.com

NOTES:

1. MATERIAL: HEADER: GLASS-FILLED POLYESTER, UL94V-0. COLOR: WHITE
PIN : BRASS
2. FINISH:
.000100/(0.00254) MIN. TIN OVER
.000050/(0.00127) MIN. NICKEL UNDERPLATE.
3. PRODUCT SPECIFICATION: PS-42219-0001.
4. PACKAGING SPECIFICATION: PK-42249-0001
5. ALL PINS ARE KINKED.
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

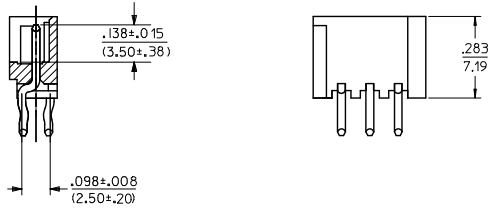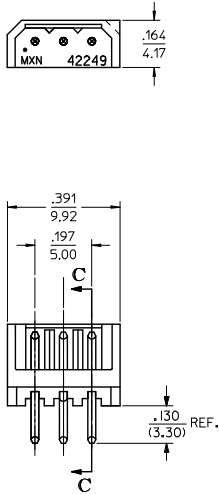

SECTION C-C

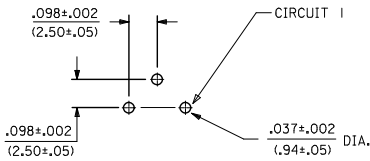

PCB HOLE LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: .062 (1.57)

ADD PK SPEC EC NO: UCP2013-2919 DRAWN BY: 2013/01/17 CHKD BY: 2013/01/17 APPROVED BY: 2013/01/29	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		mm	INCH	DRAWN BY ELHAG	DATE 2005/03/05	TITLE 2.5 MM HEADER ASSEMBLY (STAGGERED PINS) 3 CKT			
REV B2	DESCRIPTION	4 PLACES	±	---	CHECKED BY ELHAG	DATE 2005/03/05			
		3 PLACES	±	---	APPROVED BY FSMITH	DATE 2005/03/07			
		2 PLACES	±	0.25			MATERIAL NO. 42249-1000		
		1 PLACE	±	0.36			DOCUMENT NO. SD-42249-001		
		0 PLACE	±	---			SHEET NO. 1 OF 1		
		ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			