

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0534812079](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

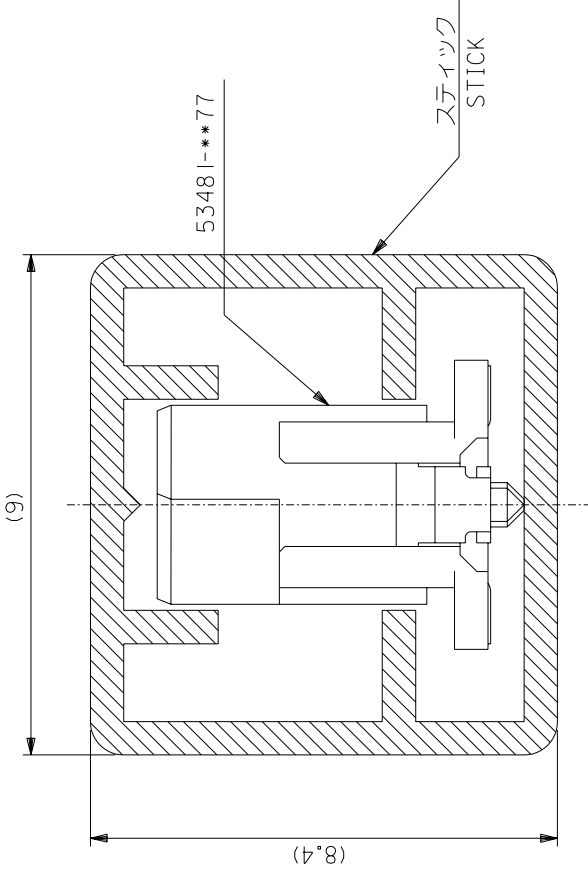

注) NOTES.

1. スティック両端はキャップ止め。  
BOTH ENDS WITH CAPS.
2. 全長:  $600 \pm 2$   
TOTAL LENGTH
3. 肉厚:  $0.6 \pm 0.2$   
THICKNESS
4. 量産対応済の極数については、SD-53481-\*\*-77を参照下さい。  
SEE SD-53481-\*\*-77 FOR AVAIRABLE ITEMS.
5. 本製品は SD-53481-\*\*-9 の鉛フリー製品です。

6	53481-2479	240
8	-2079	200
8	-1879	180
9	-1679	160
11	-1479	140
12	-1279	120
14	-1079	100
15	-0979	90
17	-0879	80
19	-0779	70
19	-6879	68
21	-0679	60
24	-0579	50
28	-0479	40
34	-0379	30
42	53481-0279	20
梱包数 QUANTITY		極数 NO. OF CKT.

角度	ANGLE	13°
以上	OVER	+0.3
以下	UNDER	+0.25
公差	TOLERANCE	+0.2
一般公差 GENERAL TOLERANCES		

材料 MATERIAL	MOLEX-JAPAN CO.,LTD. MOLEX 日本モレックス株式会社	
スティック STICK	ポリ塩化ビニル P.V.C	
仕上げ FINISH	—	
適用電線範囲 WIRE RANGE	—	
被覆外径 INS. RANGE	—	
新編作成 RELEASED	DATE	CHK'D BY
12004-1474	03/12/11	M.SASAO
変更内容 REVISION RECORD	DR	DATE
REVISE ONLY ON CAD SYSTEM		
TITLE 名称 53481-**-77		
STICK PACKAGING -LEAD FREE-		
DWG. NO.	SD-53481-**-79	REV
		0

DWG. NO.  
SD-53481-\*\*-79


D

C

B : MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

B

A

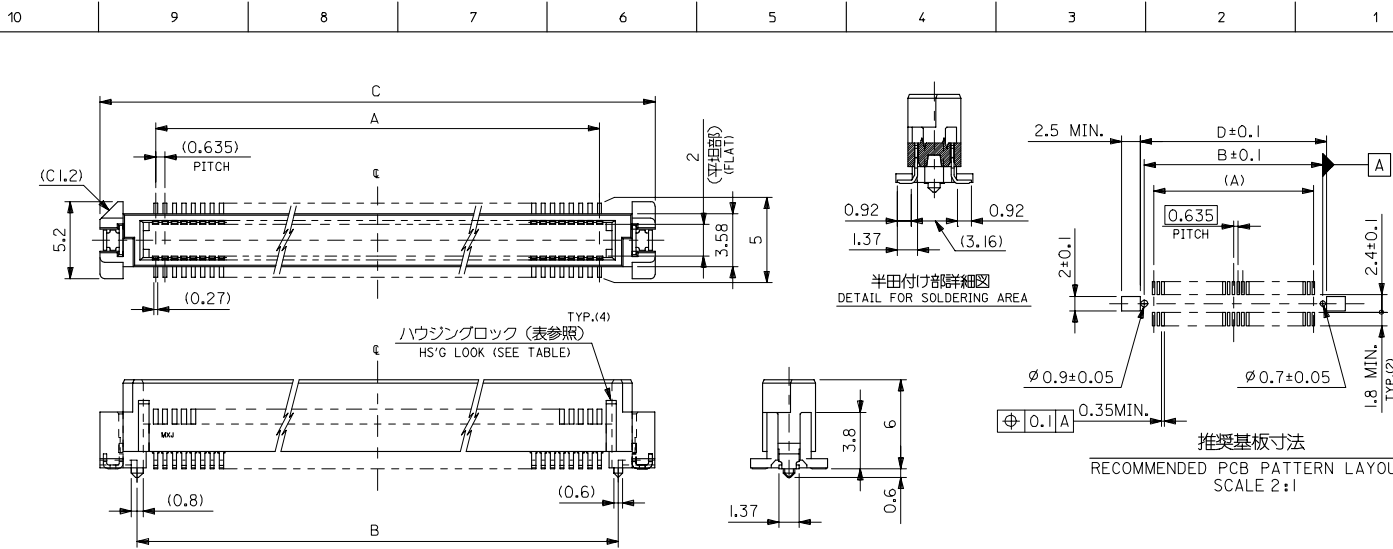

- 注) NOTES
- 材質  
MATERIAL  
ハウジング : ガラス入りPPS、茶色、UL94V-0  
HOUSING:G.F.PPS,BROWN,UL94V-0  
ターミナル : 銅合金 (t=0.2)  
TERMINAL:COPPER ALLOY
  - メッキ仕様  
PLATING  
接点部 : 金メッキ 0.25μm MIN.  
CONTACT AREA:GOLD 0.25μm MIN.  
半田付け部 : 錫メッキ 1.0μm MIN.  
SOLDER TAIL AREA:TIN 1.0μm MIN.  
下地メッキ : ニッケルメッキ 1.5μm MIN.  
UNDER-PLATING:NICKEL 1.5μm MIN.
  - テールのバラツキ寸法  
TAIL COPLANARITY  
テール平坦度は0.1MAX.とする。  
TAIL COPLANARITY TO BE 0.1 MAX.
  - 本製品は53481-\*\*\*7の鉛フリー製品です。  
THIS PRODUCT IS LEAD FREE OF 53481-\*\*\*7.

7 mm	52760-***70
基板間寸法 STACKING HEIGHT	嵌合相手 TO BE MATED WITH

無し NO	79.17	83.07	78.07	75.565	53481-2479	53481-2477	240	○		
	66.47	70.37	65.37	62.865	-2079	-2077	200	○		
	60.12	64.02	59.02	56.515	-1879	-1877	180	○		
	53.77	57.67	52.67	50.165	-1679	-1677	160	○		
	47.42	51.32	46.32	43.815	-1479	-1477	140	○		
	41.07	44.97	39.97	37.465	-1279	-1277	120	○		
	34.72	38.62	33.62	31.115	-1079	-1077	100	○		
	31.55	35.45	30.45	27.94	-0979	-0977	90	○		
	28.37	32.27	27.27	24.765	-0879	-0877	80	○		
	25.2	29.1	24.1	21.59	-0779	-0777	70	○		
有り YES	24.56	28.46	23.46	20.955	-6879	-6877	68	○		
	22.02	25.92	20.92	18.415	-0679	-0677	60	○		
	18.85	22.75	17.75	15.24	-0579	-0577	50	○		
	15.67	19.57	14.57	12.065	-0479	-0477	40	○		
	12.5	16.4	11.4	8.89	-0379	-0377	30	○		
	9.32	13.22	8.22	5.715	53481-0279	53481-0277	20	○		
	ハウジング HSG LOOK		D	C	B	A	スティック梱包 STICK PACKAGING	製品番号 MATERIAL NO.	検数 CKT. NO.	備考 AVAILABLE
	DIMENSION STYLE		MM ONLY		SCALE		4:1		DESIGN UNITS	
	DRAWN BY		DATE		TITLE		0.635 PITCH B-TO-B S/T PLUG HSG ASSY -LEAD FREE-			
	CHECKED BY		DATE		APPROVED BY		DATE		MATERIAL NO.	
REVISION		DESCRIPTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		MOLEX INCORPORATED				
REVISED		EC NO.: J2007-0453		10 UNDER ±0.2		SD-53481-003				
DRW: NKSAT001		2006/08/24		10 OVER ±0.25		SHEET NO.				
CHKD: HARUYAMA		2006/08/24		30 OVER ±0.3		1 OF 1				
APP: NIKITA		2006/08/24		ANGULAR ±3°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
FINISH		A		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		EN-02JA(021)				

材料 MATERIAL	注) 参照 SEE NOTES
仕上げ FINISH	注) 参照 SEE NOTES