

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0512391201](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DWG. NO. SD-51239-004

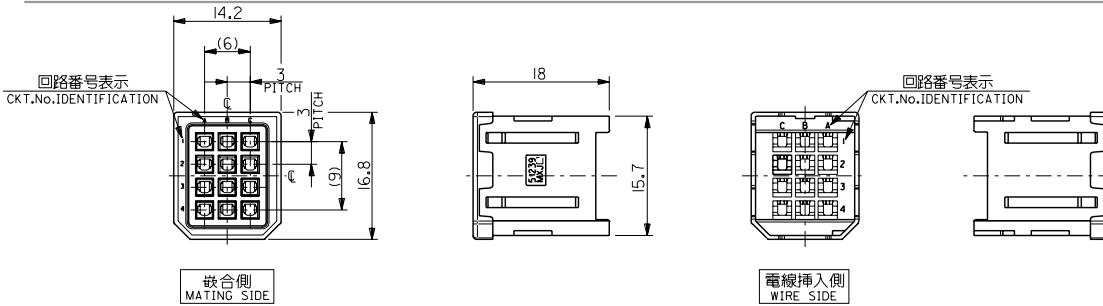

注記 NOTES

1. 材質 MATERIAL
ガラス入りPBT樹脂 UL94V-0 色:黒
HOUSING: PBT G.F. UL94V-0 COLOR: BLACK
2. 適用端子: 56120-8*90, 56121-8*90
APPLICABLE CRIMP PIN: 56120-8*90, 56121-8*90
3. 適用シールドボディ: 56380-1200
APPLICABLE SHIELD BODY: 56380-1200
4. 適用シールドカバー: 56381-1200
APPLICABLE SHIELD COVER: 56381-1200
5. 嵌合相手: 51233-121*
MEET WITH: 51233-121*

<誤嵌合防止キー(極性)タイプ> <POLARITY KEY TYPE>

51239-1201	51239-1202	51239-1203	51239-1204	51239-1205
STANDARD TYPE	A TYPE	B TYPE	C TYPE	D TYPE

A-2	D	51239-1205	51239-***	12	
C-3	C	51239-1204			
B-3	B	51239-1203			
B-2	A	51239-1202			
—	STANDARD	51239-1201			
POLARITY POSITION (CIRCUIT No.)		POLARITY TYPE	MATERIAL No.	MODEL No.	CIRCUIT

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	REVISED 01/10/04	MATERIAL 材料	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS mm INCH	THIRD ANGLE PROJECTION	DIMENSIONS: mm INCH mm ONLY	SHT REV
			EC NO. J2002-0786 DRWN: SAKIYAMA CHK: MIYAZAWA APPR: YOHIO							
8	7	6	A	DESCRIPTION	10 OVER 30 UNDER 未満 ±0.25	APPROVED BY & DATE S. Akigawa 01/25	MATERIAL NO. SEE CHART	DRAWING NO. SD-51239-004	SHEET NO. 1 OF 1	REVISE ON CAD ONLY
			0	WIRE RANGE 適用電線範囲	30 OVER 未満 ±0.3					
			REV	JNS. RANGE 接線外径	ANGLE 角度 ±3°	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		EN-02J(097) MXJ-54		

A 101239004.S01