

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)  
[0702800928](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

CKT. SIZE	DIM. A REF.		DIM. B REF.		
	(MM)	INCH	(MM)	INCH	
J	4	(5.08)	.200	(2.54)	.100
	6	(7.62)	.300	(5.08)	.200
	8	(10.16)	.400	(7.62)	.300
	10	(12.70)	.500	(10.16)	.400
	12	(15.24)	.600	(12.70)	.500
	14	(17.78)	.700	(15.24)	.600
I	16	(20.32)	.800	(17.78)	.700
	18	(22.86)	.900	(20.32)	.800
	20	(25.40)	1.000	(22.86)	.900
	22	(27.94)	1.100	(25.40)	1.000
	24	(30.48)	1.200	(27.94)	1.100
	26	(33.02)	1.300	(30.48)	1.200
	28	(35.56)	1.400	(33.02)	1.300
H	30	(38.10)	1.500	(35.56)	1.400
	32	(40.64)	1.600	(38.10)	1.500
	34	(43.18)	1.700	(40.64)	1.600
	36	(45.72)	1.800	(43.18)	1.700
	38	(48.26)	1.900	(45.72)	1.800
	40	(50.80)	2.000	(48.26)	1.900
G	42	(53.34)	2.100	(50.80)	2.000
	44	(55.88)	2.200	(53.34)	2.100
	46	(58.42)	2.300	(55.88)	2.200
	48	(60.96)	2.400	(58.42)	2.300
	50	(63.50)	2.500	(60.96)	2.400
	52	(66.04)	2.600	(63.50)	2.500
	54	(68.58)	2.700	(66.04)	2.600
F	56	(71.12)	2.800	(68.58)	2.700
	58	(73.66)	2.900	(71.12)	2.800
	60	(76.20)	3.000	(73.66)	2.900
	62	(78.74)	3.100	(76.20)	3.000
	64	(81.28)	3.200	(78.74)	3.100
	66	(83.82)	3.300	(81.28)	3.200
	68	(86.36)	3.400	(83.82)	3.300
E	70	(88.90)	3.500	(86.36)	3.400
	72	(91.44)	3.600	(88.90)	3.500
	74	(93.98)	3.700	(91.44)	3.600
	76	(96.52)	3.800	(93.98)	3.700
	78	(99.06)	3.900	(96.52)	3.800
	80	(101.60)	4.000	(99.06)	3.900
D	82	(104.14)	4.100	(101.60)	4.000
	84	(106.68)	4.200	(104.14)	4.100
	86	(109.22)	4.300	(106.68)	4.200
	88	(111.76)	4.400	(109.22)	4.300
	90	(114.30)	4.500	(111.76)	4.400
	92	(116.84)	4.600	(114.30)	4.500
C	94	(119.38)	4.700	(116.84)	4.600
	96	(121.92)	4.800	(119.38)	4.700
	98	(124.46)	4.900	(121.92)	4.800
	100	(127.00)	5.000	(124.46)	4.900

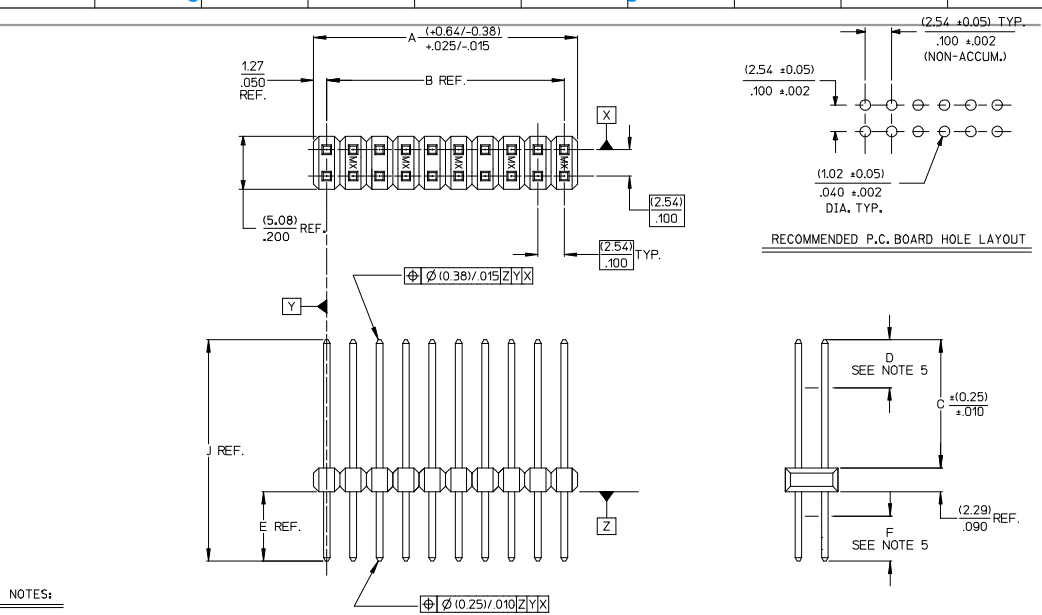

NOTES:

- MATERIAL:  
PIN: COPPER ALLOY  
WAFER: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER, UL 94V-0, COLOR: BLACK.
- FINISH:  
TIN = (0.00380)/0.000150 MINIMUM TIN PLATE OVER (0.00127)/0.000050 MINIMUM NICKEL PLATE OVER (0.00038)/0.000015 MINIMUM GOLD PLATE IN SELECT AREA.  
15 GOLD = (0.00127)/0.000050 MINIMUM NICKEL PLATE OVER (0.00078)/0.000030 MINIMUM GOLD PLATE IN SELECT AREA.  
30 GOLD = (0.00190)/0.000075 MINIMUM TIN PLATE IN SELECT AREA, OVER (0.00127)/0.000050 MINIMUM NICKEL PLATE OVER (0.00078)/0.000030 MINIMUM GOLD PLATE IN SELECT AREA.  
GT 15 = (0.00038)/0.000015 MINIMUM GOLD PLATE IN SELECT AREA, OVER (0.00254)/0.000100 MINIMUM TIN PLATE IN SELECT AREA, OVER (0.00127)/0.000050 MINIMUM NICKEL PLATE OVER.
- PRODUCT SPECIFICATION NONE
- PACKAGING INFORMATION: (UNLESS OTHERWISE NOTED IN TABLES) BULK PACK PER PK-70873-0353.
- MEASURE POINT FOR PLATING THICKNESS.
- FOR ASSEMBLIES WITH VOIDED PINS, REFER TO DRAWING NO. SDA-70280-5001-9999.
- PIN PUSHOUT FORCE 3 POUNDS MINIMUM IN EITHER DIRECTION.
- FOR ILLUSTRATION PURPOSES, 20 (DUAL 10) CIRCUIT SIZE IS SHOWN.
- PINS MEET SOLDERABILITY SPEC SMES-152. ABSENCE OF PLATING PERMISSIBLE AT BANDOLIER PIN FAYING SURFACE. (APPROXIMATELY (0.64)/0.025 INCH LONG BY (0.15)/0.006 INCH WIDE AT 2 LOCATIONS)
- PARTS CONFORM TO CLASS B OF COSMETIC SPECIFICATION PS-45499-002

\* THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC" CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD PLATING.

ADD P/N 70280-1254 EC NO: LCP2006-2306 DRAWN: JELL 2008/03/3 CHKD: SCHMIDT 2008/04/07 APPROVED: JELL 2008/04/24 DESCRIPTION: CONN HDR BKWY VERT GOLD 100POS	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION															
	$\nabla=0$ $\nabla=0$	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±.005</td> </tr> <tr> <td>2 PLACES</td> <td>±.013</td> <td>±.01</td> </tr> <tr> <td>1 PLACE</td> <td>±0.25</td> <td>±---</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±.013	±.01	1 PLACE	±0.25	±---	MM/IN	4:1	INCH	
		mm	INCH																		
	4 PLACES	±---	±---																		
3 PLACES	±---	±.005																			
2 PLACES	±.013	±.01																			
1 PLACE	±0.25	±---																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY: SMR CHECKED BY: SMR DATE: 04/19/1993	DATE: 04/19/1993	TITLE: SALES ASSY-HIGH TEMP. DUAL ROW WAFER W/BREAK-OFF OPT. .025 SQ PINS	APPROVED BY: SMR DATE: 04/19/1993	MOLEX INCORPORATED	MATERIAL NO.: SDA-70280-0001-4000 DOCUMENT NO.: SHEET NO.: 1 OF 9															
G6	REN	SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		



Distributor of Molex Connector Corporation: Excellent Integrated System Limited

Datasheet of 0702800928 - CONN HDR BKWY VERT GOLD 100POS

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

J	ENGINEERING NUMBER A-70280-	RELEASE FOR MANUFACTURE	E REF.	J REF.	C (0.25) ± .010	CONNECTOR END PLATING			P.C. BOARD END PLATING			FOR PACKAGING INFORMATION, SEE NOTE 4, SHEET 1 (UNLESS OTHERWISE SPECIFIED BELOW)
						TYPE	D MEAS.	F MEAS.	TYPE	F MEAS.		
	-0899/-0908	R.F.M.	(4.45) .175	(12.83) .505	(6.10) .240	30 GOLD	(2.54) .100		TIN	(1.27) .050		
	-0909/-0918	R.F.M.	(4.70) .185	(15.11) .595	(8.13) .320	TIN	(4.57) .180		TIN	(1.27) .050		
I	-0919/-0928	R.F.M.	(4.70) .185	(15.11) .595	(8.13) .320	15 GOLD	(4.57) .180		TIN	(1.27) .050		
	-0929/-0938	R.F.M.	(4.70) .185	(15.11) .595	(8.13) .320	30 GOLD	(4.57) .180		TIN	(1.27) .050		
	-0939/-0948	R.F.M.	(5.08) .200	(13.21) .520	(5.84) .230	TIN	(2.54) .100		TIN	(1.27) .050		

G	CKTS	EDP NUMBER	ENG NUMBER	EDP NUMBER	ENG NUMBER	EDP NUMBER	ENG NUMBER	EDP NUMBER	ENG NUMBER	EDP NUMBER	ENG NUMBER	EDP NUMBER	ENG NUMBER	CKTS
	82	70280-0899	A-70280-0899	70280-0909	A-70280-0909	70280-0919	A-70280-0919	70280-0929	A-70280-0929	70280-0939	A-70280-0939			82
	84	70280-0900	A-70280-0900	70280-0910	A-70280-0910	70280-0920	A-70280-0920	70280-0930	A-70280-0930	70280-0940	A-70280-0940			84
	86	70280-0901	A-70280-0901	70280-0911	A-70280-0911	70280-0921	A-70280-0921	70280-0931	A-70280-0931	70280-0941	A-70280-0941			86
	88	70280-0902	A-70280-0902	70280-0912	A-70280-0912	70280-0922	A-70280-0922	70280-0932	A-70280-0932	70280-0942	A-70280-0942			88
	90	70280-0903	A-70280-0903	70280-0913	A-70280-0913	70280-0923	A-70280-0923	70280-0933	A-70280-0933	70280-0943	A-70280-0943			90
	92	70280-0904	A-70280-0904	70280-0914	A-70280-0914	70280-0924	A-70280-0924	70280-0934	A-70280-0934	70280-0944	A-70280-0944			92
F	94	70280-0905	A-70280-0905	70280-0915	A-70280-0915	70280-0925	A-70280-0925	70280-0935	A-70280-0935	70280-0945	A-70280-0945			94
	96	70280-0906	A-70280-0906	70280-0916	A-70280-0916	70280-0926	A-70280-0926	70280-0936	A-70280-0936	70280-0946	A-70280-0946			96
	98	70280-0907	A-70280-0907	70280-0917	A-70280-0917	70280-0927	A-70280-0927	70280-0937	A-70280-0937	70280-0947	A-70280-0947			98
	100	70280-0908	A-70280-0908	70280-0918	A-70280-0918	70280-0928	A-70280-0928	70280-0938	A-70280-0938	70280-0948	A-70280-0948			100

E	D	C	B	A																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; vertical-align: top;"> <p>UPDATE DIMENSIONS EC NO: UCP2007-1440 DRAWN BY: 2006/12/18 CHKD BY: 2006/12/18 APPROVED BY: 2007/07/10</p> </td> <td style="width: 10%; vertical-align: top;"> <p>QUALITY SYMBOLS ▽=0 ∇=0</p> </td> <td style="width: 20%; vertical-align: top;"> <p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>2 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>1 PLACE</td> <td>± .005</td> <td>± .0004</td> </tr> </table> <p>ANGULAR ±1/2°</p> </td> <td style="width: 15%; vertical-align: top;"> <p>DIMENSION STYLE MM/IN</p> <p>SCALE ---</p> <p>DESIGN UNITS INCH</p> <p>THIRD ANGLE PROJECTION</p> </td> <td style="width: 35%; vertical-align: top;"> <p>DRAWN BY: DMORGAN DATE: 04/12/16 CHECKED BY: BBARER DATE: 04/12/16 APPROVED BY: SMILLER DATE: 04/12/16</p> <p>TITLE SALES ASSY-HIGH TEMP. DUAL ROW WAFER W/BREAK-OFF OPTION, .025 SQ PINS</p> <p>MATERIAL NO. SEE CHART DOCUMENT NO. SDA-70280-0001-4000</p> <p>SHEET NO. 7 OF 8</p> <p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p> </td> </tr> </table>					<p>UPDATE DIMENSIONS EC NO: UCP2007-1440 DRAWN BY: 2006/12/18 CHKD BY: 2006/12/18 APPROVED BY: 2007/07/10</p>	<p>QUALITY SYMBOLS ▽=0 ∇=0</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>2 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>1 PLACE</td> <td>± .005</td> <td>± .0004</td> </tr> </table> <p>ANGULAR ±1/2°</p>		mm	INCH	4 PLACES	± .005	± .0004	3 PLACES	± .005	± .0004	2 PLACES	± .005	± .0004	1 PLACE	± .005	± .0004	<p>DIMENSION STYLE MM/IN</p> <p>SCALE ---</p> <p>DESIGN UNITS INCH</p> <p>THIRD ANGLE PROJECTION</p>	<p>DRAWN BY: DMORGAN DATE: 04/12/16 CHECKED BY: BBARER DATE: 04/12/16 APPROVED BY: SMILLER DATE: 04/12/16</p> <p>TITLE SALES ASSY-HIGH TEMP. DUAL ROW WAFER W/BREAK-OFF OPTION, .025 SQ PINS</p> <p>MATERIAL NO. SEE CHART DOCUMENT NO. SDA-70280-0001-4000</p> <p>SHEET NO. 7 OF 8</p> <p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>
<p>UPDATE DIMENSIONS EC NO: UCP2007-1440 DRAWN BY: 2006/12/18 CHKD BY: 2006/12/18 APPROVED BY: 2007/07/10</p>	<p>QUALITY SYMBOLS ▽=0 ∇=0</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>2 PLACES</td> <td>± .005</td> <td>± .0004</td> </tr> <tr> <td>1 PLACE</td> <td>± .005</td> <td>± .0004</td> </tr> </table> <p>ANGULAR ±1/2°</p>		mm	INCH	4 PLACES	± .005	± .0004	3 PLACES	± .005	± .0004	2 PLACES	± .005	± .0004	1 PLACE	± .005	± .0004	<p>DIMENSION STYLE MM/IN</p> <p>SCALE ---</p> <p>DESIGN UNITS INCH</p> <p>THIRD ANGLE PROJECTION</p>	<p>DRAWN BY: DMORGAN DATE: 04/12/16 CHECKED BY: BBARER DATE: 04/12/16 APPROVED BY: SMILLER DATE: 04/12/16</p> <p>TITLE SALES ASSY-HIGH TEMP. DUAL ROW WAFER W/BREAK-OFF OPTION, .025 SQ PINS</p> <p>MATERIAL NO. SEE CHART DOCUMENT NO. SDA-70280-0001-4000</p> <p>SHEET NO. 7 OF 8</p> <p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>					
	mm	INCH																						
4 PLACES	± .005	± .0004																						
3 PLACES	± .005	± .0004																						
2 PLACES	± .005	± .0004																						
1 PLACE	± .005	± .0004																						