

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0424109080](#)



For any questions, you can email us directly:

sales@integrated-circuit.com


NOTES:
1) MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL 94 V-0, COLOR IS BLACK; TERMINALS ARE .015(0.38) THICK PHOSPHOR BRONZE.
2) TERMINAL PLATING OPTIONS PER ES-88-****:
A - SELECT GOLD IN CONTACT AREA; 50 MICRONS MIN.
SELECT MATTIE TN IN PC TAIL AREA; 100 MICRONS MIN.
WITH OVERALL NICKEL UNDERPLATE; 50 MICRONS MIN.
3) THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
4) CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
5) ALL JACKS ARE DESIGNED TO BE USED WITH .062(1.57) OR .025(0.63) THICK P.C. BOARDS.
6) ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICRONS GOLD.
7) ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
8) SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
9) SEE SHEETS 3 & 4 FOR CONNECTOR SIZE 8.
10) SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
11) PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
12) ENGRAVED NUMBERS ON HOUSING BODY ARE FOR MOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
13) ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)
0.062"	.128 (3.25)	.120 ± 0.015 - .025 (3.05 ± 0.38 - .63)
0.125"	.191 (4.85)	.205 ± 0.015 - .025 (5.21 ± 0.38 - .63)


CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
4	4	.150 (3.81)
4	2	.050 (1.27)

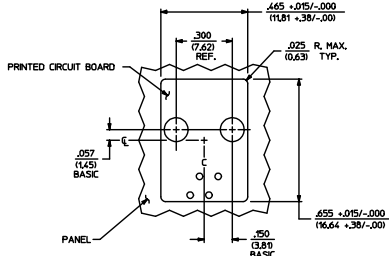

PANEL CUT-OUT FOR CONNECTOR SIZE 4

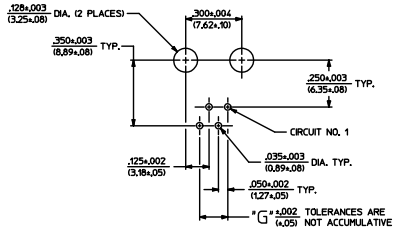

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 4
VIEWED FROM COMPONENT SIDE

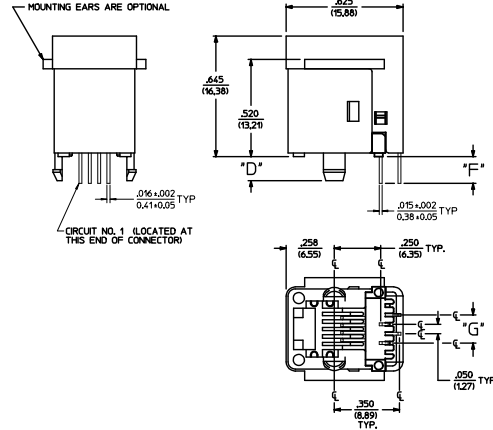



SIZE 4 MODULAR JACK LOADED WITH 4 TERMINALS SHOWN ABOVE
(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
▽=0	4 PLACES ± .010	DRAWN BY	DATE	TITLE	ASSEMBLY, VERTICAL MODULAR JACKS
▽=0	3 PLACES ± .025	CHECKED BY	DATE		
▽=0	2 PLACES ± .050	APPROVED BY	DATE		
▽=0	1 PLACE ± .100	MATERIAL NR.	2012/02/14		
▽=0	0 PLACE ± .150	DOCUMENT NO.	SDA-42410-****		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 4		SHEET NO. 1 OF 4	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					


- NOTES:
- MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL1, 94 V-0, COLOR IS BLACK, TERMINALS ARE .015(0.38) THICK PHOSPHOR BRONZE.
 - TERMINAL PLATING OPTIONS PER ES-88-****:
 - SELECT GOLD IN CONTACT AREA: 50 MICRONS MIN. SELECT MATTE TIN IN PC TAIL AREA: 100 MICRONS MIN. WITH OVERALL NICKEL UNDERPLATE: 50 MICRONS MIN.
 - SELECT GOLD IN CONTACT AREA: 15 MICRONS MIN. SELECT MATTE TIN IN PC TAIL AREA: 100 MICRONS MIN. WITH OVERALL NICKEL UNDERPLATE: 50 MICRONS MIN.
 - THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
 - CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-49Z.
 - ALL JACKS ARE DESIGNED TO BE USED WITH .062(1.57) OR .051(1.31) THICK P.C. BOARDS.
 - ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICRONS GOLD.
 - ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
 - SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
 - SEE SHEETS 3 & 4 FOR CONNECTOR SIZE 8.
 - SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-5499-002.
 - ENGRAVED NUMBERS ON HOUSING BODY ARE FOR HOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
 - ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

P.C. BOARD THICKNESS	DIM. 'D' (MTG. PEGS)	DIM. 'F' (P.C. TAILS)
0.062(1.57)	.128 (3.25)	.120 +.015/-0.025 (3.05 +.38/-63)
0.125(3.18)	.191 (4.85)	.205 +.015/-0.025 (5.21 +.38/-63)

CONNECTOR SIZE	CIRCUIT SIZE	DIM. 'G'
6	6	.250 (6.35)
6	4	.150 (3.81)
6	2	.050 (1.27)

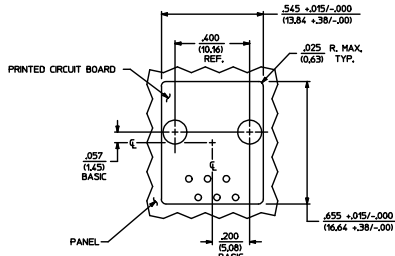


PANEL CUT-OUT FOR CONNECTOR SIZE 6

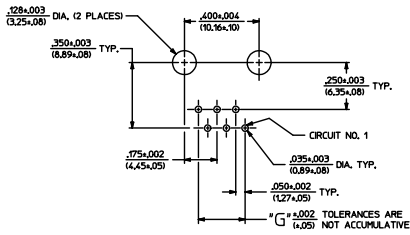

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 6

VIEWED FROM COMPONENT SIDE

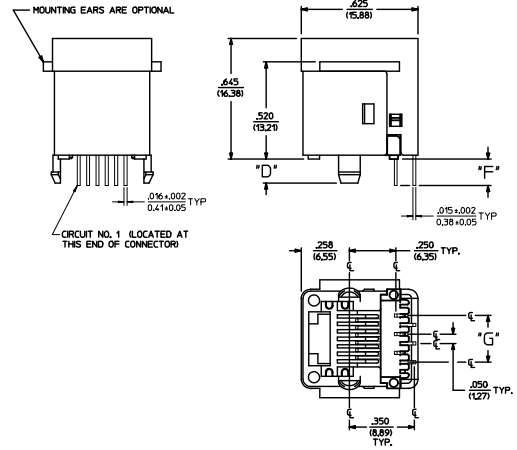

SIZE 6 MODULAR JACK LOADED WITH 6 TERMINALS SHOWN ABOVE

(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	mm	INCH	IN/MM	INCH				
∇=0	4 PLACES	± .010	IN	DATE	4:1	INCH	ASSEMBLY, VERTICAL MODULAR JACKS	
∇=0	3 PLACES	± .010	DATE	DRAWN BY				
∇=0	2 PLACES	± .025	DATE					CHECKED BY
∇=0	1 PLACE	± .050	DATE	DATE				
∇=0	0 PLACE	± .100	DATE	DATE	DATE	DATE	DATE	
ANGULAR ±1/2°			DATE		DATE		DATE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DATE		DATE		DATE	




DOCUMENT NO. SDA-42410-**** SHEET NO. 2 OF 4


- NOTES:
- MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL, 94 V-0, COLOR IS BLACK; TERMINALS ARE .015(0.38) THICK PHOSPHOR BRONZE.
 - TERMINAL PLATING OPTIONS PER ES-88-444-:
 - A - SELECT GOLD IN CONTACT AREA: 50 MICRONS MIN. SELECT MATTE TN IN PC TAIL AREA: 100 MICRONS MIN. WITH OVERALL NICKEL UNDERPLATE: 50 MICRONS MIN.
 - THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
 - CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
 - ALL JACKS ARE DESIGNED TO BE USED WITH .062(1.57) OR .125(3.18) THICK P.C. BOARDS.
 - ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICRONS OF GOLD.
 - ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
 - SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
 - SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
 - SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 - ENGRAVED NUMBERS ON HOUSING BODY ARE FOR MOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
 - ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)
.062(1.57)	.128 (3.25)	.120 +.015/-.025 (3.05 +.38/- .63)
.125(3.18)	.191 (4.85)	.205 +.015/-.025 (5.21 +.38/- .63)




CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
8	8	.350 (8.89)
8	6	.250 (6.35)
8	4	.150 (3.81)
8	2	.050 (1.27)

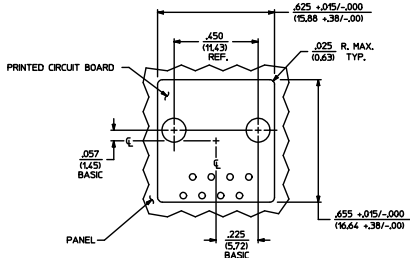

PANEL CUT-OUT FOR CONNECTOR SIZE 8

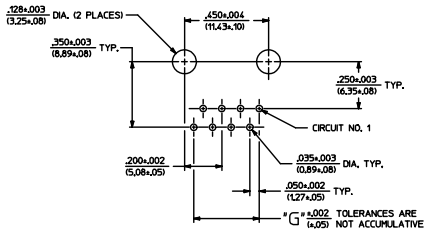

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 8
VIEWED FROM COMPONENT SIDE

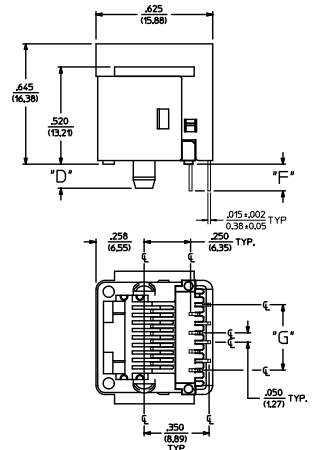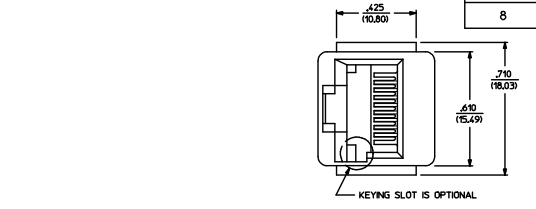

SIZE 8 MODULAR JACK LOADED WITH 8 TERMINALS SHOWN ABOVE
(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	mm	INCH	IN/MM	INCH			
▽=0	4 PLACES	±.010	DRAWN BY	DATE	4:1	INCH	ASSEMBLY; VERTICAL MODULAR JACKS
▽=0	3 PLACES	±.010	DLT	1990/10/12			
▽=0	2 PLACES	±.025	CHECKED BY	DATE			
▽=0	1 PLACE	±.050	DAP	1990/10/12			
▽=0	0 PLACE	±.100	APPROVED BY	DATE	molex		SHEET NO. 3 OF 4
ANGULAR ±1/2°			FSMITH	2012/02/14	DOCUMENT NO. SDA-42410-****		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
SEE SHEET 4 FOR PART NUMBER AVAILABILITY							
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

SIZE 4 VERTICAL MODJACK ASSEMBLIES					
PART CHARACTERISTICS					
ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION
42410-4368	4 POS. BODY	4	.062(1/57)	YES	A
42410-4370	↑	↑	.062(1/57)	NO	A
42410-4264	↑	↑	.125(3/16)	YES	A
42410-4266	4 POS. BODY	4	.125(3/16)	NO	A
42410-4312	4 POS. BODY	2	.062(1/57)	YES	A
42410-4314	↑	↑	.062(1/57)	NO	A
42410-4408	↑	↑	.125(3/16)	YES	A
42410-4440	4 POS. BODY	2	.125(3/16)	NO	A

SIZE 6 VERTICAL MODJACK ASSEMBLIES					
PART CHARACTERISTICS					
ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION
42410-6368	6 POS. BODY	6	.062(1/57)	YES	A
42410-6370	↑	↑	.062(1/57)	NO	A
42410-6264	↑	↑	.125(3/16)	YES	A
42410-6266	6 POS. BODY	6	.125(3/16)	NO	A
42410-6312	6 POS. BODY	4	.062(1/57)	YES	A
42410-6314	↑	↑	.062(1/57)	NO	A
42410-6320	↑	↑	.062(1/57)	YES	B
42410-6408	↑	↑	.125(3/16)	YES	A
42410-6440	6 POS. BODY	4	.125(3/16)	NO	A
42410-6456	6 POS. BODY	2	.062(1/57)	YES	A
42410-6458	↑	↑	.062(1/57)	NO	A
42410-6552	↑	↑	.125(3/16)	YES	A
42410-6554	6 POS. BODY	2	.125(3/16)	NO	A

SIZE 8 VERTICAL MODJACK ASSEMBLIES						
PART CHARACTERISTICS						
ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	KEYING OPTION	MOUNTING EARS OPTION	TERMINAL PLATING OPTION
42410-8312	8 POS. BODY	8	.062(1/57)	NO	YES	A
42410-8314	↑	↑	.062(1/57)	NO	NO	A
42410-8360	↑	↑	.062(1/57)	YES	YES	A
42410-8362	↑	↑	.062(1/57)	YES	NO	A
42410-8504	↑	↑	.125(3/16)	NO	YES	A
42410-8506	↑	↑	.125(3/16)	NO	NO	A
42410-8552	↑	↑	.125(3/16)	YES	YES	A
42410-8554	8 POS. BODY	8	.125(3/16)	YES	NO	A
42410-8600	8 POS. BODY	6	.062(1/57)	NO	YES	A
42410-8602	↑	↑	.062(1/57)	NO	NO	A
42410-8648	↑	↑	.062(1/57)	YES	YES	A
42410-8650	↑	↑	.062(1/57)	YES	NO	A
42410-8792	↑	↑	.125(3/16)	NO	YES	A
42410-8794	↑	↑	.125(3/16)	NO	NO	A
42410-8840	↑	↑	.125(3/16)	YES	YES	A
42410-8842	8 POS. BODY	6	.125(3/16)	YES	NO	A
42410-8888	8 POS. BODY	4	.062(1/57)	NO	YES	A
42410-8890	↑	↑	.062(1/57)	NO	NO	A
42410-8936	↑	↑	.062(1/57)	YES	YES	A
42410-8938	↑	↑	.062(1/57)	YES	NO	A
42410-9080	↑	↑	.125(3/16)	NO	YES	A
42410-9082	↑	↑	.125(3/16)	NO	NO	A
42410-9128	↑	↑	.125(3/16)	YES	YES	A
42410-9130	8 POS. BODY	4	.125(3/16)	YES	NO	A
42410-9176	8 POS. BODY	2	.062(1/57)	NO	YES	A
42410-9178	↑	↑	.062(1/57)	NO	NO	A
42410-9224	↑	↑	.062(1/57)	YES	YES	A
42410-9226	↑	↑	.062(1/57)	YES	NO	A
42410-9368	↑	↑	.125(3/16)	NO	YES	A
42410-9370	↑	↑	.125(3/16)	NO	NO	A
42410-9416	↑	↑	.125(3/16)	YES	YES	A
42410-9418	8 POS. BODY	2	.125(3/16)	YES	NO	A

SEE SHEET 1 EC No. IEP7205-2536 2015/07/24 ZDR/ANN/07EN CHK/BELL 2015/07/24 APRES/SM 2015/07/24 BEL	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	TITLE	DATE	FILE	
	∇=0	4 PLACES +--- +---	mm INCH	1:1	INCH	⊕	ASSEMBLY, VERTICAL MODULAR JACKS	1990/10/12		
	∇=0	3 PLACES +--- +---								
	∇=0	2 PLACES ±0.25 +---								
		1 PLACE +--- +---								
		0 PLACE ±								
		ANGULAR ±1/2°								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								
		SEE CHART								
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								