
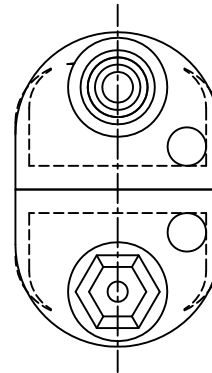
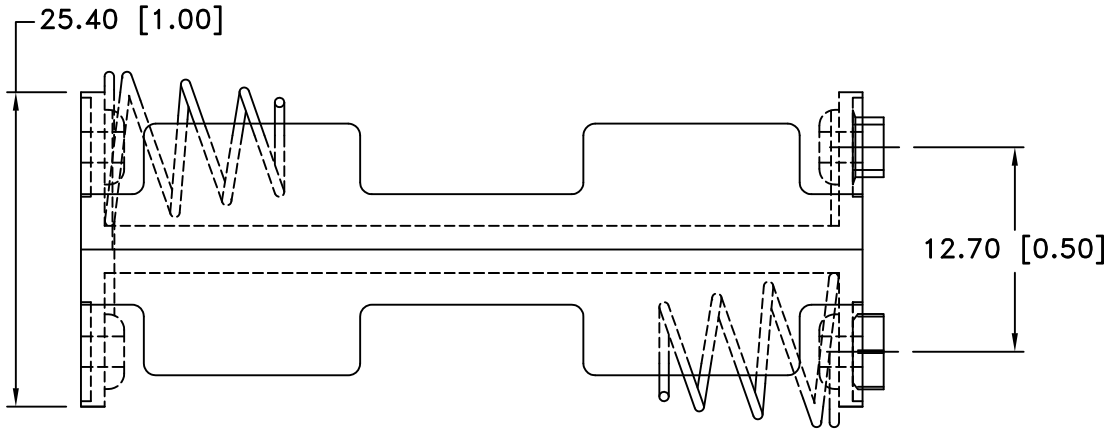



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--|------|------|-----|
| 5/05/07 | A | ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC. | T.B. | B.S. | |
| 10/10/14 | B | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

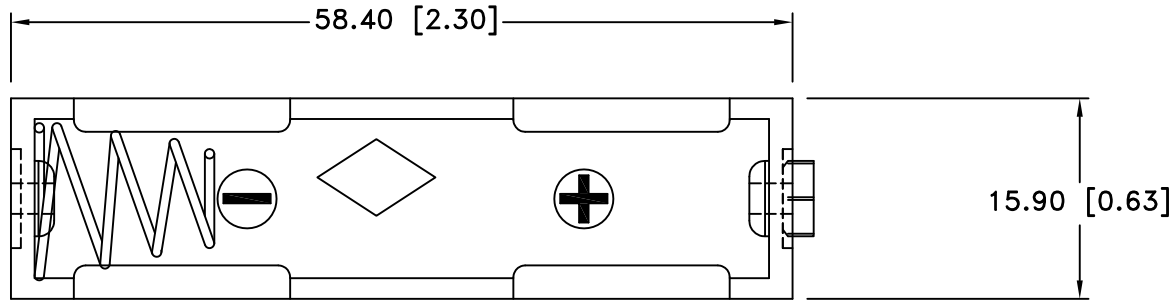

NOTES:

- Plastic material - Polypropylene, PP-1040
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Springs - Nickel Plated Spring Steel
- Rivets - Brass, Nickel Plated
- 9Volt Snaps - Brass, Nickel Plated
- Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|------------------|----------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By B.S. |
| | | | Approved By T.B. |
| decimal ±.5 (.020) | Title TWO "AA" CELL HOLDER WITH SNAP FASTENERS | | |
| Fractional ± .8 (.030) | | Date 10/10/14 | Drawing Number BC22AASF |
| Angular ± 3° | | | |