

## **Excellent Integrated System Limited**


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)  
[301-28-14-GR-0300F](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

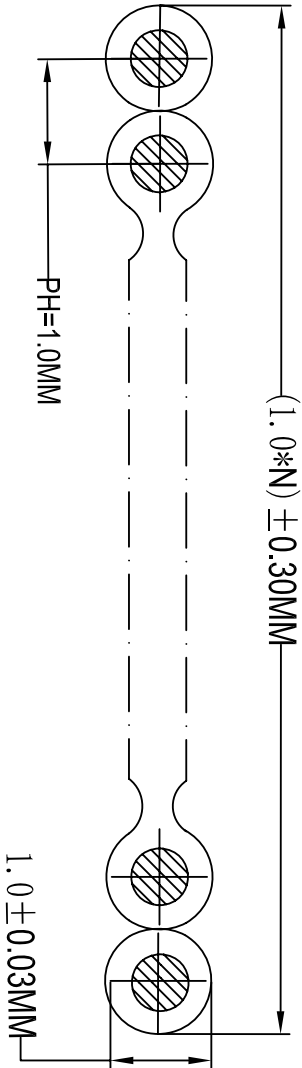

ITEM NO.	NO. of Core	Overall Diameter		Allowable error(mm)
		Thickness	Width	
301-28-05-GR-0300F	5	0.90±0.05	5.0	±0.30
301-28-08-GR-0300F	8	0.90±0.05	8.0	±0.30
301-28-09-GR-0300F	9	0.90±0.05	9.0	±0.30
301-28-10-GR-0300F	10	0.90±0.05	10.0	±0.30
301-28-14-GR-0300F	14	0.90±0.05	14.0	±0.30
301-28-16-GR-0300F	16	0.90±0.05	16.0	±0.30
301-28-20-GR-0300F	20	0.90±0.05	20.0	±0.30
301-28-24-GR-0300F	24	0.90±0.05	24.0	±0.30
301-28-25-GR-0300F	25	0.90±0.05	25.0	±0.30
301-28-26-GR-0300F	26	0.90±0.05	26.0	±0.30
301-28-30-GR-0300F	30	0.90±0.05	30.0	±0.30
301-28-34-GR-0300F	34	0.90±0.05	34.0	±0.30
301-28-40-GR-0300F	40	0.90±0.05	40.0	±0.30
301-28-44-GR-0300F	44	0.90±0.05	44.0	±0.30
301-28-50-GR-0300F	50	0.90±0.05	50.0	±0.30

**Conductor:**

AWG:28AWG  
 Material:TC  
 Conductor Size:7/Φ0.125±0.008MM

**Jacket:**

Min. Avg. Thick:0.26MM  
 Material:45P UL-PVC  
 Color:Grey (Half Atomizer)  
 Tensile Strength-before aging:1,500PSI  
 Tensile Strength-after aging:70% Min. (136 Elongating-before aging:100% Min Elongating-after aging:65% Min. (136° C\*16 Deformation Test:50% Max. (121° C\*1h) Cold Bent Test:-10° C\*4H No Cracking Horizontal Flame Test:VW-1

**Electrical:**

Rating:Temp 105° C  
 Voltage:300V  
 Dielectric Strength:2.0KV 60Hz Minute  
 Conductor Resistance:at 20° C Max:237.25  
 Insulation Resistance:100M/M Min.@500V DC  
 UL File No. E189529  
 UL Style:2651-VW-1

**CNC Tech,**  
 Industrial Cable and Connector

DRAWN BY	RIM	DRAWING NO.
CHECKED BY		CUSTOMER
APPROVAL BY		ITEM NO.
DECIDE BY		DATE
VERSIONS/EDITION	A/0	PROJECT