


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[301-28-44-GR-0300F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

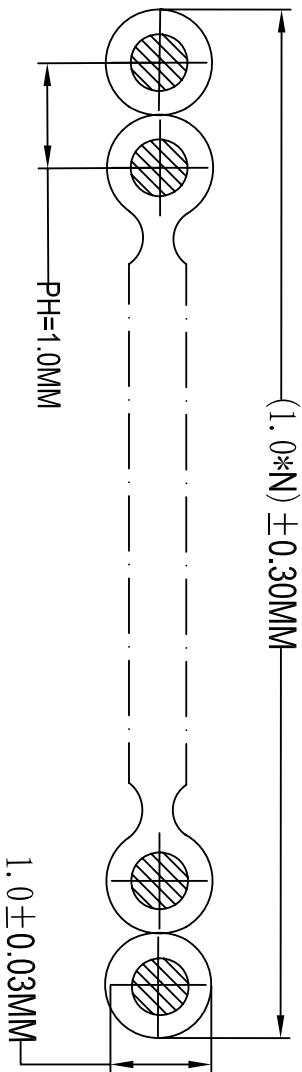

ITEM NO.	NO. of Core	Overall Diameter		Allowable error(mm)
		Thickness	Width	
301-28-05-GR-0300F	5	0.90±0.05	5.0	±0.30
301-28-08-GR-0300F	8	0.90±0.05	8.0	±0.30
301-28-09-GR-0300F	9	0.90±0.05	9.0	±0.30
301-28-10-GR-0300F	10	0.90±0.05	10.0	±0.30
301-28-14-GR-0300F	14	0.90±0.05	14.0	±0.30
301-28-16-GR-0300F	16	0.90±0.05	16.0	±0.30
301-28-20-GR-0300F	20	0.90±0.05	20.0	±0.30
301-28-24-GR-0300F	24	0.90±0.05	24.0	±0.30
301-28-25-GR-0300F	25	0.90±0.05	25.0	±0.30
301-28-26-GR-0300F	26	0.90±0.05	26.0	±0.30
301-28-30-GR-0300F	30	0.90±0.05	30.0	±0.30
301-28-34-GR-0300F	34	0.90±0.05	34.0	±0.30
301-28-40-GR-0300F	40	0.90±0.05	40.0	±0.30
301-28-44-GR-0300F	44	0.90±0.05	44.0	±0.30
301-28-50-GR-0300F	50	0.90±0.05	50.0	±0.30

Conductor:

AWG:28AWG
 Material:TC
 Conductor Size:7/Φ0.125±0.008MM

Jacket:

Min. Avg. Thick:0.26MM
 Material:45P UL-PVC
 Color:Grey (Half Atomizer)
 Tensile Strength-before aging:1,500PSI
 Tensile Strength-after aging:70% Min. (136 Elongating-before aging:100% Min Elongating-after aging:65% Min. (136° C*16 Deformation Test:50% Max. (121° C*1h) Cold Bent Test:-10° C*4H No Cracking Horizontal Flame Test:VW-1

Electrical:

Rating:Temp 105° C
 Voltage:300V
 Dielectric Strength:2.0KV 60Hz Minute
 Conductor Resistance:at 20° C Max:237.25
 Insulation Resistance:100M/M Min.@500V DC
 UL File No. E189529
 UL Style:2651-VW-1

CNC Tech,

Industrial Cable and Connector

VERSION/EDITION	A/0	PROJECT
DRAWN BY	RLM	DRAWING NO.
CHECKED BY		CUSTOMER
APPROVAL BY		ITEM NO.
DECIDE BY		DATE
VERSIONS/EDITION	A/0	PROJECT