

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[CNC Tech](#)
[710-10116-00500](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

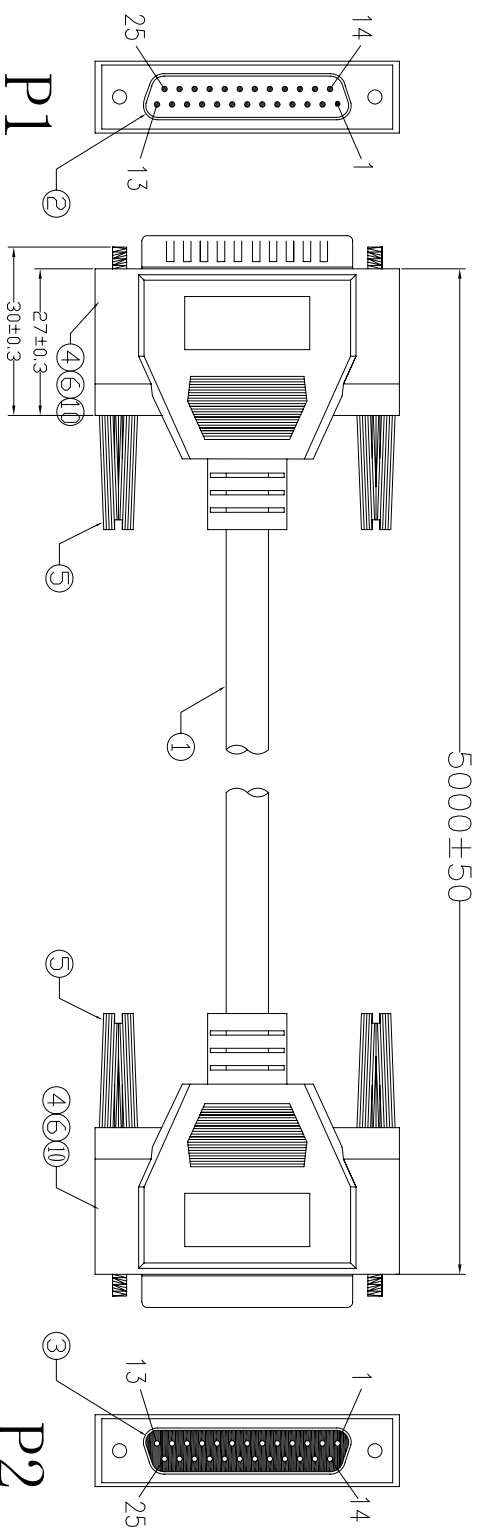

Electrical test:
1.100% short,open,miswire test
2.Conduct resistance:5 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.dielectric test:DC 300V

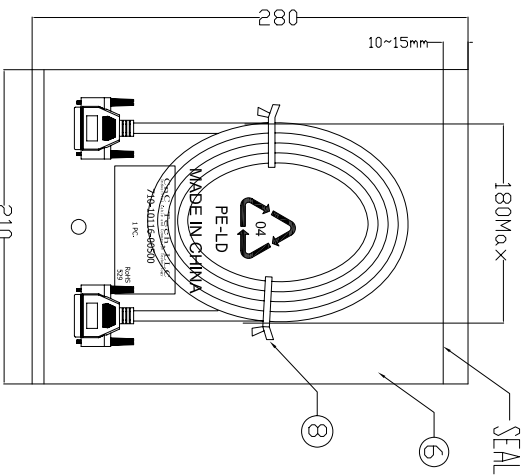

⑩	COPPER FOL	2	COPPER FOL W32mm*L100mm
⑨	TIE	2	WHITE L=200mm
⑧	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm PRINT BLACK MADE IN CHINA *1SPCS* 及印生产周期,有透气孔.
⑦	PE BAG	1	CLEAR SIZE: 210*280*0.05mm PRINT BLACK MADE IN CHINA *1PC* 及印生产周期,有透气孔.
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
⑤	SCREW	4	#4--40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS
④	IN JACKET OUT JACKET	18g 60g	CLEAR LD-PE (Mould NO.:NM-33) BEIGE(V-29) 40P PVC(Mould NO.WM-071)
③	CONN	1	DB 25P FEMALE SODER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
②	CONN	1	DB 25P MALE SODER TYPE PIN G/F SHELL NI-PLATED INSULATOR COLOR:BLUE
①	CABLE	1	UL20276 28AWG(7/0.12TC)*18P+D(26AWGTC)+AL/M+BRAD(85%) OD7.5mm JACKET:BEIGE(V-29) L=5000±20mm.
NO.	NAME	Q'TY	SPECIFICATION

PIN ASSIGNMENT	
P1	P2
1 棕	1 棕
18 棕/黑	18 棕/黑
2 红	2 红
19 红/黑	19 红/黑
3 橙	3 橙
19 橙/黑	19 橙/黑
4 黄	4 黄
20 黄/黑	20 黄/黑
5 绿	5 绿
20 绿/黑	20 绿/黑
6 蓝	6 蓝
21 蓝/黑	21 蓝/黑
7 紫	7 紫
21 紫/黑	21 紫/黑
8 白	8 白
22 白/黑	22 白/黑
9 粉红	9 粉红
22 粉红/黑	22 粉红/黑
10 棕/白	10 棕/白
24 红/白	10 红/白
11 橙/白	24 橙/白
23 黄/白	11 黄/白
12 绿/白	23 绿/白
24 蓝/白	12 蓝/白
13 紫/白	24 紫/白
24 浅灰/白	13 浅灰/白
14 红/棕	14 红/棕
25 黄/棕	14 黄/棕
16 绿/棕	16 绿/棕
25 蓝/棕	16 蓝/棕
15 紫/棕	15 紫/棕
23 棕/红	23 棕/红
17 浅灰/红	17 浅灰/红
25 DRAIN+BRAID	25 SHELL

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10116-005
DECIDE BY		DATE	2012-02-16

VERSIONS/EDITION	A/O	PROJECTION	
------------------	-----	------------	---