




Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)
[731-10064-00300](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

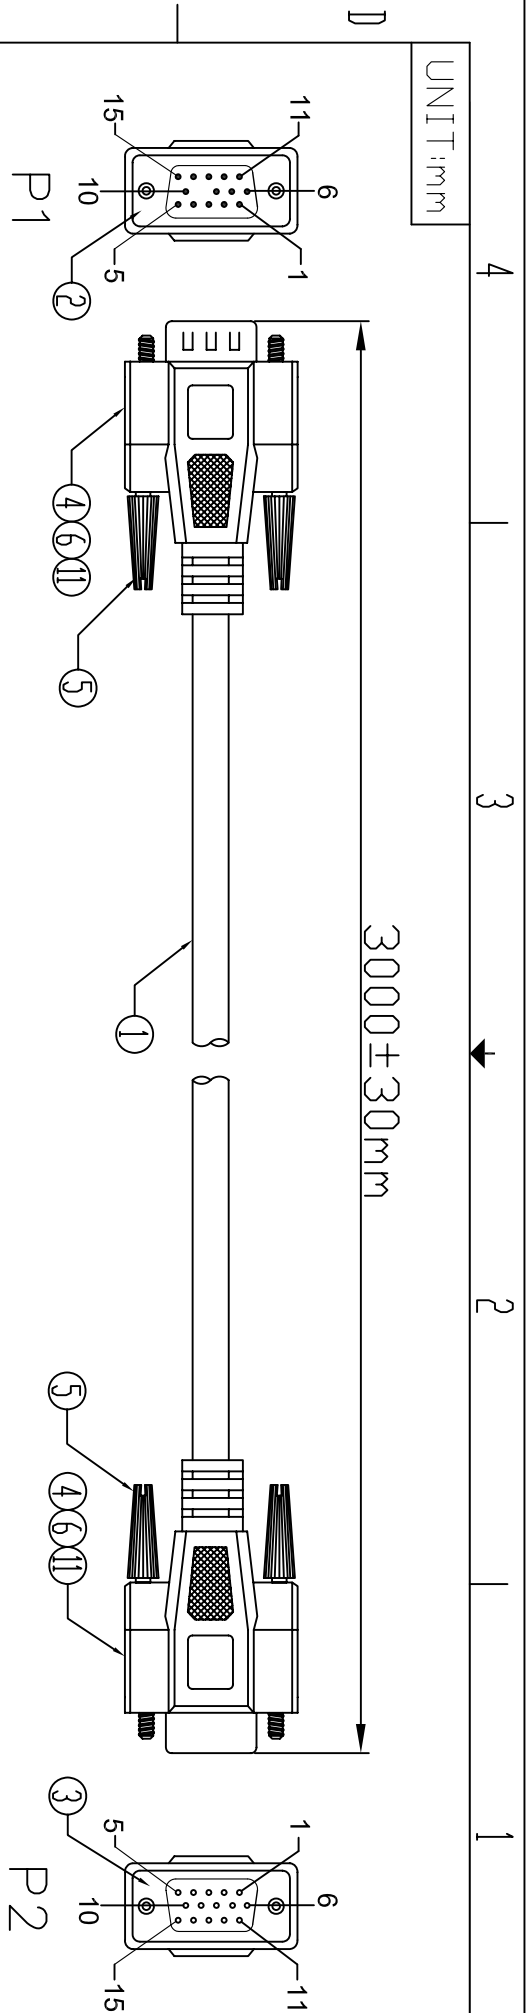

Electronic Test:
 1. 100% Test,(Open,Short,Miss Wire)
 2. Contact Resistance:3 ohm max.
 3. Insulation Resistance:20M ohm min.
 4. Hi-Pot:300V DC/10ms

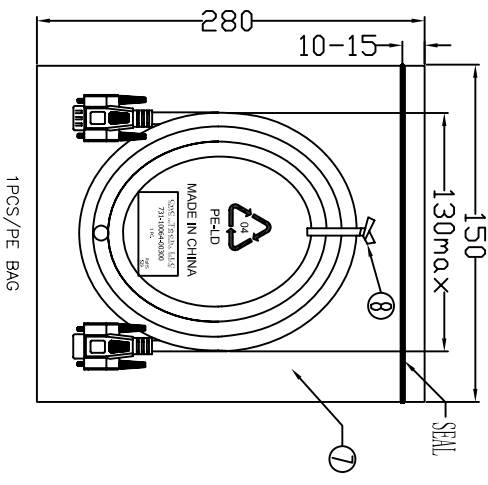

1PCS/PE BAG


PIN ASSIGNMENT

P1	P2
1 Red	1 1
2 GREEN	2 6
3 Blue	3 2
4 Brown	4 7
5 Black	5 3
6 ORANGE	6 8
7 WHITE	7 4
8 Brd	8 5
9 Shell	9 13
	10 14
	11 Shell

NO.	NAME	Q'TY	SPECIFICATION
①	TUBE	14	HEAT SHRINK TUBE BLACK OD1.5* L=15MM*2PCS,OD1.5* L=10MM*6PCS,OD3.0* L=8MM*6PCS,
②	PE BAG	1/5	CLEAR SIZE:360*380*0.05mm PRINT BLACK*MADE IN CHINA*+5PCS* 及印生产周期,有透气孔.
③	TIE	1	WHITE L=120mm
④	PE BAG	1	CLEAR SIZE:150*280*0.05mm PRINT BLACK*MADE IN CHINA* 及印生产周期,有透气孔.
⑤	COPPER FOIL	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL 18U" W25mm*1.55mm
⑥	SCREW	4	SCREW:#4-40UNC L4.7mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29)
⑦	OUT JACKET	43.5g	BEIGE(V-29) 40P PVC(MOULD NO:WM-113)
⑧	IN JACKET	8g	CLEAR LDPE(MOULD NO:NM-049)
⑨	CONN	1	HDD15P FEMALE/PIN G/F-SHELL-NICKEL,INSULATION COLOR:BLUE. SOLDER TYPE.
⑩	CONN	1	HDD15P MALE/PIN G/F-SHELL-NICKEL,INSULATION COLOR:BLUE. MISSING 9PIN SOLDER TYPE.
⑪	CABLE	1	UL2919 28AWG(1C+S)*3COAX(75 OHMS)+28AWG(7/0.125TC)+4C+AL/MY+DW(7/0.16TC)+B(24/6/0.12)+OUTTER JACKET COROL:BEIGE(V-29) OD:8.140.15mm. L=2999±10mm.

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	731-10064-00300
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	

4 3 2 1