

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1775619](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




**Extract from the online
catalog**

HC-B 16-EBUS 32

Order No.: 1775619

The illustration shows version HC-B 16-EBUS

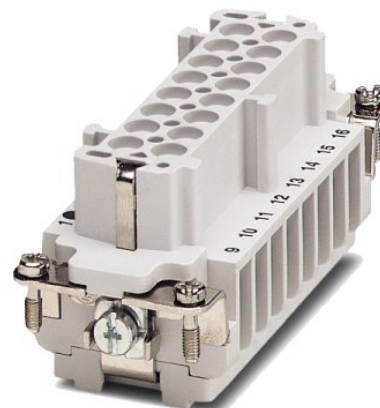

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775619>

HEAVYCON female insert, B16 series, 16-pos., screw connection,
numbering 17 ... 32

Commercial data

EAN	4017918038199
Pack	10 pcs.
Customs tariff	85366990
Weight/Piece	0.11158 KG
Catalog page information	Page 345 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
01/31/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Note	For HEAVYCON-ADVANCE housing of B16 type and HEAVYCON housing of B16/B32 type
Connection method	Screw connection
Tightening torque	0.5 Nm

HC-B 16-EBUS 32 Order No.: 1775619

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775619>

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
Pollution degree	3
Surge voltage category	III
Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Number of positions	16
Insertion/withdrawal cycles	≥ 500
Design	B16
Connection in acc. with standard	IEC / EN
Conductor cross section	0.5 mm² ... 2.5 mm²
Connection cross section AWG	20 ... 14
Stripping length of the individual wire	7 mm
Connection	For housings of type B16/B32. Connectors may only be actuated when there is no load/voltage.

Material data

Inflammability class acc. to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PA

Electrical characteristics

Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

Certificates / Approvals


Certification

GOST

HC-B 16-EBUS 32 Order No.: 1775619

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775619>

Accessories


Item	Designation	Description
------	-------------	-------------

General

1644326	HC-B-3PE	PE multiplier, for three PE connections, for HC-B (besides HC-B..E..ZZ) / HC-BB / HC-DD / HC-D40 / HC-D64 contact inserts
1604997	HC-B-PES	PE screw, for contact inserts HC-B / HC-BB / HC-DD / HC-D40 / HC-D64
1685327	HC-B-ZG	Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, straight cable exit
1685330	HC-B-ZS	Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, lateral cable exit
1772722	HC-CB	Coding pin, prevents mismatching of up to six plug connectors with an identical number of positions
1676860	HC-CBU	Keying socket for coding up to 16 plug connectors
1676857	HC-CST	Keying peg for coding up to 16 plug connectors
1687972	HC-SMR-B16	HEAVYCON connector assembly frame, for contact inserts of type B16

Diagrams/Drawings


Diagram

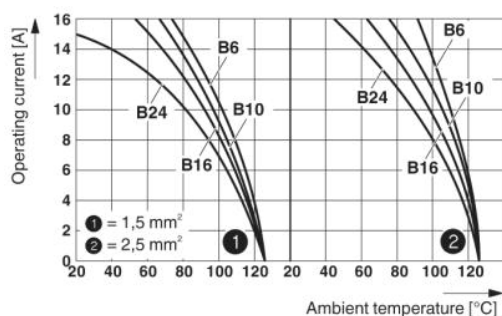

Derating diagram: Series HC-B...S / HC-B...C

Dimensioned drawing

Panel cutout

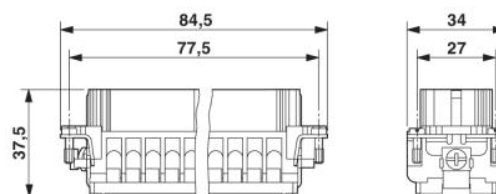


Female insert

HC-B 16-EBUS 32 Order No.: 1775619

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775619>

Schematic diagram

Connector pin assignment, connection side

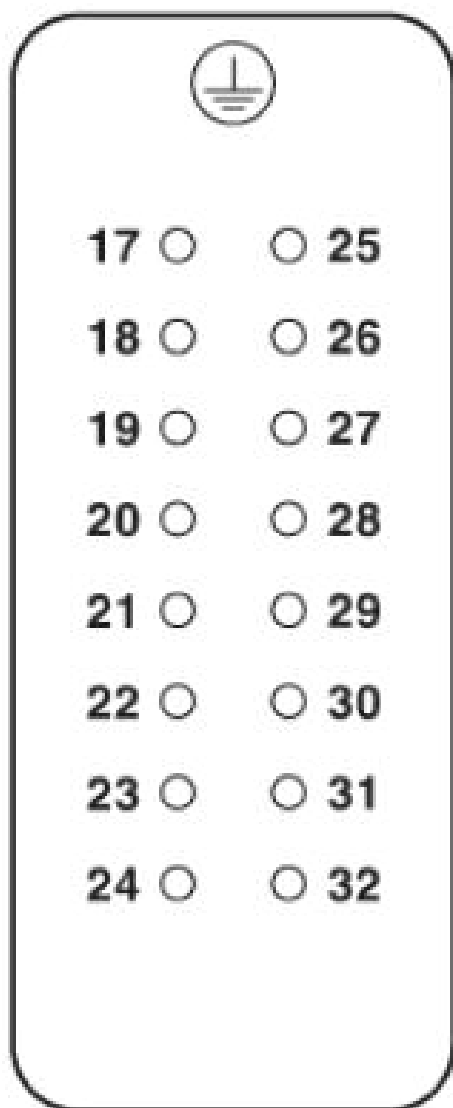

HC-B 16-EBUS 32 Order No.: 1775619

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1775619>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;