EM2416 Series EuroMag Terminal Blocks

Pluggable Block with Flanges (Mates with EM2426 Series); 7.62 Centers

SPECIFICATIONS

Rating: 16A, 300V

Center Spacing: 0.30" (7.62mm) Wire Range: #14-24 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Tin-Plated Brass Cage Material: Brass, Nickel-Plated Screw Size: M3.0 Zinc-Plated Steel

Operating Temperature: 105°C (221°F) max., -40°C

(-40°F) min.

Torque Rating: 5.0 lb-in.
Construction: Mold-to-Length

Agency Information: File E62622; CE Certified




EM241602

Poles L (mm) 2 24.90 3 32.50 4 40.10 5 47.80 6 55.40 7 63.00 8 70.60 9 78.20 10 89.90 11 93.50 12 101.10

To convert to inches, divide by 25.4

Dimensions - mm

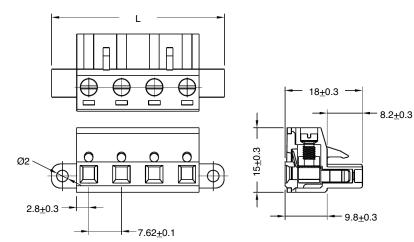

Part Numbering System

Series # of Poles Mating Header: EM2426 pg. 102

EM2416 ___

02 to **12**