

**Series EM2118 Series**

Pluggable Terminal Block with Flanges;  
(Mates with EM2218 Series); 5.08 Centers

**SPECIFICATIONS:**

**Rating:** 16A, 300V

**Center Spacing:** 0.20" (5.08mm)

**Wire Range:** #14-24 AWG

**Housing Material:** UL rated 94V0 Thermoplastic

**Contact Material:** Tin-Plated Phosphor Bronze


**Screw Size:** M 3x0 Nickel-Plated Steel

**Operating Temperature:** 105°C (221°F) max., -55°C (-67°F) min.


**Torque Rating:** 4.5 lb-in.

**Construction:** Mold-to-Length



**Agency Information:**  File E62622; CE Certified



EM211803H

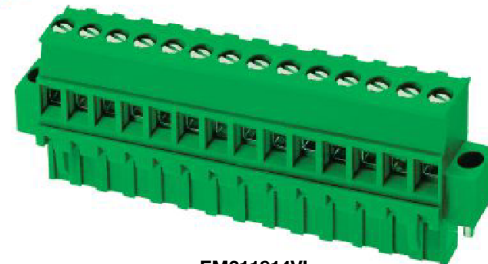

EM211814VL

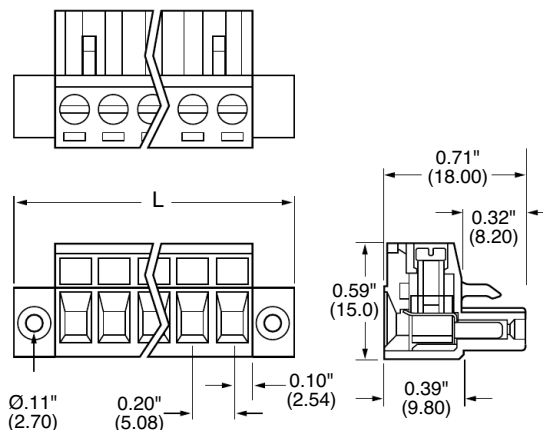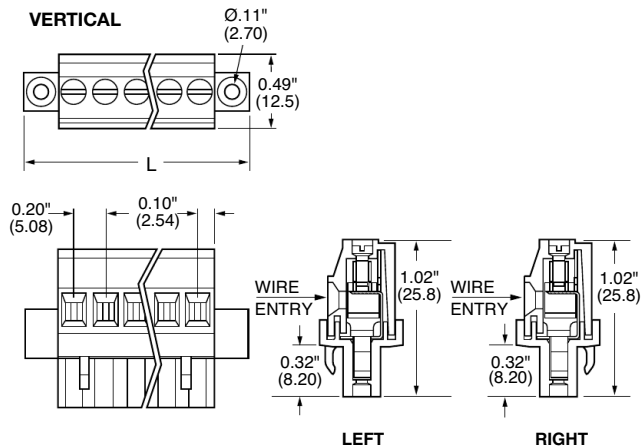**Dimensions - in (mm)****HORIZONTAL****VERTICAL**

| Poles | L (mm) | L (Inch) | Poles | L (mm) | L (Inch) |
|-------|--------|----------|-------|--------|----------|
| 2     | 20.32  | 0.8      | 13    | 76.20  | 3.0      |
| 3     | 25.40  | 1.0      | 14    | 81.28  | 3.2      |
| 4     | 30.48  | 1.2      | 15    | 86.36  | 3.4      |
| 5     | 35.56  | 1.4      | 16    | 91.44  | 3.6      |
| 6     | 40.64  | 1.6      | 17    | 96.52  | 3.8      |
| 7     | 45.72  | 1.8      | 18    | 101.60 | 4.0      |
| 8     | 50.80  | 2.0      | 19    | 106.68 | 4.2      |
| 9     | 55.88  | 2.2      | 20    | 111.76 | 4.4      |
| 10    | 60.96  | 2.4      | 21    | 116.84 | 4.6      |
| 11    | 66.04  | 2.6      | 22    | 121.92 | 4.8      |
| 12    | 71.12  | 2.8      |       |        |          |

**Part Numbering System**

Inches (Millimeters)

Series

EM2118

# of Positions

□□

02 to 22

Orientation

□

V - Vertical  
H - Horizontal

Mating Header: EM2218 pg. 98