

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1200650526](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

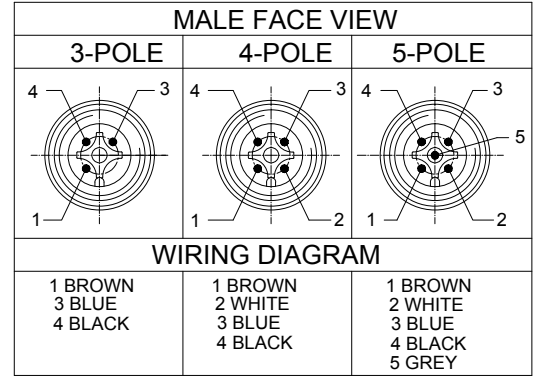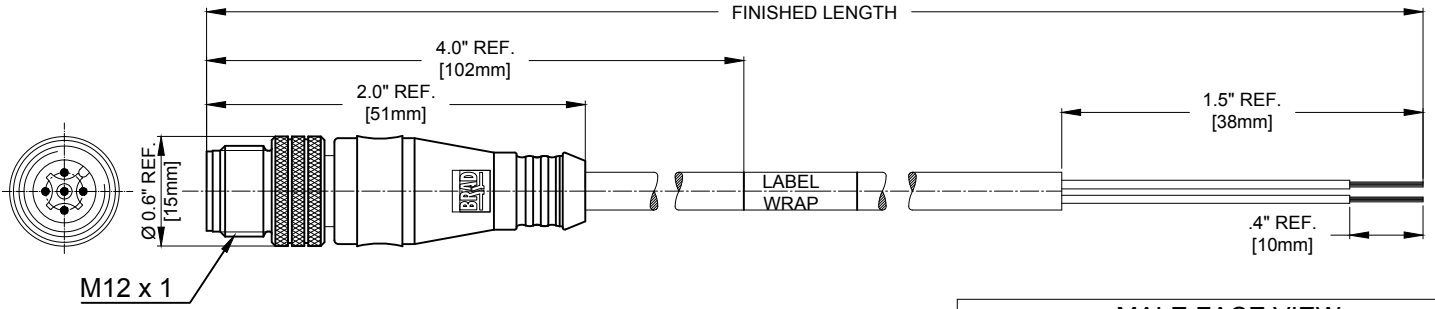

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY	RoHS COMPLIANT

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
INSERT	NYLON	BLACK
OVERMOLD	PUR	YELLOW
CABLE- 22/AWG CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

803006A09M020

no poles
3-5 pole

cable type
#22/3-5
PVC YELLOW

cable length
020----2 Meters
100----10 Meters

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200650200	803006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650414	804006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650523	805006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650533	805006A09M100	32.81" +12.5" -0 [10.0M +318 -0]

PRINTED FOR PART NUMBER MATRIX

EC NO: IFC2014-0588 1/28/15
 DRWN: GUSTAFS
 CHKD: TWOLLEGE
 APPR: ENCOBMAN 2010/01/25

QUALITY SYMBOLS
 ▽ = 0
 ▽ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
PLACES	TOLERANCE
4 PLACES ±	±.005
3 PLACES ±	±.010
2 PLACES ±	±.013
1 PLACE ±	±.020
ANGULAR ± .5°	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
GGUSTAFS	2013/11/26
CHECKED BY	DATE
RE	2010/01/21
APPROVED BY	DATE
NSTAUDIG	2010/01/25

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	INCH	
MICRO-CHANGE ASSEMBLY 3-5 POLE MA STR 22/AWG YELLOW PVC CABLE		
MOLEX INCORPORATED		SHEET NO. 1 OF 1
MATERIAL NO. SEE CHART DOCUMENT NO. SD-120065-028		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION