

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1200650531](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

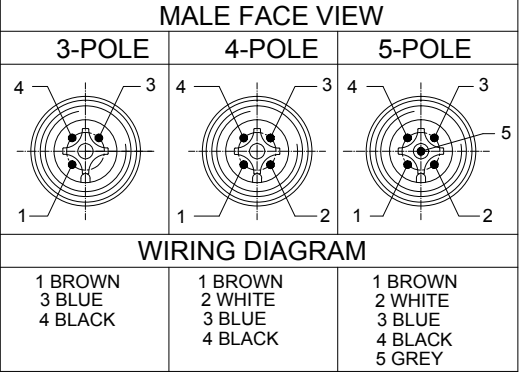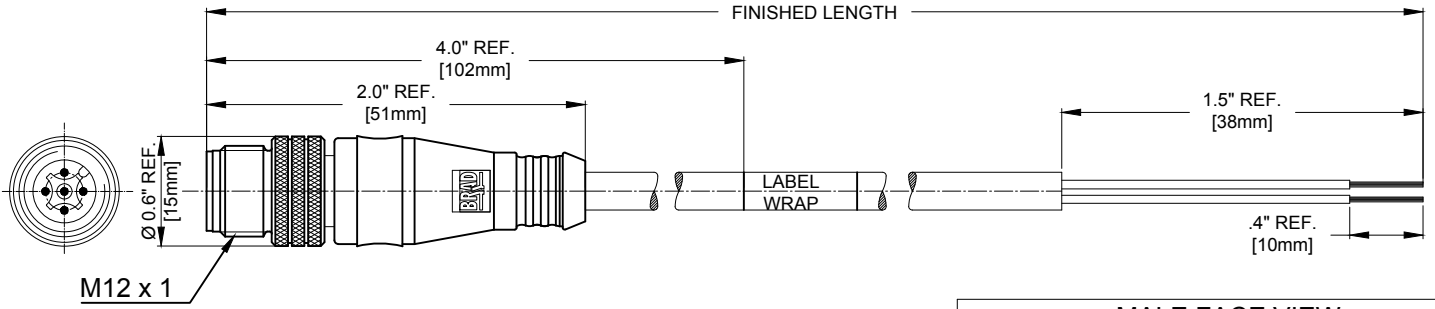

803006A09M020

no poles 3-5 pole
cable type #22/3-5 PVC YELLOW
cable length 020----2 Meters 100----10 Meters

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY	RoHS COMPLIANT

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200650200	803006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650414	804006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650523	805006A09M020	6.56" +3.5" -0 [2.0M +89 -0]
1200650533	805006A09M100	32.81" +12.5" -0 [10.0M +318 -0]

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
INSERT	NYLON	BLACK
OVERMOLD	PUR	YELLOW
CABLE- 22/AWG CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

PRINTED FOR PART NUMBER MATRIX
EC NO: IPC2014-0588 1/28/15
DRAWN: GGGUSTAFS
CHECKED: TWOLLEGE
APPROVED: BOWMAN 2010/01/25
DESCRIPTION: MICRO-CHANGE ASSEMBLY

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
▽ = 0	4 PLACES ± .13 ± .010	DRAWN BY DATE GGGUSTAFS 2013/11/26	MICRO-CHANGE ASSEMBLY		
▽ = 0	3 PLACES ± .13 ± .010	CHECKED BY DATE RE 2010/01/21	3-5 POLE MA STR		
▽ = 0	2 PLACES ± .13 ± .010	APPROVED BY DATE NSTAUDIG 2010/01/25	22/AWG YELLOW PVC CABLE		
▽ = 0	1 PLACE ± .25 ± .020	MATERIAL NO. DOCUMENT NO. SD-120065-028	MOLEX INCORPORATED		
▽ = 0	ANGULAR ± .5°	SIZE A3	SHEET NO. 1 OF 1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					