

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Alpha Wire](#)  
[FITFAB-10 BK005](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


# **FIT** Preferred Heat Shrink Products

## **HIGHLY FLEXIBLE, HEAT SHRINKABLE WOVEN FABRIC TUBING**

**FIT** FABRIC

### CHOOSE **FIT** FABRIC FOR:

- Superior Abrasion Resistance over a Wide Temperature Range
- Outstanding Flexibility and Durability
- Tight Grip without Additional Fixing
- Ease of Installation
- Resistance to Harsh Environments
- Soft, Safe Handling
- Cuts with Scissors

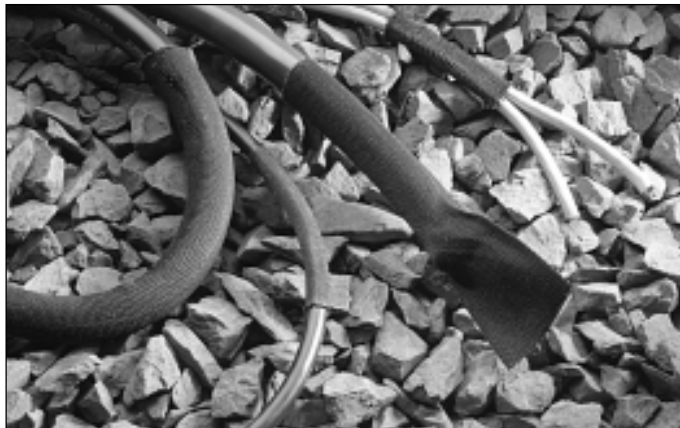

### **FIT** FABRIC APPLICATIONS:

- Mechanical Abrasion Protection
- Severe Environment Protection
- Noise and Rattle Protection
- Halogen Free Environment
- Flexing Applications

**2 TO 1** SHRINK RATIO

**3 TO 1** SHRINK RATIO

*New!*

### CHARACTERISTICS

#### OPERATING TEMPERATURE:

- -40°C to 125°C

#### SHRINKAGE RATIO:

- Approximately 2 to 1 or 3 to 1 at 135°C Depending on Size

#### COLOR DESCRIPTION:

- All Standard Packages: Black


#### PHYSICAL PROPERTIES:

- Longitudinal Shrinkage:  
Up to 20% @ 2:1 Shrink Ratio  
Up to 25% @ 3:1 Shrink Ratio
- Flammability: Meets MVSS 302 Horizontal Burn Test

#### CHEMICAL PROPERTIES:

- Corrosive Effect: Non-Corrosive
- Fungus Resistance: No Growth
- Chemical Resistance: Antifreeze (50% Ethylene Glycol), Engine Oil, Mineral Hydraulic Fluid, Detergent (1% Teepol), Brake Fluid (DOT 4), Unleaded Gasoline, Diesel Fuel, Battery Acid

Alpha Part No.	Approx. Shrink Ratio	Minimum Supplied I.D.		Maximum Rec. I.D.		Non-Rec. Wall Thickness		Total Ftg.	Std. Spools Total Ftg.
		Inches	mm	Inches	mm	Inches	mm		
<b>FIT FAB-1</b>	2 to 1	0.47	12,0	0.24	6,0	0.039	0,99	50	200
<b>FIT FAB-2</b>	2 to 1	0.79	20,0	0.39	10,0	0.039	0,99	50	200
<b>FIT FAB-3</b>	2 to 1	1.18	30,0	0.59	15,0	0.039	0,99	50	200
<b>FIT FAB-4</b>	2 to 1	1.57	40,0	0.79	20,0	0.039	0,99	50	200
<b>FIT FAB-5</b>	2 to 1	1.97	50,0	0.98	25,0	0.039	0,99	25	100
<b>FIT FAB-6</b>	2 to 1	2.36	60,0	1.18	30,0	0.039	0,99	25	100
<b>FIT FAB-7</b>	2 to 1	2.76	70,0	1.38	35,0	0.039	0,99	25	100
<b>FIT FAB-8</b>	3 to 1	0.71	18,0	0.24	6,0	0.039	0,99	50	200
<b>FIT FAB-9</b>	3 to 1	1.18	30,0	0.39	10,0	0.039	0,99	50	200
<b>FIT FAB-10</b>	3 to 1	2.36	60,0	0.79	20,0	0.039	0,99	25	100

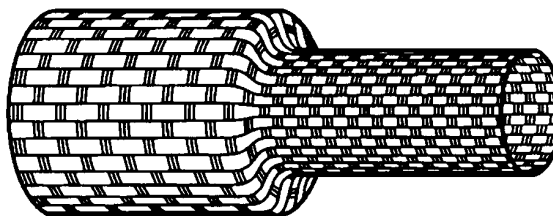

### SPECIFICATIONS

- MVSS 302 Horizontal Burn Test

