

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[1201140088](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

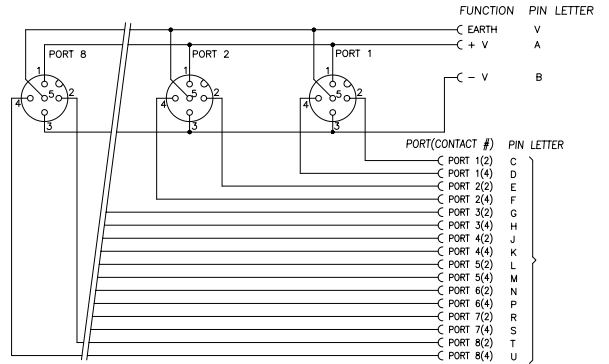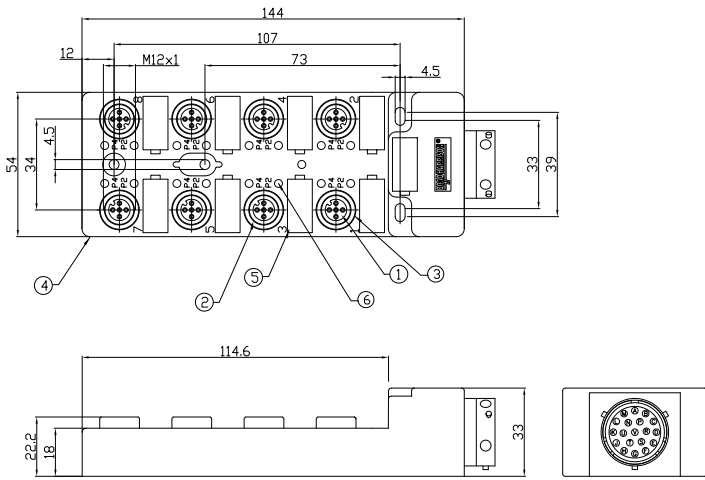

MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1201140088	BTY8030-F BK	-

VOLTAGE RATING	75V
AMPERAGE RATING PER PORT	2 AMPS PER PORT TO 12 AMP MAX.
PROTECTION	IP67
OPERATING TEMPERATURE	-25°C TO 90°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E46237
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
2	O-RING	VITON	RED
3	RECEPTACLE SHELL	BRASS	NICKEL PLATED
4	HOUSING	PBT	YELLOW
5	LABEL	ABS	WHITE
6	LENS	NYLON	CLEAR

DESCRIPTION EC NO: WEU2010-0451 DRWN: LSTEMMLE 2010/03/22 CHKD: INSTALDIG APPR: FPACHER 2010/03/23 REV: 1	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± mm ± INCH 3 PLACES ± mm ± INCH 2 PLACES ± mm ± INCH 1 PLACE ± 0.3 mm ± INCH ANGULAR ± °	DIMENSION STYLE MM ONLY	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWN BY: LSTEMMLE DATE: 2010/03/22 CHECKED BY: FPACHER DATE: 2010/03/23 APPROVED BY: FPACHER DATE: 2010/03/23	MATERIAL NO. SD-120114-085	DOCUMENT NO. SD-120114-085	SHEET NO. 1 OF 1

MICRO-CHANGE MPIS
 TOP MOUNT 8 PORT
 19P PLASTIC BURNDY CONN.
MOLEX INCORPORATED
 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION