

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Cherry](#)
[MP102103](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Magnetic Proximity Sensors (Hall Effect)

MP1021 Sensors

Digital Hall-effect position sensor in low-profile flange-mount housing



Description

The MP1 Series sensors are one-piece non-contact solid-state position sensors. The sensors operate through the use of Hall Effect technology with magnetic fields generated by permanent magnets. They provide a sinking current output.

Features

- Solid state reliability
- Flange-mount housing
- Stable output over operating temperature range
- Compatible with unregulated power supply
- Open collector (NPN) output can be used with bipolar or CMOS logic circuits with suitable pull-up resistor
- North pole sensitive
- Unipolar device (MP102101, MP102102, MP102103)
- Latching versions available (MP102104, MP102105, MP102106)
- RoHS compliant
- IP67

Typical Applications

- Door position & interlock
- Limit switch
- Flow/speed
- Home security
- Pedal switch

Environmental Specifications

Operating Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Ingress Protection	IP67

Electrical Specifications

Operating Supply Voltage	4.5 to 24 VDC
Supply Current	2.5 mA typ., 5 mA max.
Output Current (Sink)	25 mA max.
Maximum Reverse Voltage	30 VDC
Recommended Pull-Up Resistor	See chart

Mechanical Specifications

Housing Material	Glass-reinforced plastic
Turn on / off (MP102101, MP102102, MP102103)	300 Gauss / 95 Gauss
Turn on / off (MP102104, MP102105, MP102106)*	60 Gauss / 60 Gauss

*MP102104, MP102105, MP102106 are latching sensors and release when 60 Gauss is applied to the south pole

Products

Part Number	Sensing Location	Termination
MP102103	C	24 AWG x 314 mm
MP102101*	A	24 AWG x 314 mm
MP102102*	B	24 AWG x 314 mm
MP102104*	A	24 AWG x 314 mm
MP102105*	B	24 AWG x 314 mm
MP102106*	C	24 AWG x 314 mm


*Not commonly stocked; please contact the factory or your distributor

Note: An external pull-up resistor is required, the value of which is dependent on the supply voltage. The resistor should be connected between the output and Vcc. Refer to the wiring diagram for lead colors or pin numbering as applicable.

Recommended External Pull-Up Resistor

Volts DC	5	9	12	15	24
Ohms	1k	1.8k	2.4k	3k	3k

Open Collector Sinking Block Diagram

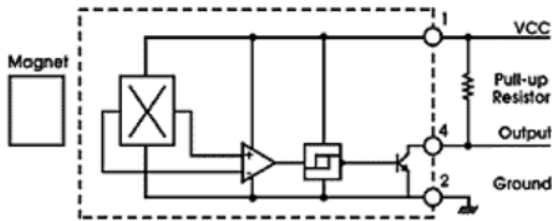

PLEASE NOTE 
CHERRY
 will become
ZF in 2017.

Dimensions mm (inches)

