

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)
[CA08COME20-29S44](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

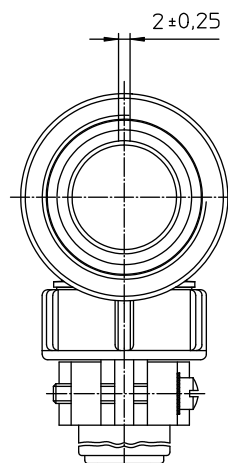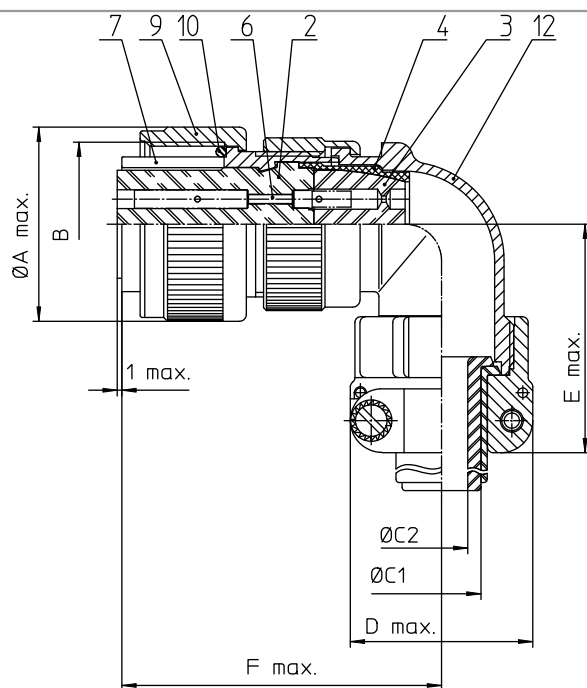

NO.	MASSE / DIMENSION
A	37,4
B1	1 1/4-18UNEF-2A
B2	15,9
C	-
D	37,5
E	53
F	61

NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
12	ENDGEHÄUSE / ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Nickel plated
Insulator Material:	CR-Elastomere
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm
Dimensions without tolerance indications are general tolerances in acc. with DIN 1680

drawing for	
CUSTOMER	
 ITT <i>Engineered for life</i> ITT Cannon GmbH 11111 Cannon Drive Cannon, VA 22020-1111	description
	CA08COM-E20-29S-44
	Plug 90°
	Endbell with female and grommet
© All rights reserved. Reproduction or use in any form without the prior written permission of ITT Cannon is prohibited.	Solder Cup / Socket / Layout: 20-29
page	revision
1/1	480 3. Jul 16