

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Easy Braid Co. EBM7DS526H


For any questions, you can email us directly: sales@integrated-circuit.com





EBM7DS526H Datasheet

Technical Specifications

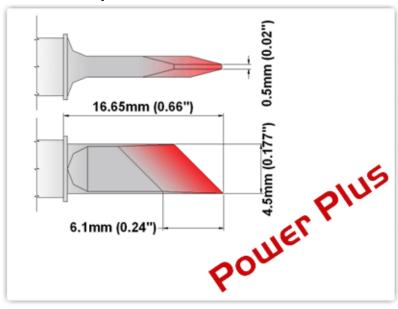

EBM7DS526H

Knife 4.50mm (0.177"), Increased Tin Area 6.1mm (0.24"), Power Plus

Tip Style: Knife

Tip Width: 4.50mm (0.18")
Tip Length: 16.65mm (0.66")


700 Type Cartridge¹: 350°C - 398°C

RoHS Compliant² / Lead Free: YES

For Use With: EB-9000S, EB-9000S-2, MX500 and MX5000

Material Composition



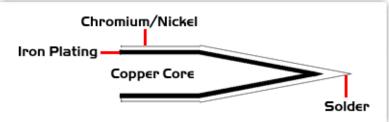



Easy Braid Co. tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Easy Braid Co. offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method, technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

Copyright © 2010-2012 Easy Braid Co. All Rights Reserved

Please refer to http://www.rohs.gov.uk for details on RoHS Compliance.