

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)
[500SDP1S1M2REA](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

SHEET 1 OF 1

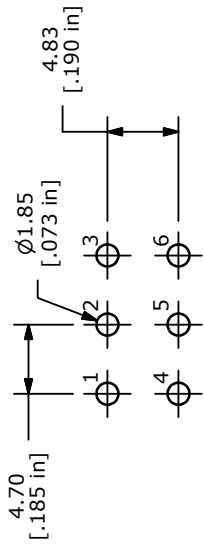





PC MOUNTING

SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
ON	ON	NONE	ON
2-1, 5-4	N/A	2-3, 5-6	



CIRCUIT: DPDT

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - PLATING MATERIAL: GOLD
 - CONTACT RATING: .4VA@20V (AC or DC)
 - TRAVEL: 2.16mm
 - ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
 - CONTACT RESISTANCE: 10 milli-OHMS TYP.
 - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 - OPERATING TEMP.: -30°C to 85°C
 - ▲ DENOTES CRITICAL PARAMETER.
 - 2002/95/EC (ROHS) COMPLIANT

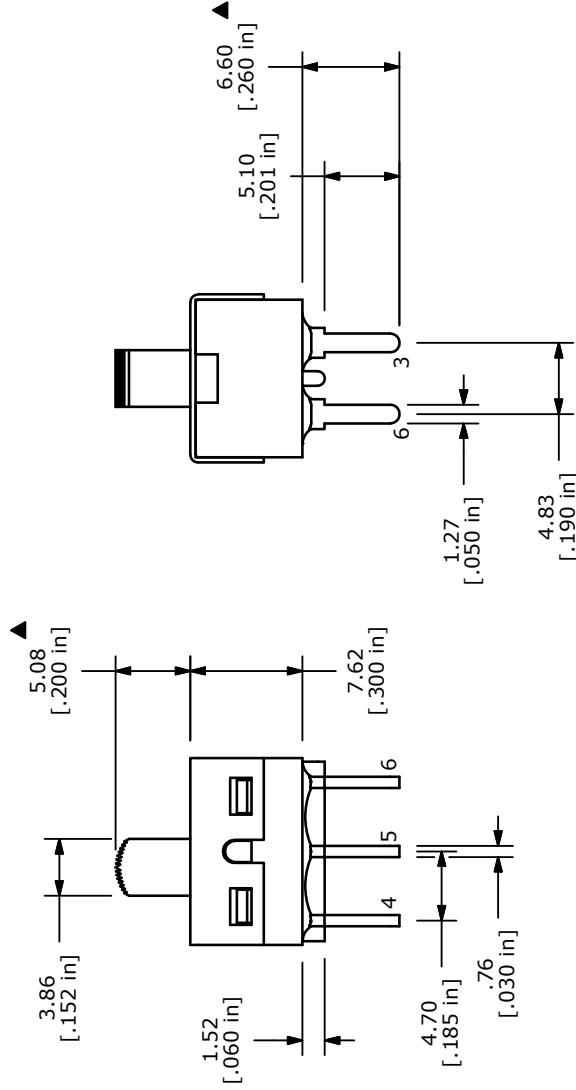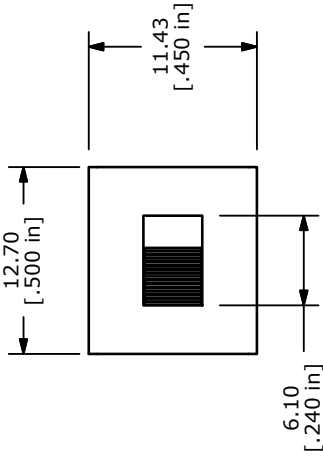

TITLE 500SDP1S1M2REA

SCALE 2:1

DATE 1/7/2011

DR BGL

DWG T521003

REV C

C	19567	DRAWING UPDATE / CLEAN-UP	1/7/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				