

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Wurth Electronics Midcom](#)
[760390014](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes	Yes

ORDER FROM YOUR SUPPLIER



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.31 ohms max.
D.C. RESISTANCE	6-4 @20°C	0.37 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Is	475uH min.
DIELECTRIC	1-6 3125VAC, 1 second	2500VAC, 1 minute
URNS RATIO	(6-4):(1-3)	1.3:1, ±2%

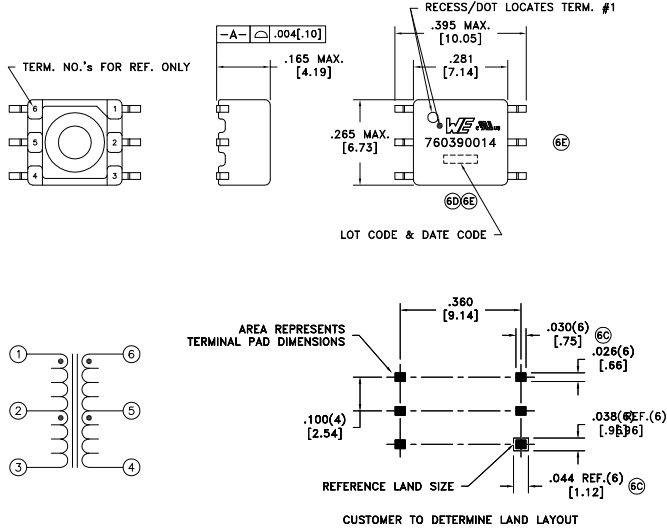

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C.

CURRENT RATING: 150mAAC

VOLTAGE-TIME: 11VuS

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Functional insulation for a primary circuit at a working voltage of 400Vrms.

Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

60

AGENCY NUMBER	
UL60950-1	E205930
CSA60950-1 (Via CUL)	E205930

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [13] Footprint: ±.005 [13]	DRAWING TITLE	PART NO.
6E	6/16	Method: Tape & Reel PKG-0895			TRANSFORMER	760390014
6D	10/13	www.we-online.com/midcom			eiSos p/n: 760390014	
6C	6/13					
6B	2/13	SEE REVISION SHEET FOR REVISION LEVEL				



SPECIFICATION SHEET 1 OF 1