



Distributor of CTS Electronic Components: Excellent Integrated System Limited

Datasheet of RT1200B7TR7 - RES NTRK 16 RES 10 OHM 32LBGA

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CTS Electronic Components](#)

[RT1200B7TR7](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



CompactPCI Terminator

Technical Data Sheet

RoHS Compliant Parts Available

Description

This CompactPCI termination network provides high performance resistor termination for high-speed data busses.



Designed with a ceramic substrate, this device minimizes channel capacitance, a primary cause of reduced system performance. In addition, the BGA package eases routing design, saving the designer many hours of printed circuit layout.

The BGA packaging has been proven to reduce rework and improve reliability.

Features

- 16 or 32 Bit Terminators
- Ultra Low I/O Coupling
- Slim BGA Package
- 10 Ohm Trimmed Resistance to 5%
- RoHS Compliant Designs Available
 - Compatible with both lead and lead-free manufacturing processes

Style C

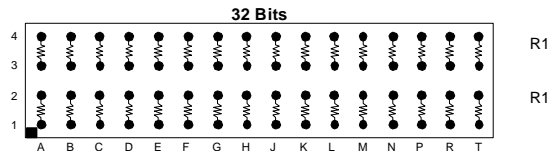


Electrical Specifications

Resistor Tolerance:	± 5.0%
TCR	± 200ppm/°C
Operating Temperature Range	-55°C to +125°C
Maximum Resistor Power:	0.05 Watts at 70°C
Maximum Package Power:	1.0 Watts at 70°C
Process Requirements:	
Maximum Re-flow Temperature	Per IPC/JEDEC J-STD-020C

Typical Application

DRAM Series Termination for Address Lines

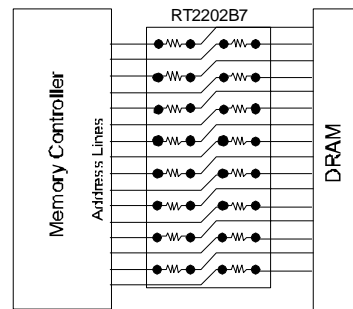

Ordering Information

Standard Part Numbers	Style	R1 Ω	Bits	Array Size	RoHS Part Numbers
RT1200B7	C	10	16	4 x 8	RT2200B7
RT1201B7	C	10	32	4 x 16	RT2201B7

Refer to the following link for detailed Top Side Probe-able information:
www.ctscorp.com/components/clearone/TopProveClearOne.pdf

Packaging Information


Suffix	TR7	TR13
Tape Width	24 mm	24mm
Carrier Pitch	8 mm	8 mm
Reel Diameter	7 inch	13 inch
Parts/Reel	1,000	4,000

Part Number Coding


7 inch reel, Add TR7 to part number, example RT2200B7TR7

13 inch reel, Add TR13 to part number, example RT2200B7TR13

(Bulk packaging is not available)




Recommended Land Pattern

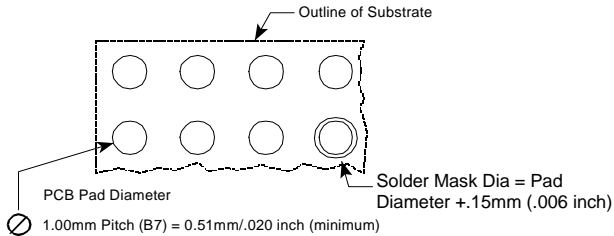


For .006" Thick Solder Paste Stencil, Aperture Opening Should be Equal to the PCB Pad Diameter.
 Refer to www.ctscorp.com/components/clearone.asp for additional PCB design information

BGA Routing Scheme

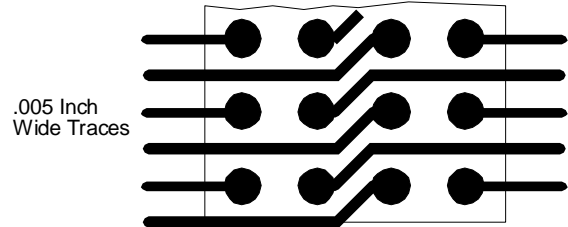

Top Side Probe-able Information




Top Side Probe-able Probe Pad 4x8 Array Shown

Refer to Top Probe-able Application Notes for additional information.


Note: Add a 'P' suffix to order Top Side Probe-able version.
 Example: RT1201B7PTR7.

Refer to the following link for detailed Top Side Probe-able Information:
www.ctscorp.com/components/clearone/TopProveClearOne.pdf

DIM METRIC/ENGLISH	"PITCH SUFFIX"	
	B6	B7
"A"	0.64/.025	0.50/.020
"B"	1.27/.050	1.00/.039
"C"	0.64/.025	0.50/.020
"D"	0.66/.026	0.50/.020
"E"	0.71/.028	0.28/.011
"F"	0.66/.026	0.66/.026



Mechanical Diagram

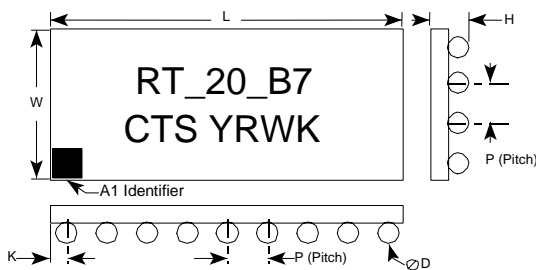

	1.00 mm Pitch	L	W	H	P	D	K
RT1200B7	mm	8.00±0.15	4.00±0.15	1.19±0.15	1.00±0.25	0.64±0.05	0.50±0.25
RT2200B7	inch	.315±.006	.157±.006	.047±.006	.039±.010	.025±.002	.020±.010
RT1201B7	mm	16.00±0.15	4.00±0.15	1.19±0.15	1.00±0.25	0.64±0.05	0.50±0.25
RT2201B7	inch	.630±.006	.157±.006	.047±.006	.039±.010	.025±.002	.020±.010

Complete ClearONE Product, Processing, and Application Information can be found at the following link:

<http://www.ctscorp.com/components/clearone.asp>