

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sumida Corporation](#)
[CDRH8D28HPNP-3R3NC](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

SMD Power Inductor CDRH8D28HP



**Halogen
Free**



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.3 × 8.3 × 3.0 mm Max.
- Product weight: 0.57g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 1000pcs per reel


Applications

- Ideally used in Notebook PC, Game machine, HDD, DVC, LCD TV etc as DC-DC converter inductors.

Dimension - [mm]

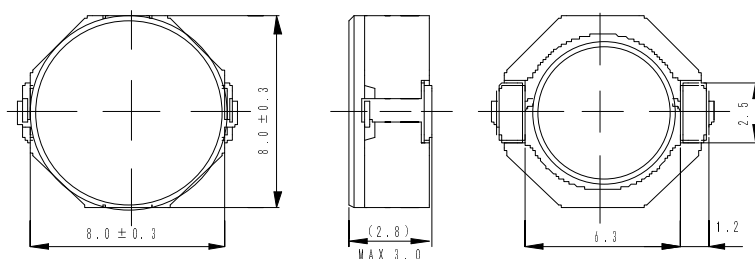

Land pattern and Schematics - [mm]

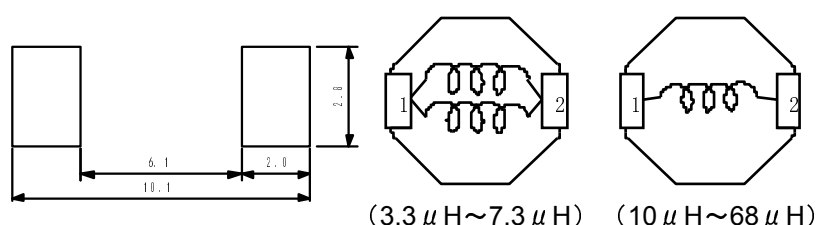

Electrical Characteristics

Part Name	Stamp	Inductance (μH) [within] ※1	D.C.R. (mΩ) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
				at 20°C	at 100°C	
CDRH8D28HPNP-3R3NC	3R3H	3.3 ± 30%	35(27)	6.50	4.60	3.80
CDRH8D28HPNP-4R7NC	4R7H	4.7 ± 30%	40(31)	4.50	3.60	3.60
CDRH8D28HPNP-7R3NC	7R3H	7.3 ± 30%	66(51)	4.00	3.10	2.40
CDRH8D28HPNP-100NC	100H	10 ± 30%	78(60)	3.40	2.50	2.10
CDRH8D28HPNP-150NC	150H	15 ± 30%	125(96)	2.80	2.30	1.70
CDRH8D28HPNP-220NC	220H	22 ± 30%	182(140)	2.50	1.90	1.35
CDRH8D28HPNP-330NC	330H	33 ± 30%	286(220)	1.90	1.60	1.10
CDRH8D28HPNP-470NC	470H	47 ± 30%	345(265)	1.60	1.36	1.00
CDRH8D28HPNP-680NC	680H	68 ± 30%	520(400)	1.30	1.10	0.80

※1. Inductance measuring conditions at 100kHz.

※2. Saturation current: The DC current at which the inductance decreases to 65% of its nominal value.










※3. Temperature rise current: The DC current at which the temperature rise is Δt=40°C.(Ta=20°C)

SMD Power Inductor CDRH8D28HP



Saturation Current & Temperature Rise Graph



— L (20°C) — L (100°C) — ΔT

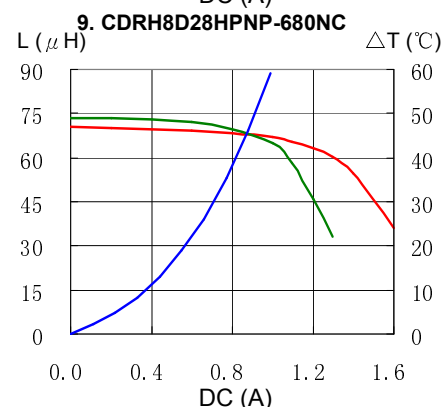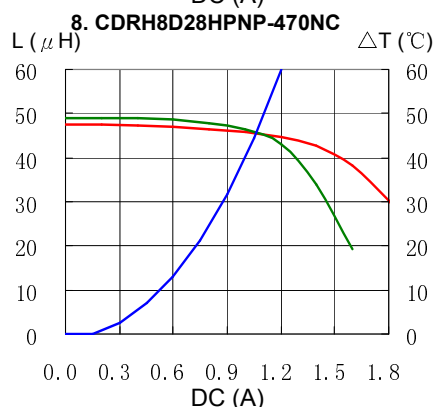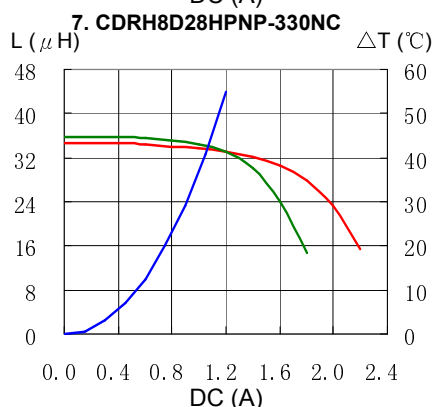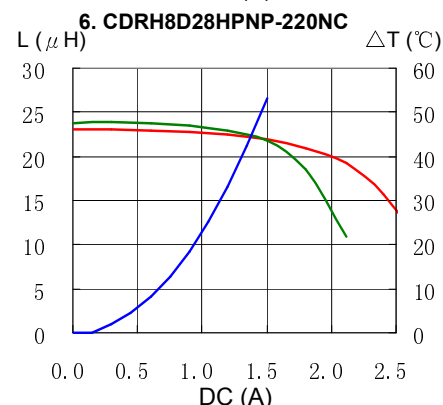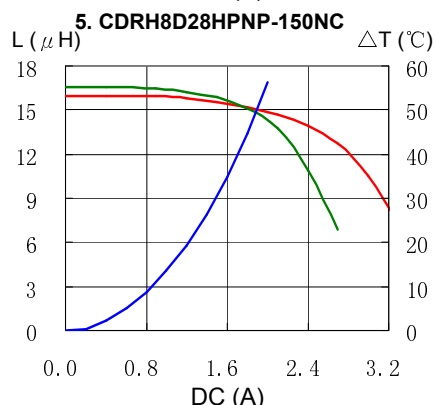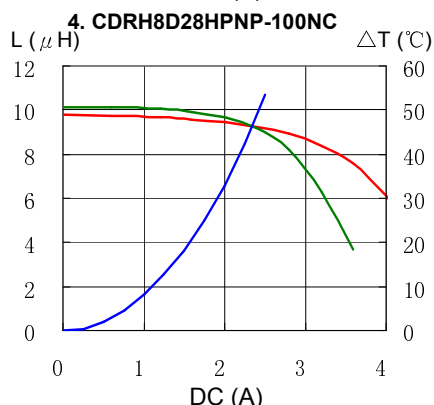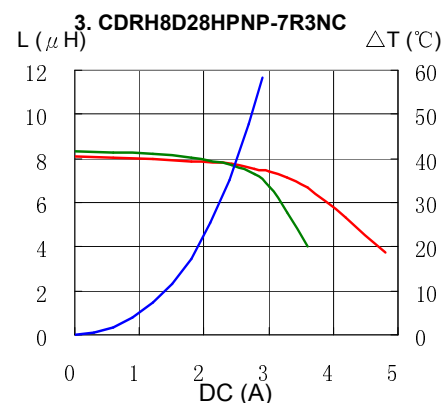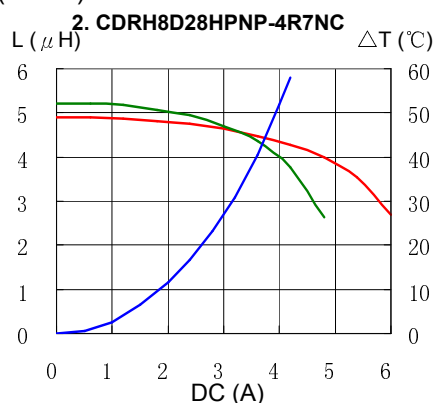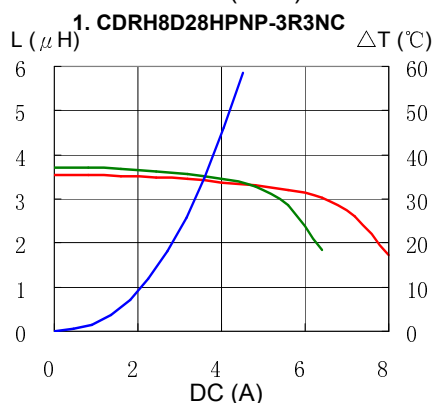

SMD Power Inductor CDRH8D28HP



Solder Reflow Condition

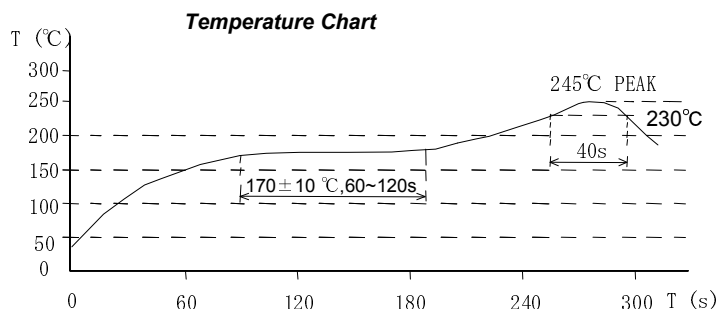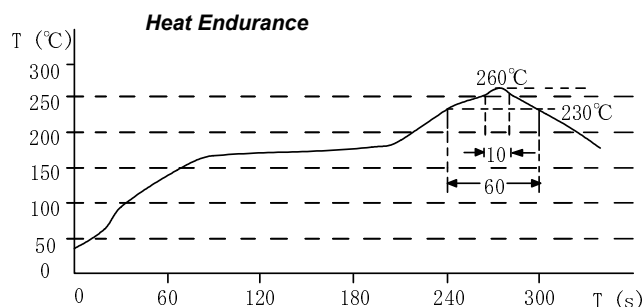

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com