



Distributor of NorComp : Excellent Integrated System Limited

Datasheet of 999-H15-PS2-571 - D-Sub Connector Receptacle, Female Sockets 15 Position
Panel Mount, Through Hole, Right Angle Solder

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[NorComp](#)

[999-H15-PS2-571](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DESCRIPTION: 15 POS HIGH DENSITY OVER (2) PS/2

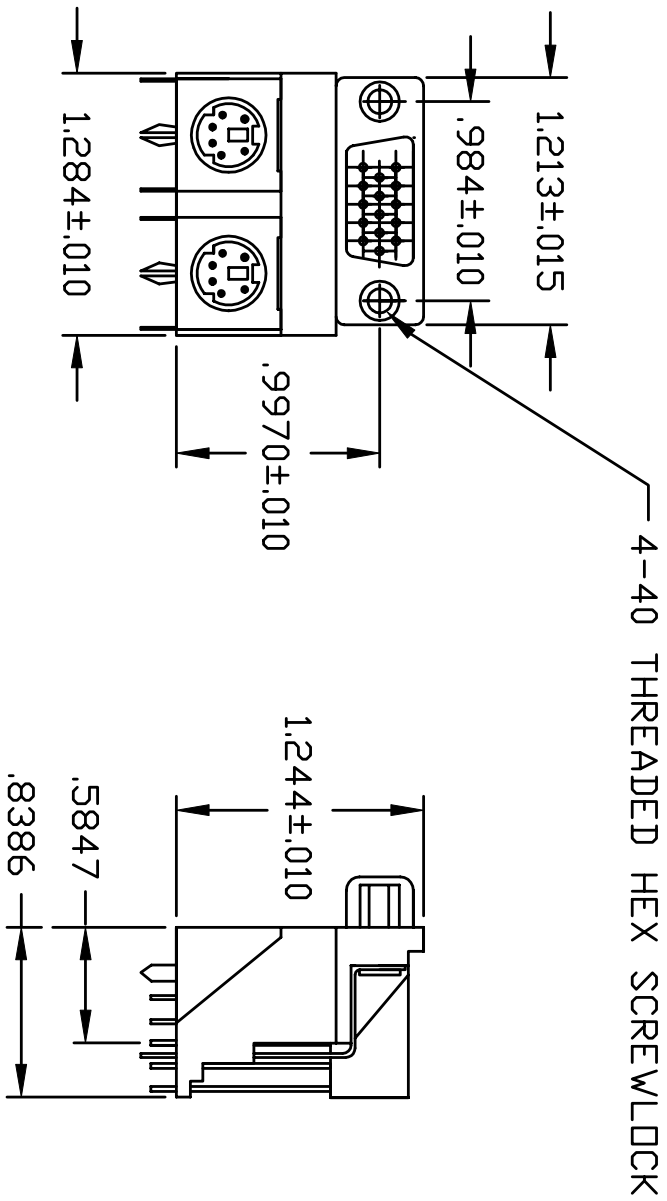

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes
 Dielectric Withstanding Voltage: AC 1000V/60 sec. r.m.s.
 Insulation Resistance: 5000 Megohms Minimum DC 500
 Contact Resistance: 25 Milliohms Maximum
 Operating Temperature: -55° to +105°

MATERIALS:

Contacts: Brass
 Insulator: PBT UL 94V-0
 High Density D-sub = Blue
 Mini-Din = Left Port = Purple
 Right Port = Green

Shell: Cold Roll Steel

PLATINGS:

Contacts: Gold Flash
 Shells: Nickel Plated



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS
 DATE: 4-30-01


CHECKED: DATE:

SCALE: SHEET 1 OF 2 REV 1

NorComp

DWG NO. 999-H15-PS2-571

DESCRIPTION: Footprint for High Rise PS/2

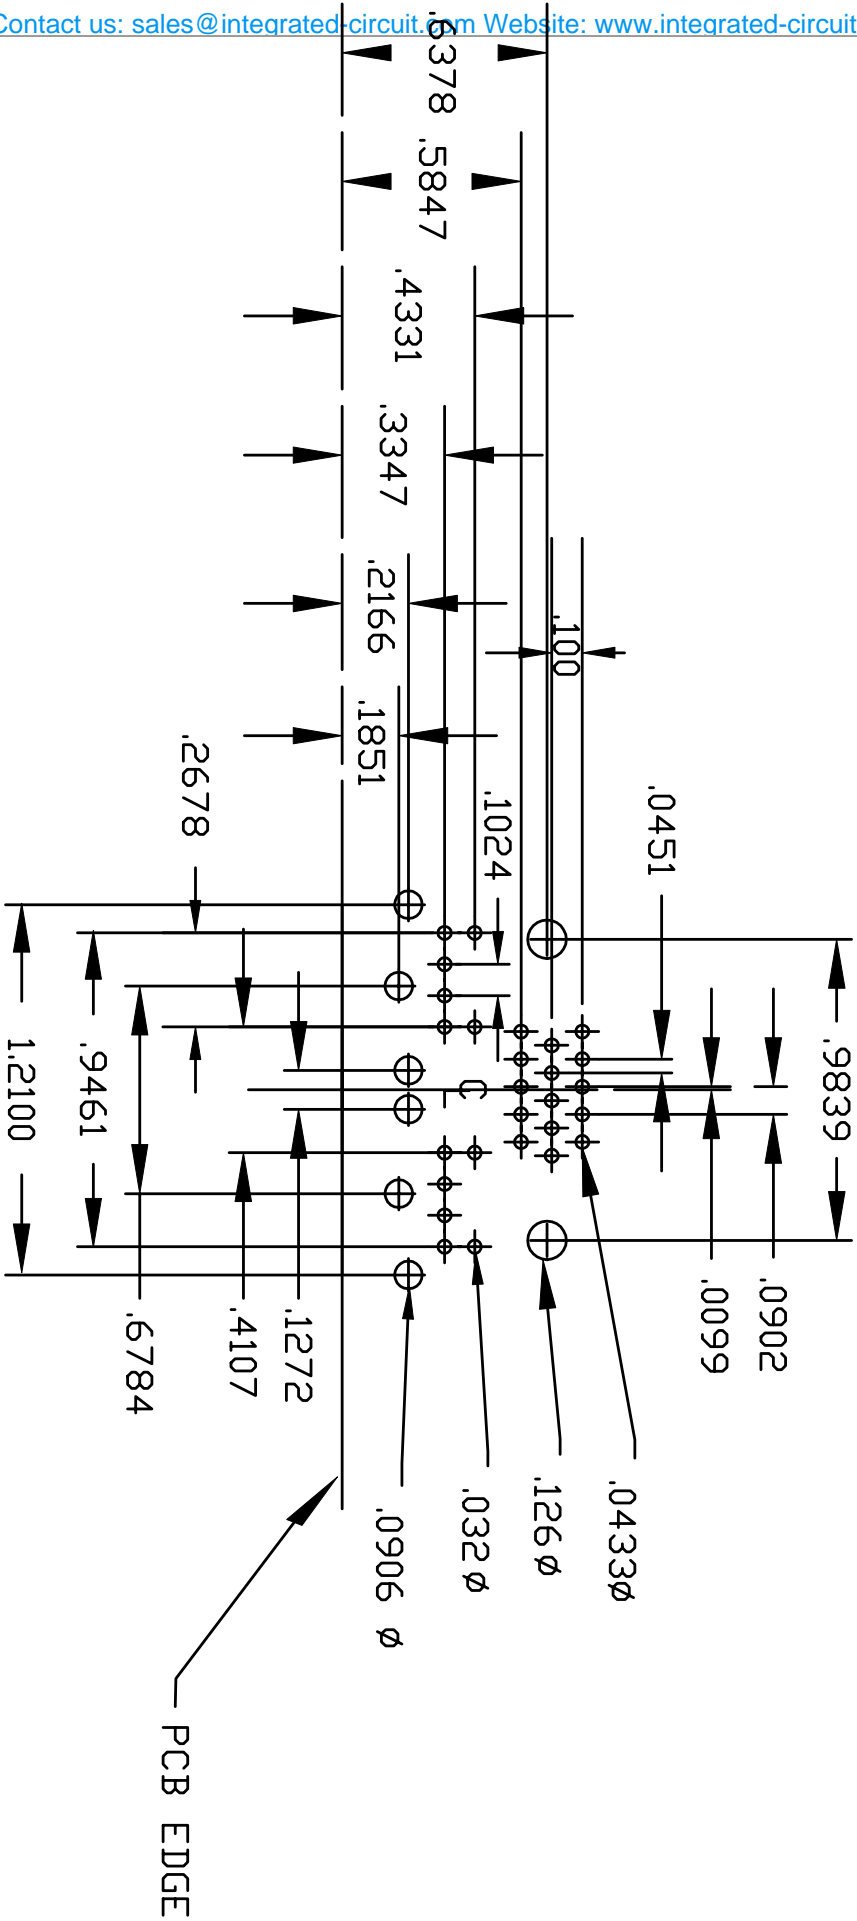

 THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: PAM JENKINS	DATE: 4-25-01
CHECKED:	DATE:
SCALE:	SHEET 2 OF 2
DWG NO. 999-H15-PS2-491	REV 3