



**Distributor of NorComp : Excellent Integrated System Limited**

Datasheet of 477-009-212-001 - D-Sub Connector Receptacle, Female Sockets 9 Position  
Through Hole Solder

Contact us: [sales@integrated-circuit.com](mailto:sales@integrated-circuit.com) Website: [www.integrated-circuit.com](http://www.integrated-circuit.com)

---

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[NorComp](#)

[477-009-212-001](#)




For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

DESCRIPTION: DIP SOLDER FILTERED D-SUB

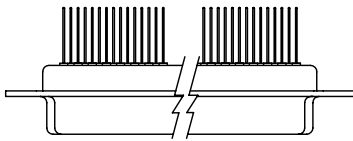

	A	B	C
9	1.204 30.60	.984 25.00	.480 12.20
15	1.535 39.00	1.312 33.30	.480 12.20
25	2.078 52.80	1.850 47.00	.480 12.20
37	2.724 69.20	2.500 63.50	.480 12.20
50	2.622 66.60	2.405 61.10	.598 15.2

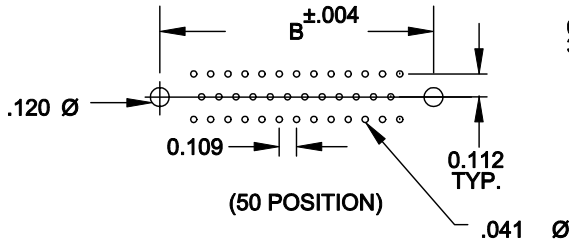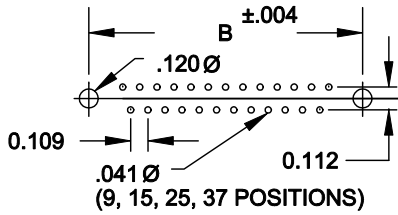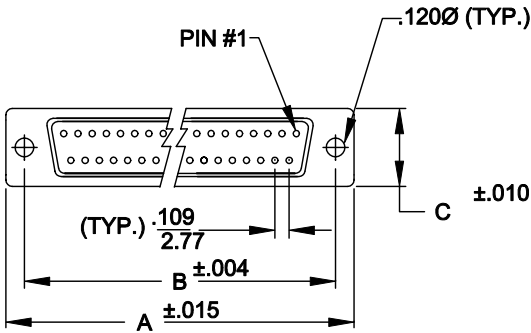

477-XXX-212-XX1

SERIES \_\_\_\_\_  
POSITIONS \_\_\_\_\_  
009 \_\_\_\_\_  
015 \_\_\_\_\_  
025 \_\_\_\_\_  
037 \_\_\_\_\_  
050 \_\_\_\_\_  
GENDER \_\_\_\_\_  
1 = MALE  
2 = FEMALE  
TERMINATION \_\_\_\_\_  
1 = VERTICAL DIP SOLDER  
2 = TIN  
HARDWARE OPTIONS \_\_\_\_\_  
00 = NO HARDWARE  
31 = 4-40 THREADED INSERT  
PLATING OPTIONS \_\_\_\_\_  
1 = GOLD FLASH


**SPECIFICATIONS:**

**MATERIALS:**

SHELL: STEEL, TIN PLATED  
INSULATOR: UL 94V-0 RATED PBTP  
GLASS-FIBER REINFORCED

**ELECTRICALS:**

INDIVIDUAL CAPACITOR VALUE = 1000 pF  
OTHER VALUES AVAILABLE: CONSULT FACTORY  
CURRENT RATING: 5 AMPS  
CONTACT RESISTANCE: <10 mOHMS  
INSULTOR RESISTANCE: 1000 OHMS  
VOLTAGE: 1 KV / AC  
TEMPERATURE: -55°C TO +125°C

 THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

**NorComp**

DRAWN: WAYNE ROBBINS		DATE: 9-03-98	
CHECKED:		DATE:	
SCALE: 1:1	SHEET 1 OF 1	REV 2	
DWG NO. 477-XXX-212-001			