

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>






Advanced Ferrite Materials, EMI Suppression, and Inductive Products

Home • Ferrite Product Lines • New Products • Technical • General • Contact • Steward Sales

DA1206C121R-00

STEWARD PART NUMBERING SYSTEM							
DA	1206	в	102	R -	00		
PRODUCT SERIES CODE	PART SIZE CODE	RATED CURRENT CODE	IMPEDANCE VALUE CODE		ADDITIONAL DESCRIPTION		
Ambient Operating Temperature Paper 55°C to + 125°C							

Ambient Operating Temperature Range :-55°C to + 125°C



Drawing Figure

Figure Number	
0	


Electrical Characteristics

NET Z @ 100 MHz	DCR Max	Rated Current mA
120	0.20	300

Physical Dimensions

A	В	C	D	D1	E	A	В	C	D	D1	E
mm	mm	mm	mm	mm	mm	in	in	in	in	in	in
3.20	1.60	0.80	0.40	0.20	0.80	0.126	0.063	0.031	0.016	0.008	0.031



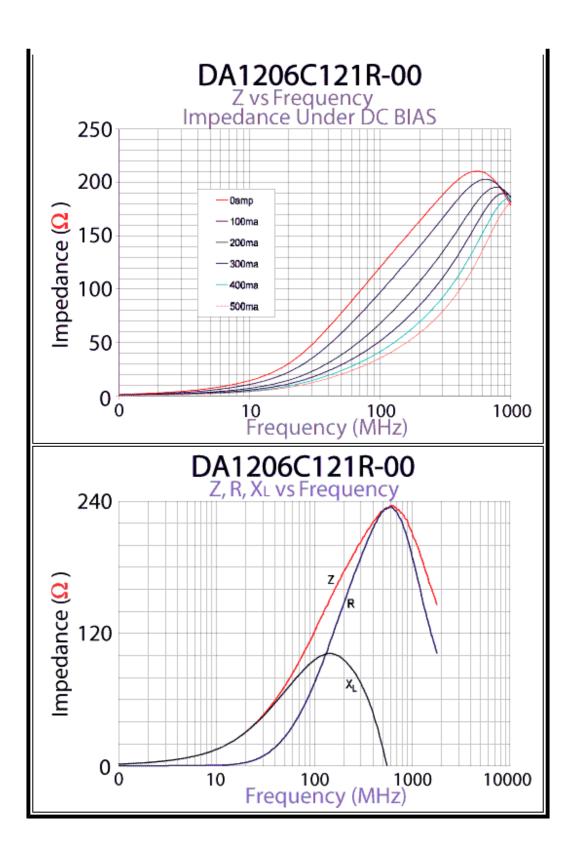



Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more information on any of the products listed above, please contact Steward customer service department at (800) 634-2673.

americas@steward.com

mexico@steward.com

europe@steward.com

asia@stew;

Copyright© 2004 Steward, Inc.

Last Updated: 2/25/2004