

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Dialight](#)
[5151023](#)


For any questions, you can email us directly:
sales@integrated-circuit.com



3mm Square
microLED[®] Optopipe[™]
Optical Light Pipe, Quad High



515-1023-803

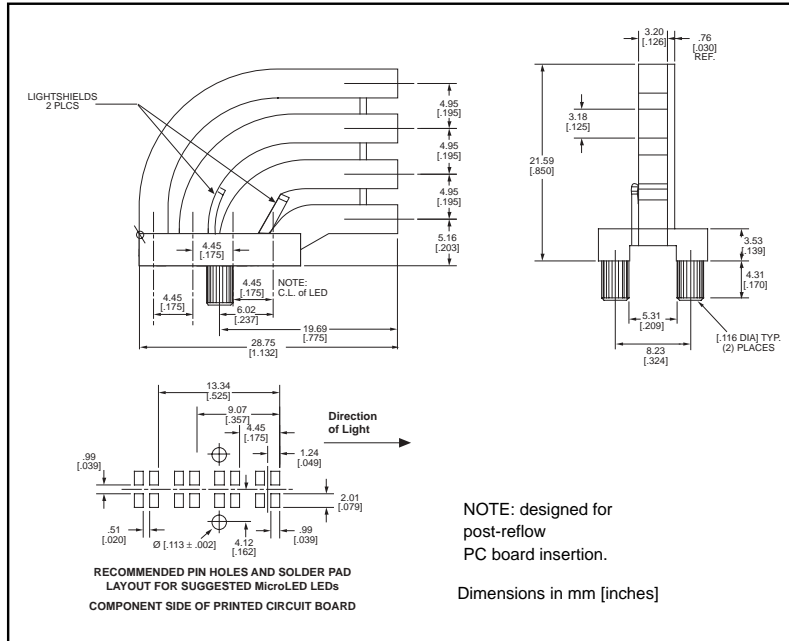

Recommended
MicroLED SMT LEDs
for use with 515-1023-803

2

PART NO.	COLOR	PAGE #
597-3001-1xx	Red	1-19
597-3111-1xx	AlGaAs Red	1-19
597-3211-1xx	Orange	1-19
597-3301-1xx	Green	1-19
597-3401-1xx	Yellow	1-19
597-7701-1xx	Red/Green	1-20
597-7721-1xx	Yellow/Green	1-20
597-7731-1xx	Red/Yellow	1-20

Features

- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Allows quad level SMT indicators
- Secures to PCB by press-fit

LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

Operating/Storage Temperature

-30°C to +100°C

Dialight Optopipe Light Pipe Description

This Optopipe[™] has a relatively low vertical height considering the number of light pipe elements. The element's square emitting surfaces are vertically spaced 0.203" from the PCB to the first element, and then 0.195" between each of the other elements. This Optopipe[™] is held in place by 2 press-fit pins on the bottom of the device. The wide base offers added stability to the installed part. The light pipe is not attached to the panel at any point, but protrudes through holes in the panel. This Optopipe[™] was specifically designed to accept Dialight's 597 Series Type 1210 LEDs. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe[™] solutions for your applications.