

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Lumex, Inc.](#)
[SSF-LXH340YGOD](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DATE	REVISIONS	REV
9-23-96	E.C.N. #10244./	A

DRAWING NUMBER	REV
SSF-LXH340YGOD	A

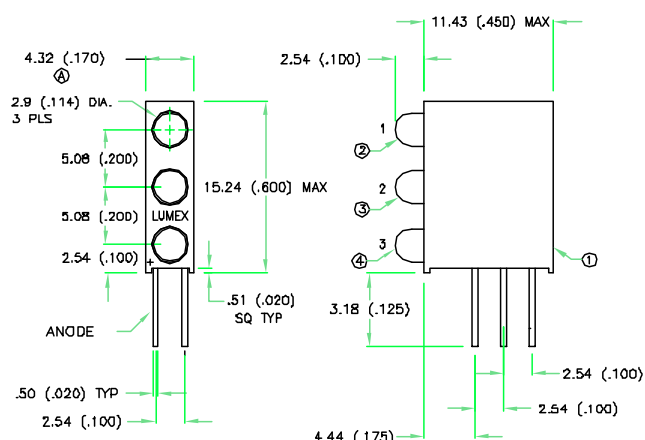

ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C If=20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	POS. 1	585	(YELLOW)	nm	
	POS. 2	565	(GREEN)	nm	
	POS. 3	630	(ORANGE)	nm	
FORWARD VOLTAGE		2.1	2.8	V _f	
REVERSE VOLTAGE	5.0			V _r	I _f =100uA
AXIAL INTENSITY		15		mcd	I _f =20mA
VIEWING ANGLE		80		2x theta	
EMITTED COLOR:	POS.1-YELLOW	POS.2-GREEN	POS.3-ORANGE		
EPOXY LENS FINISH:	YELLOW, GREEN, ORANGE DIFFUSED				

LIMITS OF SAFE OPERATION AT 25 DEG. C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT(Y/C/O)	30/25/30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25 °C	-1.6	mW/ °C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
LEAD SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		3 SEC. MAX

* t<10uS

BILL OF MATERIALS:

- SSH-LXH340 HOLDER. MATERIAL: BLACK NYLON 94V-0.
- SSL-LX3044YD LED.
- SSL-LX3044GD LED.
- SSL-LX3044OD LED.

RELIABILITY NOTE:

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX OPTO COMPONENTS INC.		290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (847) 359-2790	
<small>CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</small>			
DATE: 6-28-96	DWN:	CHK'D:	APPD:
SCALE: N/A			
T-3mm LED, RIGHT ANGLE FAULT INDICATOR, YELLOW/GREEN/ORANGE DIFFUSED			
PAGE 1 OF 1	DRAWING NUMBER SSF-LXH340YGOD	REV A	