

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

C&K Components BTN MDP 00

For any questions, you can email us directly: sales@integrated-circuit.com

Distributor of C&K Components: Excellent Integrated System Limited

Datasheet of BTN MDP 00 - CAP PUSHBUTTON SQUARE WHITE

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

MD and MDP Key Switches



The disc contact type ED is a momentary key switch with short travel and good tactile feedback.

The ED is the main component of the MD and MDP switches.

MDP-Disc push-button key switch

Small momentary key switch equipped with button, can be mounted on printed circuit board.

MD-Disc push-button key switch

Small momentary key switch including a protective rubber actuator.

A wide range of keyboards can be built by using the MD.

MD and MDP key pads are available in two contact materials:

- gold plated bronze
- silver plated bronze

| Construction | | | | |
|-----------------------------|---------------|--|---------------------------------|--|
| Function | | Momentary | | |
| Contact arrangement | | 1 make contact = SF | PST | |
| Distance between button | centers, min. | 12.7 (0.500) | | |
| Terminals | | PC pins | | |
| Electrical data | | Silver | Gold | |
| Switching power max. | | 6 W AC/DC | 3 W AC/DC | |
| Switching voltage max. | | 100 V AC/DC | 100 V AC/DC | |
| Switching current max. | | 100 mA AC/DC | 50 mA AC/DC | |
| Dielectric strength (50 Hz/ | /1 Min.) | 300 V | 300 V | |
| Operating life with | MD | ≥ 10 ⁶ | $\geq 5 \times 10^6$ | |
| max. switching power | MDP | $\geq 2 \times 10^5$ | $\geq 2 \times 10^5$ | |
| Contact resistance, initial | | \leq 10 m Ω | \leq 15 m Ω | |
| Insulation resistance | | $\geq 10^{11} \Omega$ | $\geq 10^{11} \Omega$ | |
| Contact bounce | | ≦ 100 μs | ≦ 100 μs | |
| Mechanical data | | MD | MDP | |
| Switching travel | | 0.6 (0.0236) | 0.3 (0.0118) | |
| Operating force | | 2.6N ± 25% (260 grams ± 25%) | 2.4N ± 25% (240 grams ± 25%) | |
| Further data | | | | |
| Contact material | | Silver, Gold | | |
| Operating temperature | | − 25°C to + 70°C¹) | | |
| Storage temperature | <u> </u> | - 40°C to + 85°C | | |
| 0.0 .1 . (1) | | | | |

i) Special design for ambient temperature – 40°C to + 85°C (Type MD40) available (not washable in solvents) Note: MD40 disc keyswitch conforms to climatic category 40/85/56.

10 for silver version 56 for gold version 255°C for 5 seconds




Climatic category (days)

Soldering by static bath



MD and MDP Key Switches

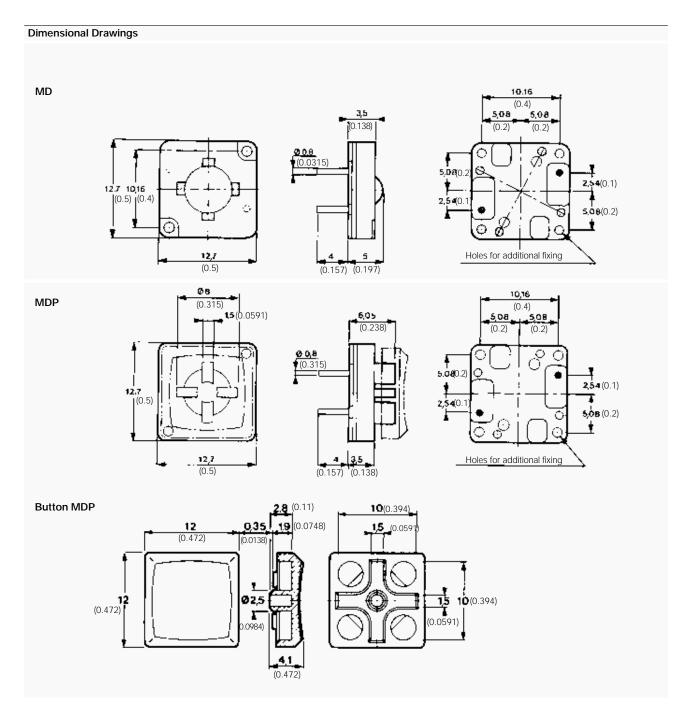

| Orderii | ng code | 1 | 2 | 3 |
|---------|---|-------------|----------|----------|
| | Example: | MD | AG | 04 |
| 1 | Designation: MD, MDP, MD40 | - | A | A |
| 2 | Contact material: AG = silver, AU = gold | | | |
| 3 | MDP button color: 01 = black, 02 = white, 03 = red, 04 = light grey, 05 = dark grey, 07 = blue | > | - | |



Dimensions are shown in mm (inch) Dimensions subject to change