

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electronic Components](#)  
[10TPC33MB](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Surface mount type

# TPB/TPC Series

RoHS compliance  
 Standard


TPB series are the standard products.  
 TPC series are low-profile products derived from the TPB series.  
 B2 size is the miniaturized version of TPB series.



## Specifications

Items	Condition	Specifications				
Rated voltage (V)	—	4.0	6.3	8.0	10	12.5
Surge voltage (V)	—	4.6	7.2	9.2	12	14
Category temperature range (°C)	—	-55 to +105				
Capacitance tolerance (%)	120Hz/20°C	M : ±20				
Rated capacitance range (μF)	120Hz/20°C	33 to 470				
Dissipation Factor (DF)	120Hz/20°C	Please see the attached characteristics list				
Leakage current	Rated voltage applied, after 5 minutes	Please see the attached characteristics list				
Equivalent series resistance (ESR)	100kHz/+20°C	Please see the attached characteristics list				
Characteristics of impedance ratio at high temp. and low temp.	100kHz/20°C	-55°C	Z/Z <sub>20°C</sub>	0.6 to 2.0		
		+105°C	Z/Z <sub>20°C</sub>	0.6 to 2.0		
Endurance	105°C, 2,000h B2 size : 105°C, 1,000h, Rated voltage applied *Rated temp. 85°C products: 85°C, 1,000h, rated voltage applied	ΔC/C	Within±20% of the initial value			
		DF	≤ 1.5 times of the initial limit			
		LC	Within the initial limit			
Damp heat (Steady State)	60°C, 90 to 95%RH, 500h, No-applied voltage	ΔC/C	Within+40%,-20% of the initial value			
		DF	≤ 1.5 times of the initial limit			
		LC	≤ 3 times of the initial limit			
Surge	105°C, 1,000 cycles, 1 kΩdischarge resistance, surge voltage applied *Rated temp. 85°C products:85°C	ΔC/C	Within±5% of the initial value			
		DF	Within the initial limit			
		LC	≤ 3 times of the initial limit			

## Dimensions

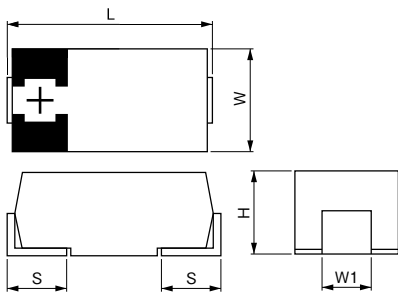

(unit: mm)

Size code	L ±0.2*1	W ±0.2	H ±0.1*2	S ±0.2	W1 ±0.1
B1	3.5	2.8	1.1	0.8	2.2
B2	3.5	2.8	1.9	0.8	2.2
D2	7.3	4.3	1.9	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

\*1 ±0.3:D3L, D4  
 \*2 ±0.2:D3L, D4

## Size list

RV : Rated voltage

RV \ μF	4.0	6.3	8.0	10.0	12.5
10					B1
15					B1
22			B1		
33		B1		B1,B2	
47		B1		B2	
68	B2	B2		D2	
100		D2		D2	
150		D2	D2	D3L	
220		D3L		D3L,D4	
330	D3L	D2,D3L,D4		D4	
470		D4			

Surface mount type **TPB/TPC** Series

● TPB series characteristics list

Size code	Part number	Rated voltage (V)	Rated temperature (°C)	Rated capacitance (μF)	Category voltage (V)	Category temperature (°C)	DF (% max)	LC (μA) max/5min.	ESR (mΩmax) 100kHz/20°C	Maximum allowable ripple current (mA rms) 100kHz <sup>※1</sup>	MSL	
											Reflow temp. ≤ 260°C	Reflow temp. ≤ 250°C
B2	10TPB47M	10	105	47	10	105	8.0	47.0	70	1100	3	3
	10TPB33M	10	105	33	10	105	8.0	33.0	70	1100	3	3
	6TPB68M	6.3	105	68	6.3	105	8.0	42.8	70	1100	3	3
	4TPB68M	4.0	105	68	4.0	105	8.0	27.2	70	1100	3	3
D3L	10TPB220ML	10	105	220	10	105	10.0	220.0	40	2000	—	2a
	10TPB150ML	10	105	150	10	105	10.0	150.0	40	2000	3	2a
	6TPB330ML	6.3	105	330	6.3	105	10.0	207.9	40	2000	3	2a
	6TPB330MAL	6.3	85	330	5.0	105	10.0	207.9	40	2000	3	2a
	6TPB220ML	6.3	105	220	6.3	105	10.0	138.6	40	2000	3	2a
	4TPB330ML	4.0	105	330	4.0	105	10.0	132.0	40	2000	3	2a
D4	10TPB330M	10	105	330	10	105	10.0	330.0	35	3000	—	2a
	10TPB220M	10	105	220	10	105	10.0	220.0	40	3000	3	2a
	6TPB470M	6.3	105	470	6.3	105	15.0	296.1	35	3000	3	2a
	6TPB330M	6.3	105	330	6.3	105	10.0	207.9	40	3000	3	2a

※1 100k to 500kHz,45°C

● TPC series characteristics list

Size code	Part number	Rated voltage (V)	Rated temperature (°C)	Rated capacitance (μF)	Category voltage (V)	Category temperature (°C)	DF (% max)	LC (μA) max/5min.	ESR (mΩmax) 100kHz/20°C	Maximum allowable ripple current (mA rms) 100kHz <sup>※1</sup>	MSL	
											Reflow temp. ≤ 260°C	Reflow temp. ≤ 250°C
B1	12TPC15M	12.5	85	15	10	105	10.0	18.8	80	800	3	3
	12TPC10M	12.5	85	10	10	105	10.0	12.5	80	800	3	3
	10TPC33MB	10	85	33	8.0	105	10.0	33.0	70	1000	3	3
	8TPC22M	8.0	85	22	6.3	105	10.0	17.6	70	1000	3	3
	6TPC47MB	6.3	85	47	5.0	105	10.0	29.6	70	1000	3	3
	6TPC47M	6.3	85	47	5.0	105	10.0	29.6	55	1100	3	3
D2	10TPC100M	10	105	100	10	105	10.0	100.0	45	1700	3	2a
	10TPC68M	10	105	68	10	105	10.0	68.0	45	1700	3	2a
	8TPC150M	8.0	105	150	8.0	105	10.0	120.0	40	1900	3	2a
	6TPC330MA	6.3	85	330	5.0	105	10.0	207.9	40	1900	3	2a
	6TPC150M	6.3	105	150	6.3	105	10.0	94.5	40	1900	3	2a
	6TPC100M	6.3	105	100	6.3	105	10.0	63.0	45	1700	3	2a

※1 100k to 500kHz,45°C

Selection guide	Series system diagram
	Image of case size
	Products list

Technical data	Recommended soldering condition
	Fundamental structure
	Characteristics
	Reliability

Surface mount type	SVPF
	SVPE
	SVPS
	SVPD
	SVPC
	SVPB
	SVPA
	SVQP

Radial lead type	SEPF
	SEPC
	SEQP
	SEP

Selection guide	Series system diagram
	Image of case size
	Explanation of part numbers

Technical data	Marking
	Recommended land pattern dimension
	Recommended soldering condition
	Fundamental structure

Surface mount type	TPU
	TPH
	TPG
	TPSF
	TPE
	<b>TPB/TPC</b>
	TPL·TPLF
	TPF
	TA
	TV
TH	