

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Dialight](#)
[5580201808](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



ASSEMBLY P/N	V _F (V)		I _F (mA)		LED EPOXY COLOR	LED CHIP	PEAK WAVE λ (nm)	LUM. INT. I _F (mcd)		REVERSE VOLT. V _F MIN. (V)	REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
	TYP	MAX	TYP	MAX				MIN	TYP								
558-0201-808	2.1	3.0	10	25	GREEN DIFF.	GoP	563	3.6	10.0	3	A		NEW RELEASE	CB			7/2/08

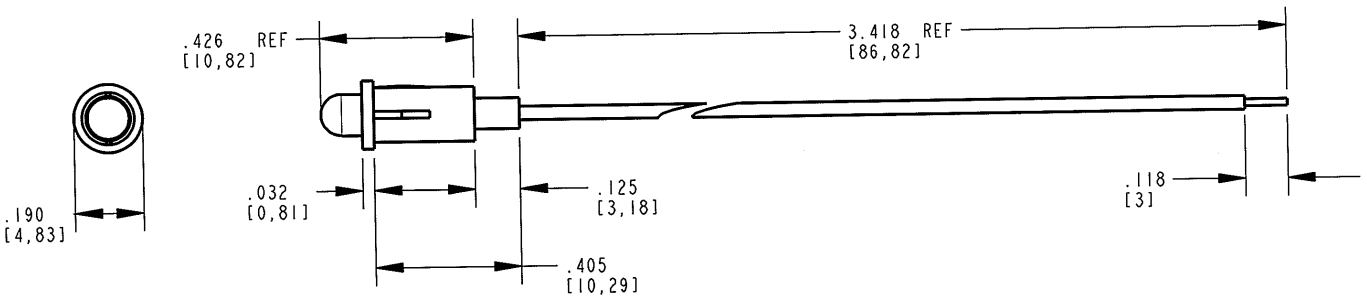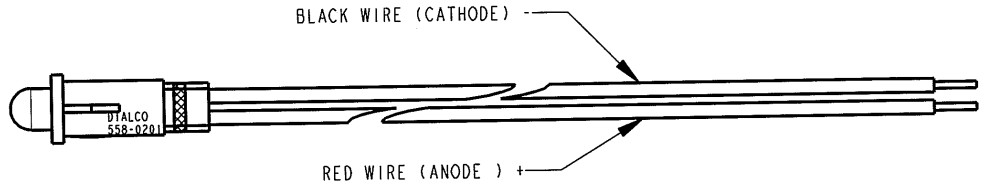

- NOTES:
1. REQUIRES EXTERNAL RESISTOR.
 2. 26 AWG LEAD WIRES.
 3. RECOMMENDED MOUNTING HOLE: .155/.158 DIA. ON PANELS .031 THRU .062 THICK.
 4. DIALIGHT PART NUMBER: 558-0201-808.

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: 2.500	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17271	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: ±1/64	LED SNAP-IN, PANEL IND. (GREEN DIFF.)	
DECIMALS (.XX): ±.01	MATERIAL	
DECIMALS (.XXX): ±.005	Dialight	
DECIMALS (.XXXX): ±.0005	1501 ROUTE 34 SOUTH	
ANGLES: ±1°	FARMINGDALE, NJ 07727	
FINISH:	FSCM 83330	
SHEET 1 OF 1 FAMILY TABLE:		